



LED FLOODLIGHT 150W - SERIES B
PRODUCT OUTDOOR



ASLED LIGHT CO.,LTD

LED FLOODLIGHT 150W

SPECCIFICATION



SPECCIFICATION


- Order Code: FB150, FB150RGBW
- Input Voltage: 24VDC, 48VDC, 220VAC
- Dimension: L260xW246xH103 mm
- Chip LED: CREE
- Power consumption: 150W
- Lumen Output: 13.500 lm
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color[CRI]: 3000K, 4000k, 5000k, RGBW
- CRI: >90
- Beam angle: 12° 15° 24° 36° 50°
- IP Rating: IP68
- Life time: 50.000 hour
- Control: ON/OFF, DIM 0 - 10V, DALI, DMX512
- Standards:
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires



LED FLOODLIGHT 150W

TECHNICAL DETAILS



TECHNICAL DETAILS

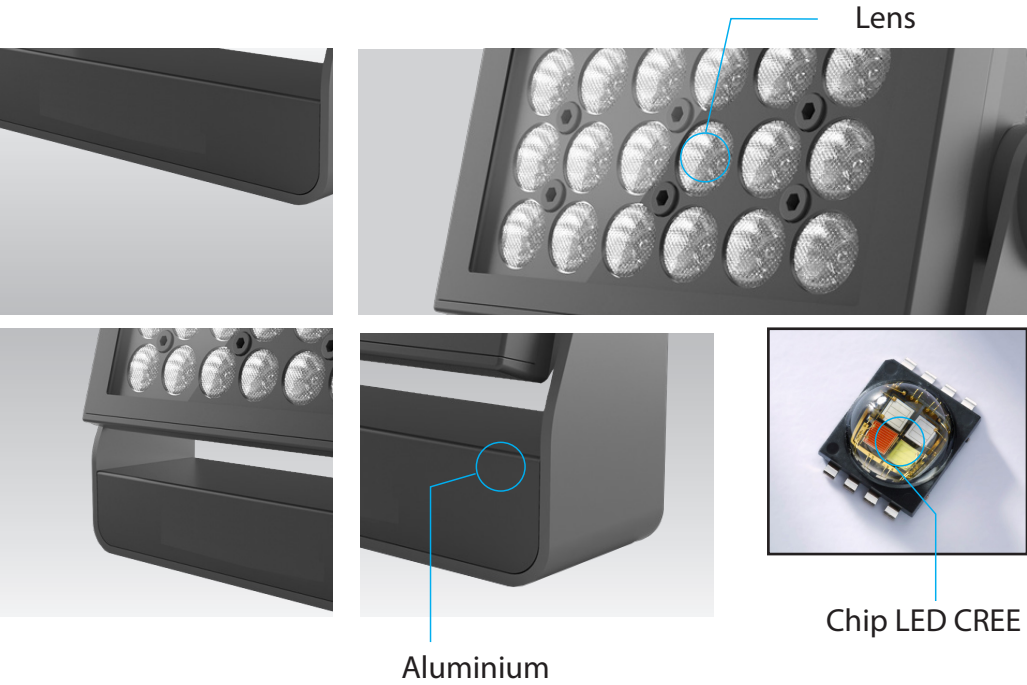



Legace

Select Color XX

Lens Clear





DIMENSIONS

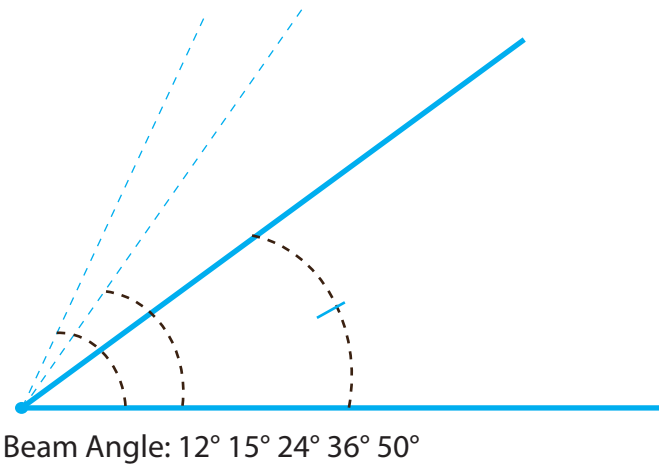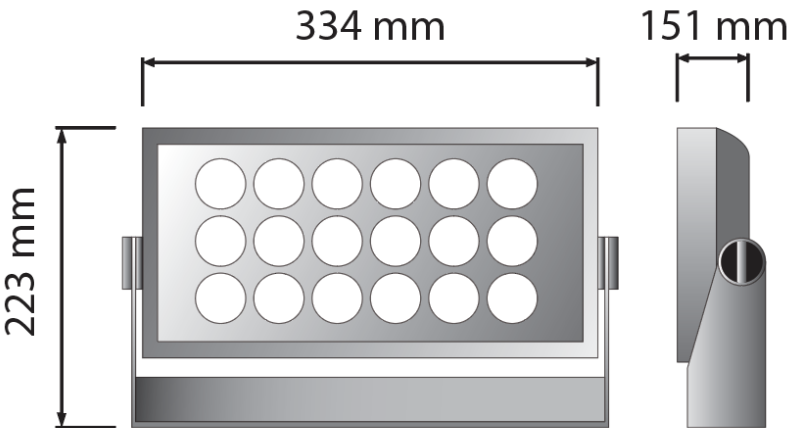


LED FLOODLIGHT 150W

SPECIFICATION


PHOTOMETRIC CURVE BEAM 36° AMPLITUDE DIAGRAM

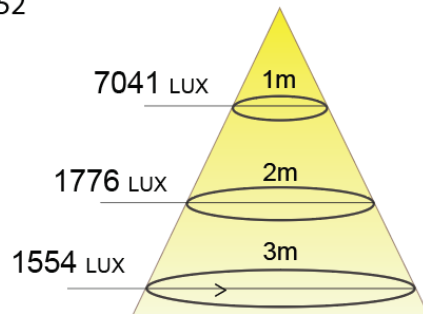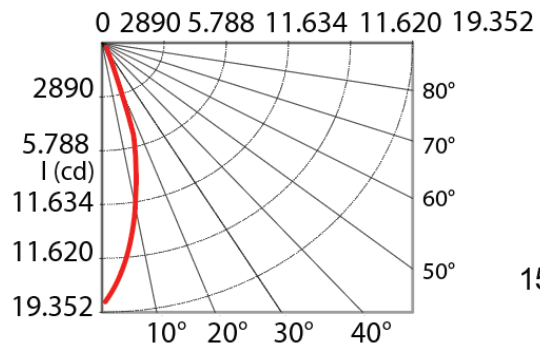

INSTALLATION

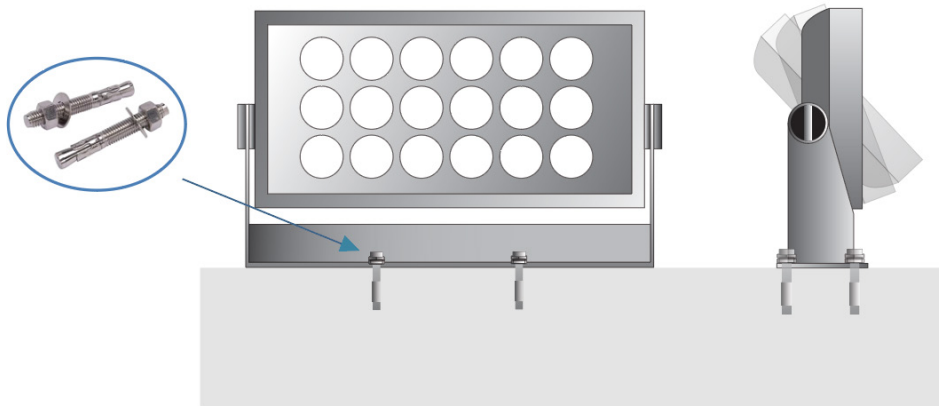


CONNECTOR IP68

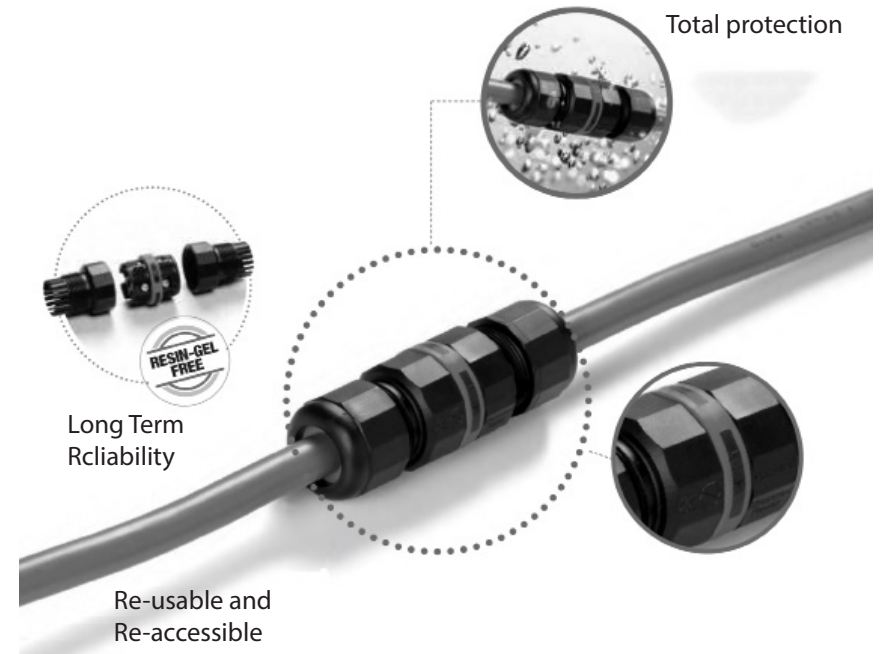

LED FLOODLIGHT 150W


05

POWER SUPPLIES - INPUT VOTAGE

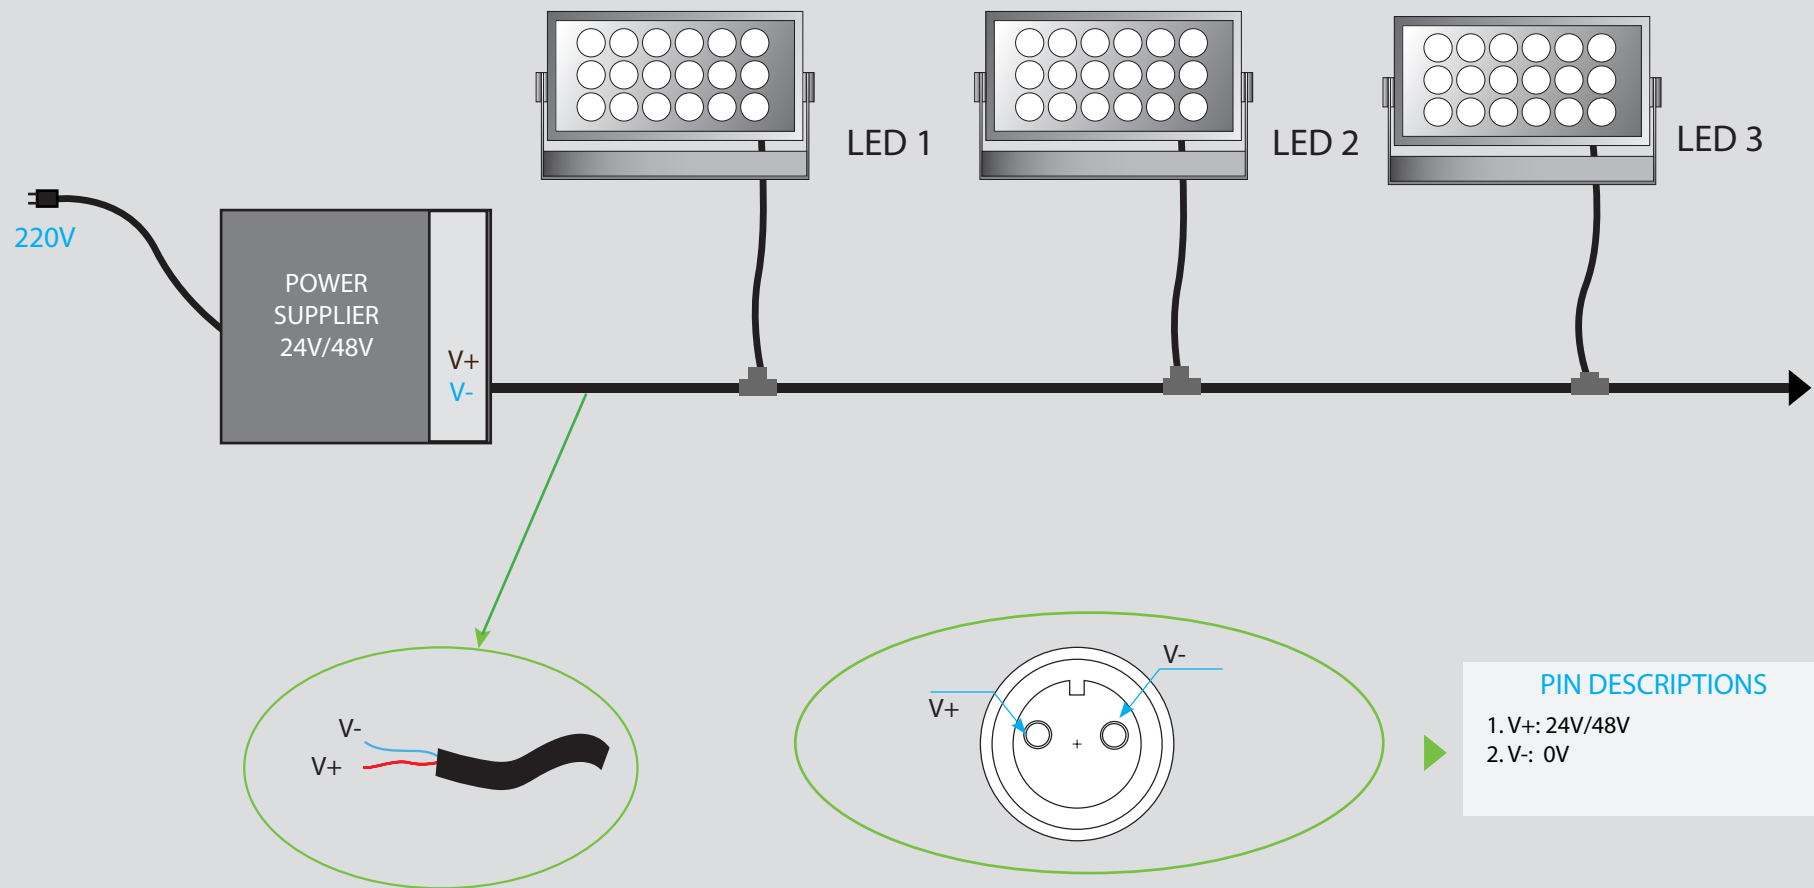

LED FLOODLIGHT 150W


DIAGRAM CONNECTOR - DMX PROTOCOL - 4 CORE & DECODER

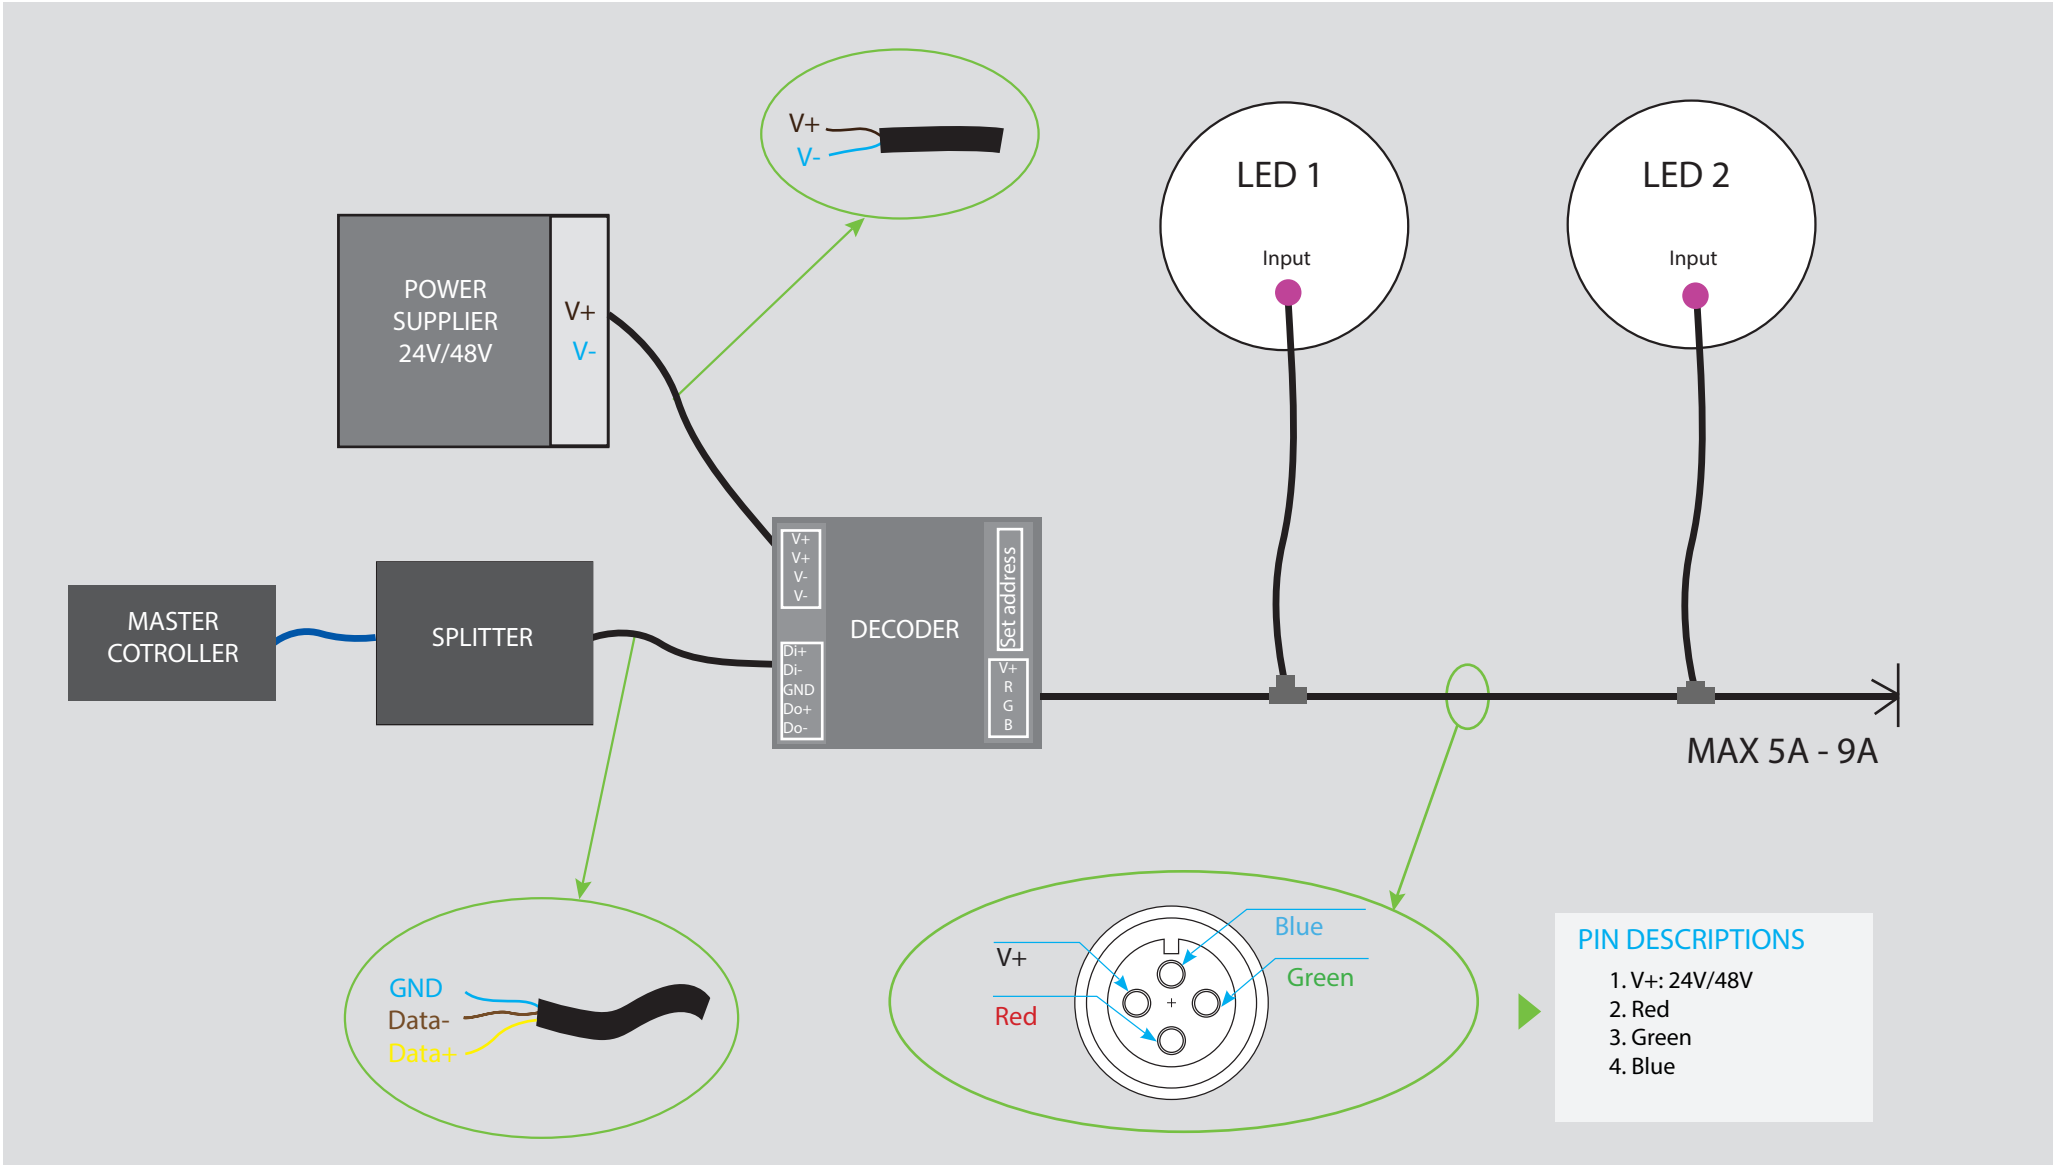

LED FLOODLIGHT 150W


07

DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE

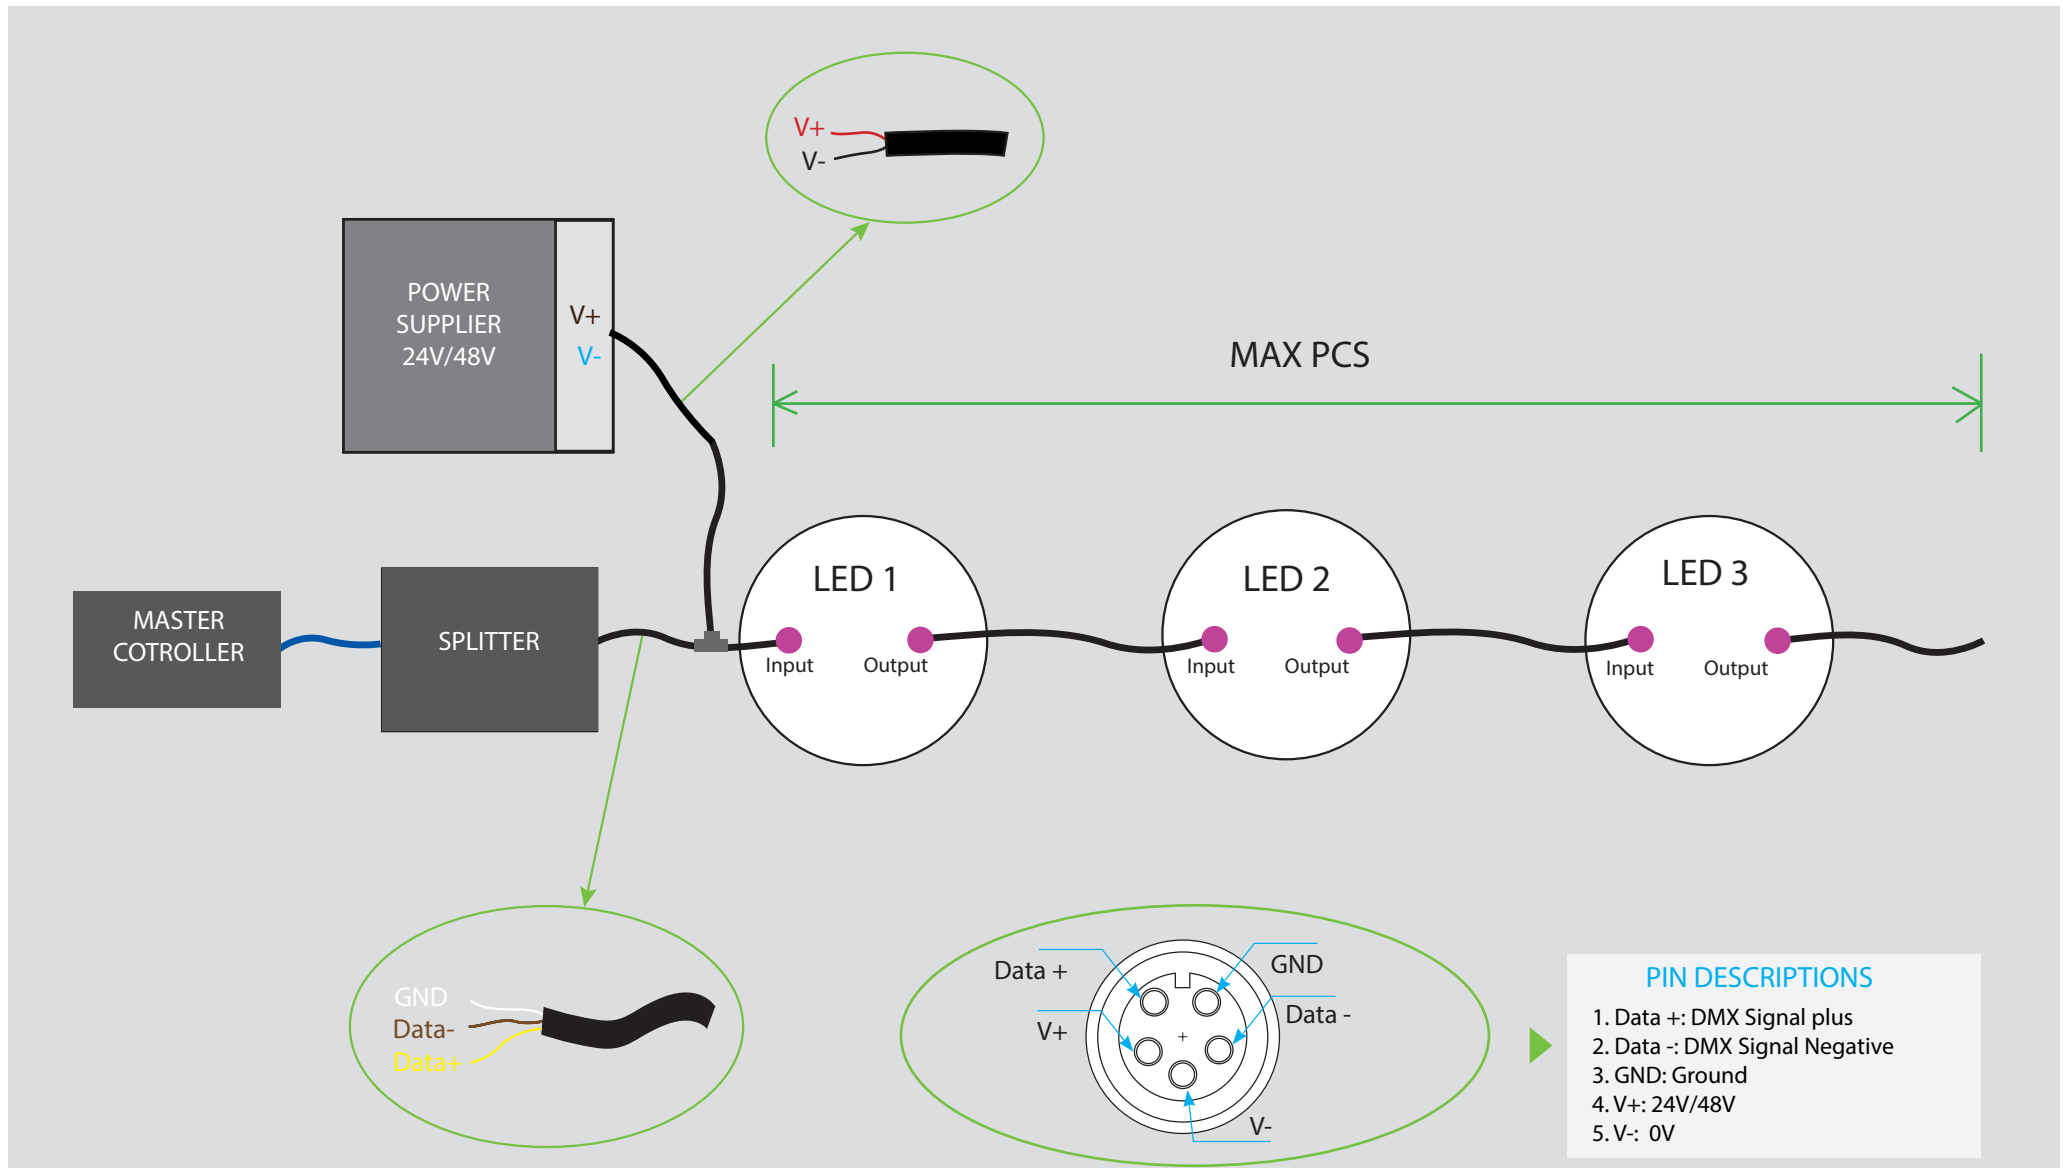

LED FLOODLIGHT 150W - Applications

08



OUTDOOR



LANDSCAPE



HOTEL/RESTAURANT



FACADE BUILDING



LED FLOODLIGHT 150W - Applications





THANKS FOR YOUR
ATTENTION