



LED INGROUND LIGHT 6W - SERIES B
PRODUCT OUTDOOR



ASLED

ASLED LIGHT CO.,LTD

LED INGROUND LIGHT 6W

SPECCIFICATION



SPECCIFICATION

- Order Code: IB006
- Input Voltage: 24VDC, 220V
- Dimension: Ø100xH125 Cutout Ø60mm
- Chip LED: CREE
- Power consumption: 2x3W
- Lumen Output: 2x270 lm
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color[CRI]: 3000K, 4000k, 5000k, RGBW
- CRI: >90
- Beam angle: 12° 24° 36° 50°
- IP Rating: IP68
- Life time: 50.000 hour
- Control: ON/OFF, DIM 0 - 10V, DALI, DMX512
- Standards:
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires




LED INGROUND LIGHT 6W


03

TECHNICAL DETAILS



TECHNICAL DETAILS

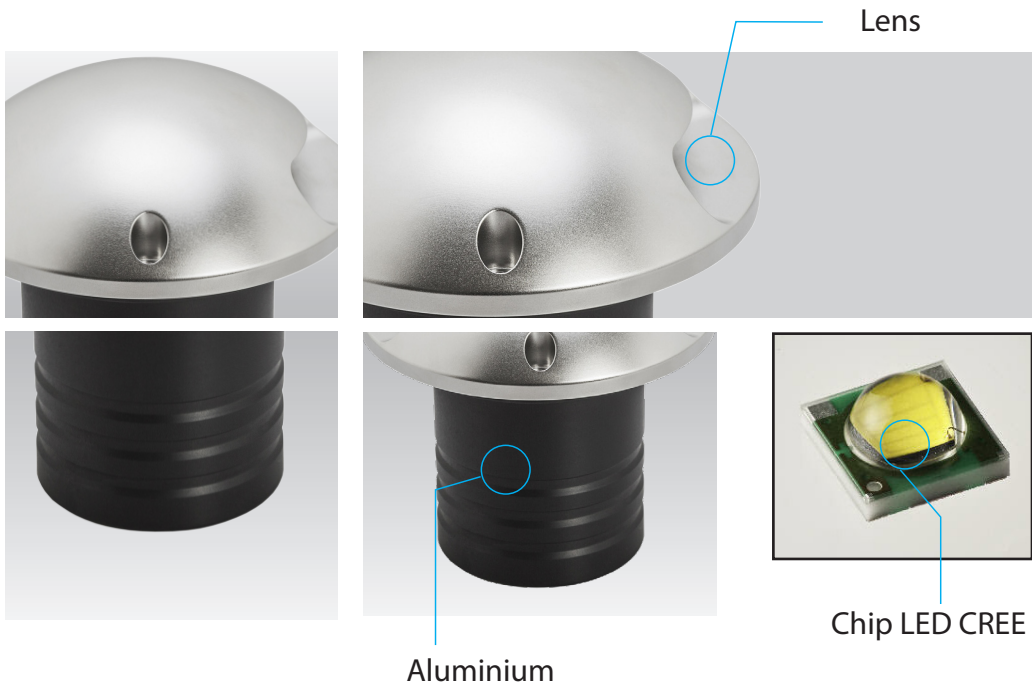

BEAM ANGLE

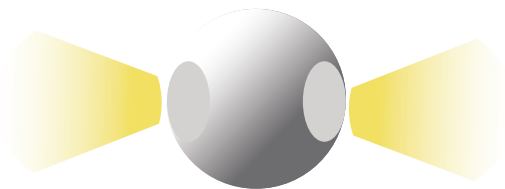


DIMENSIONS

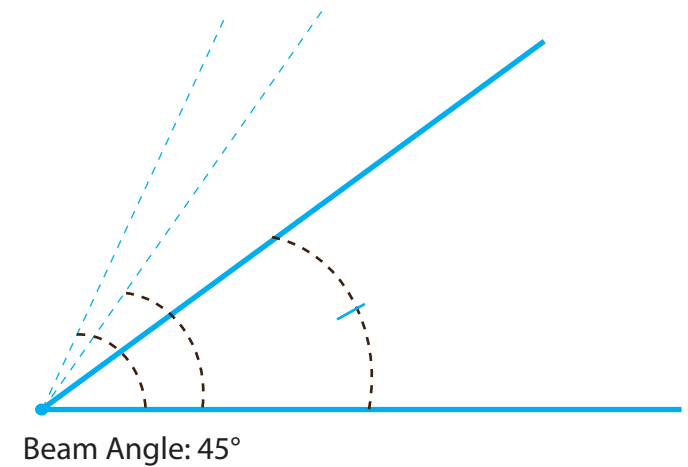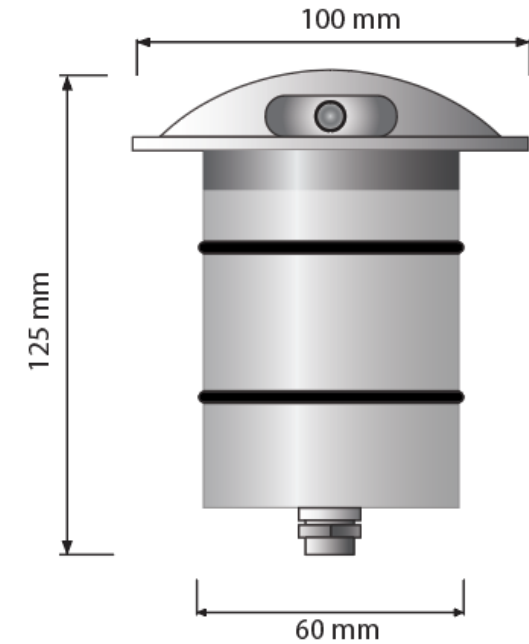


LED INGROUND LIGHT 6W

SPECIFICATION

PHOTOMETRIC CURVE

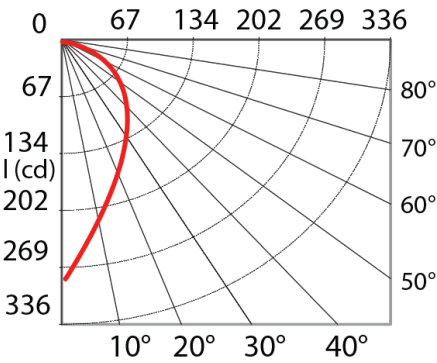


BEAM 45° AMPLITUDE DIAGRAM

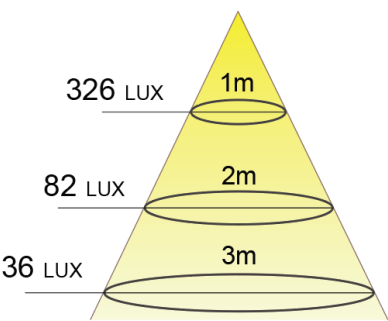


INSTALLATION

Option 1

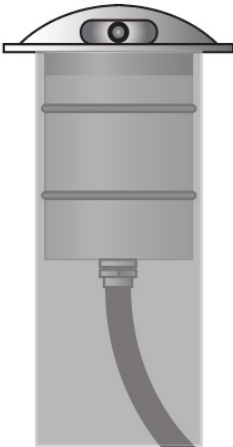


Option 2

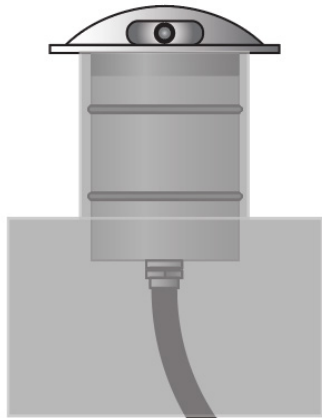

Input
Votage

Input
Votage


CONNECTOR IP68

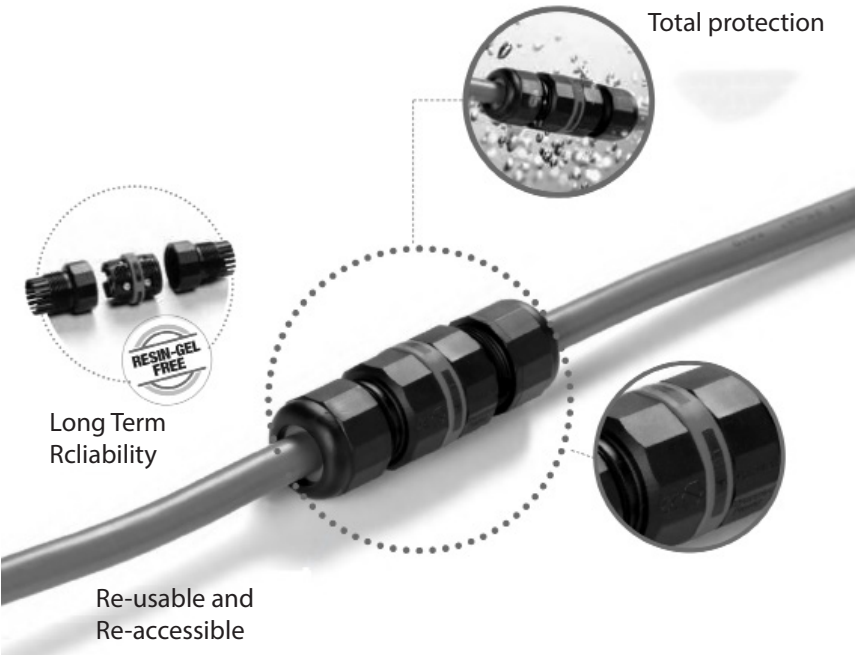

LED INGROUND LIGHT 6W


05

POWER SUPPLIES - INPUT VOTAGE

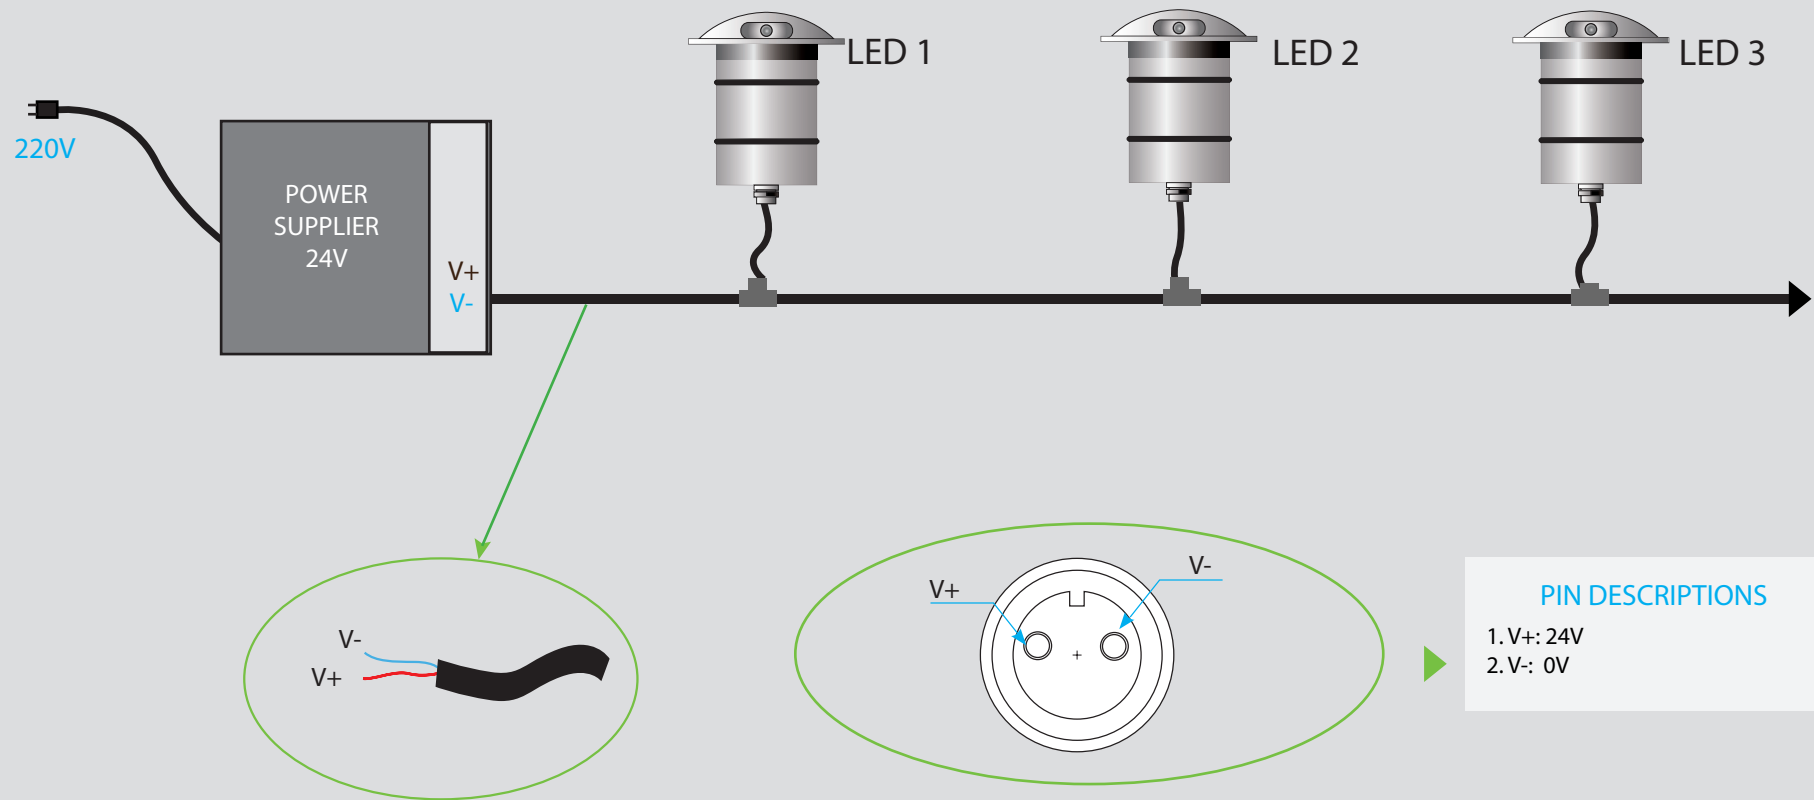


LED INGROUND LIGHT 6W

DIAGRAM CONNECTOR - DMX PROTOCOL - 4 CORE & DECODER

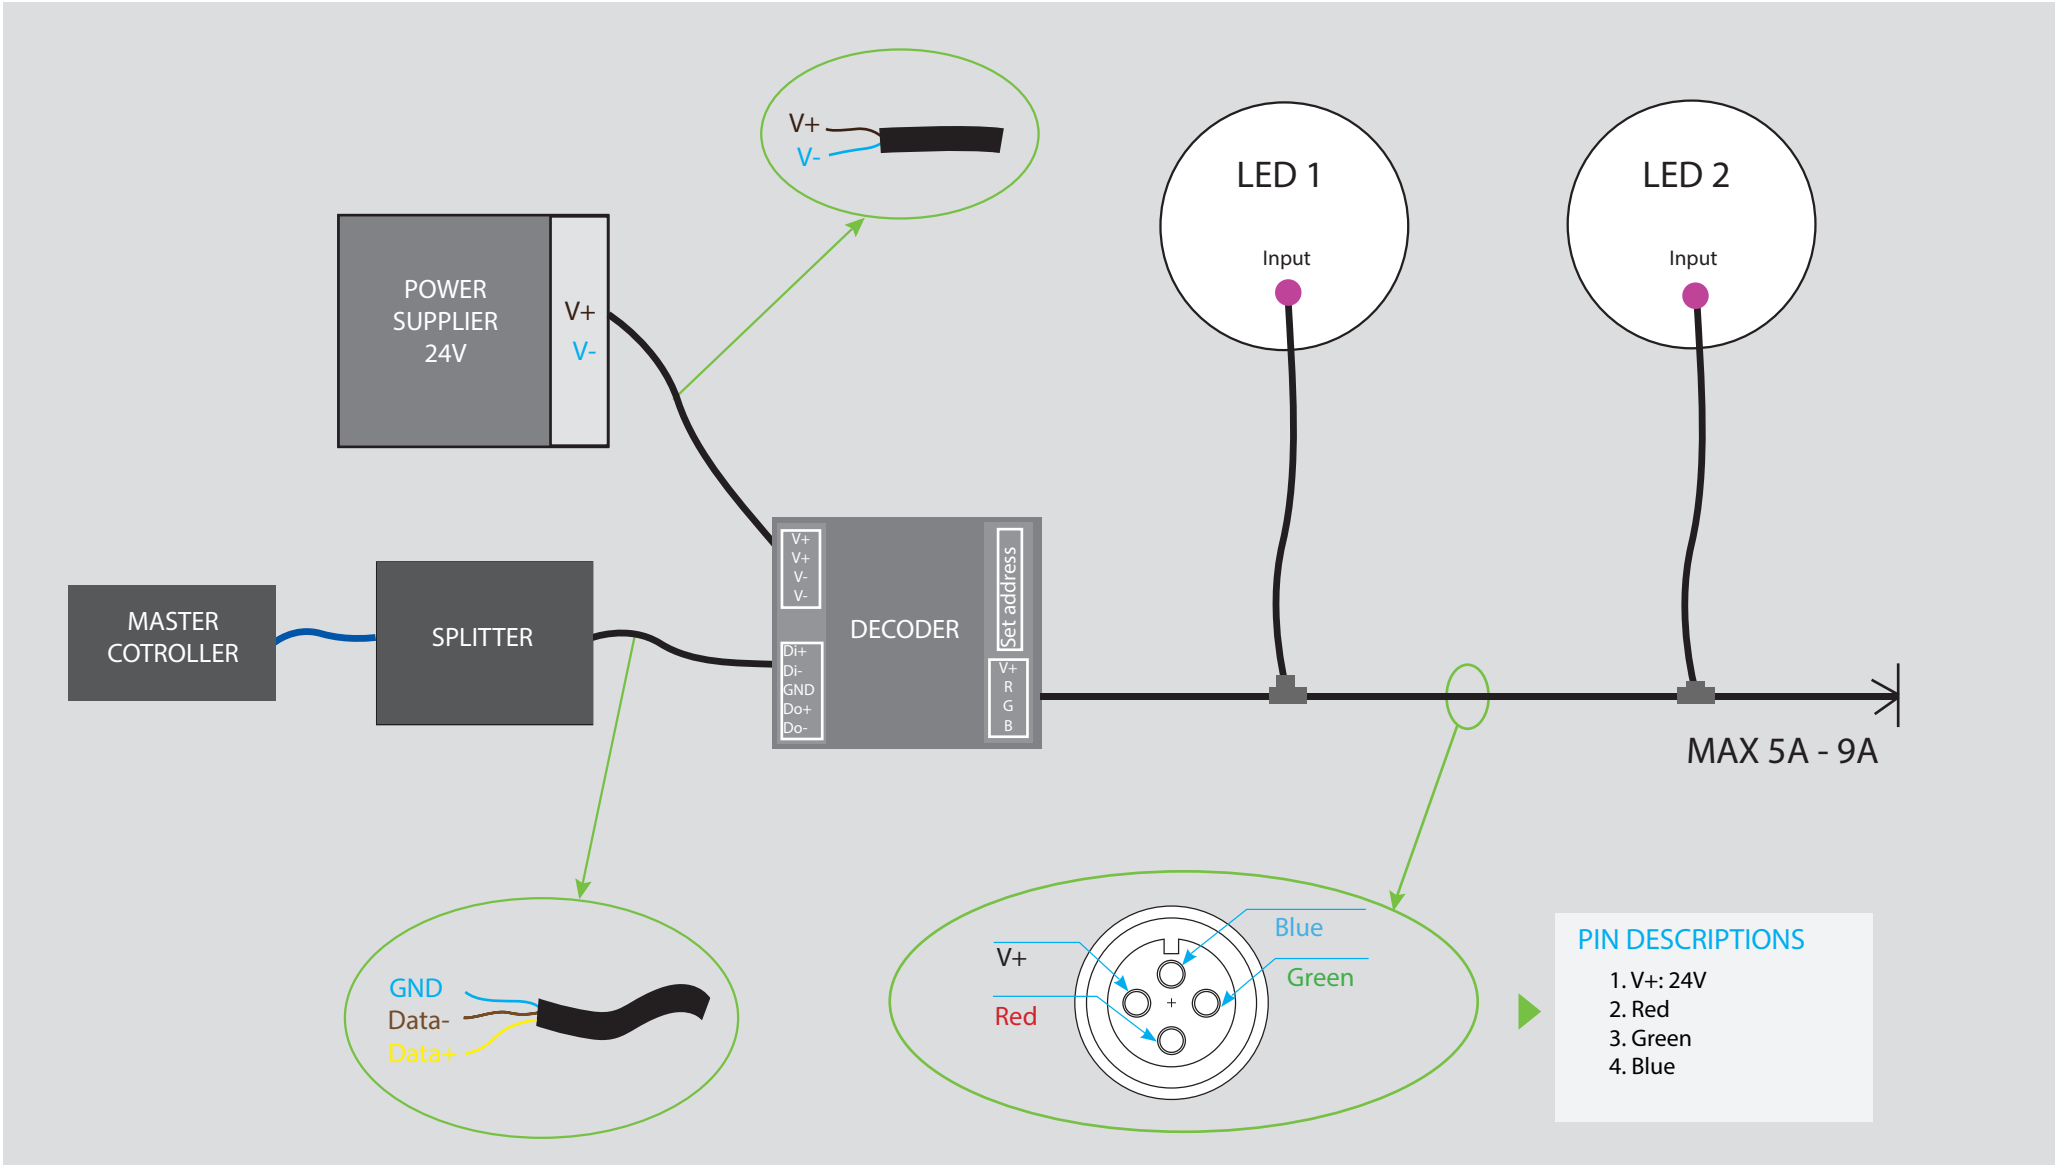

LED INGROUND LIGHT 6W

DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE

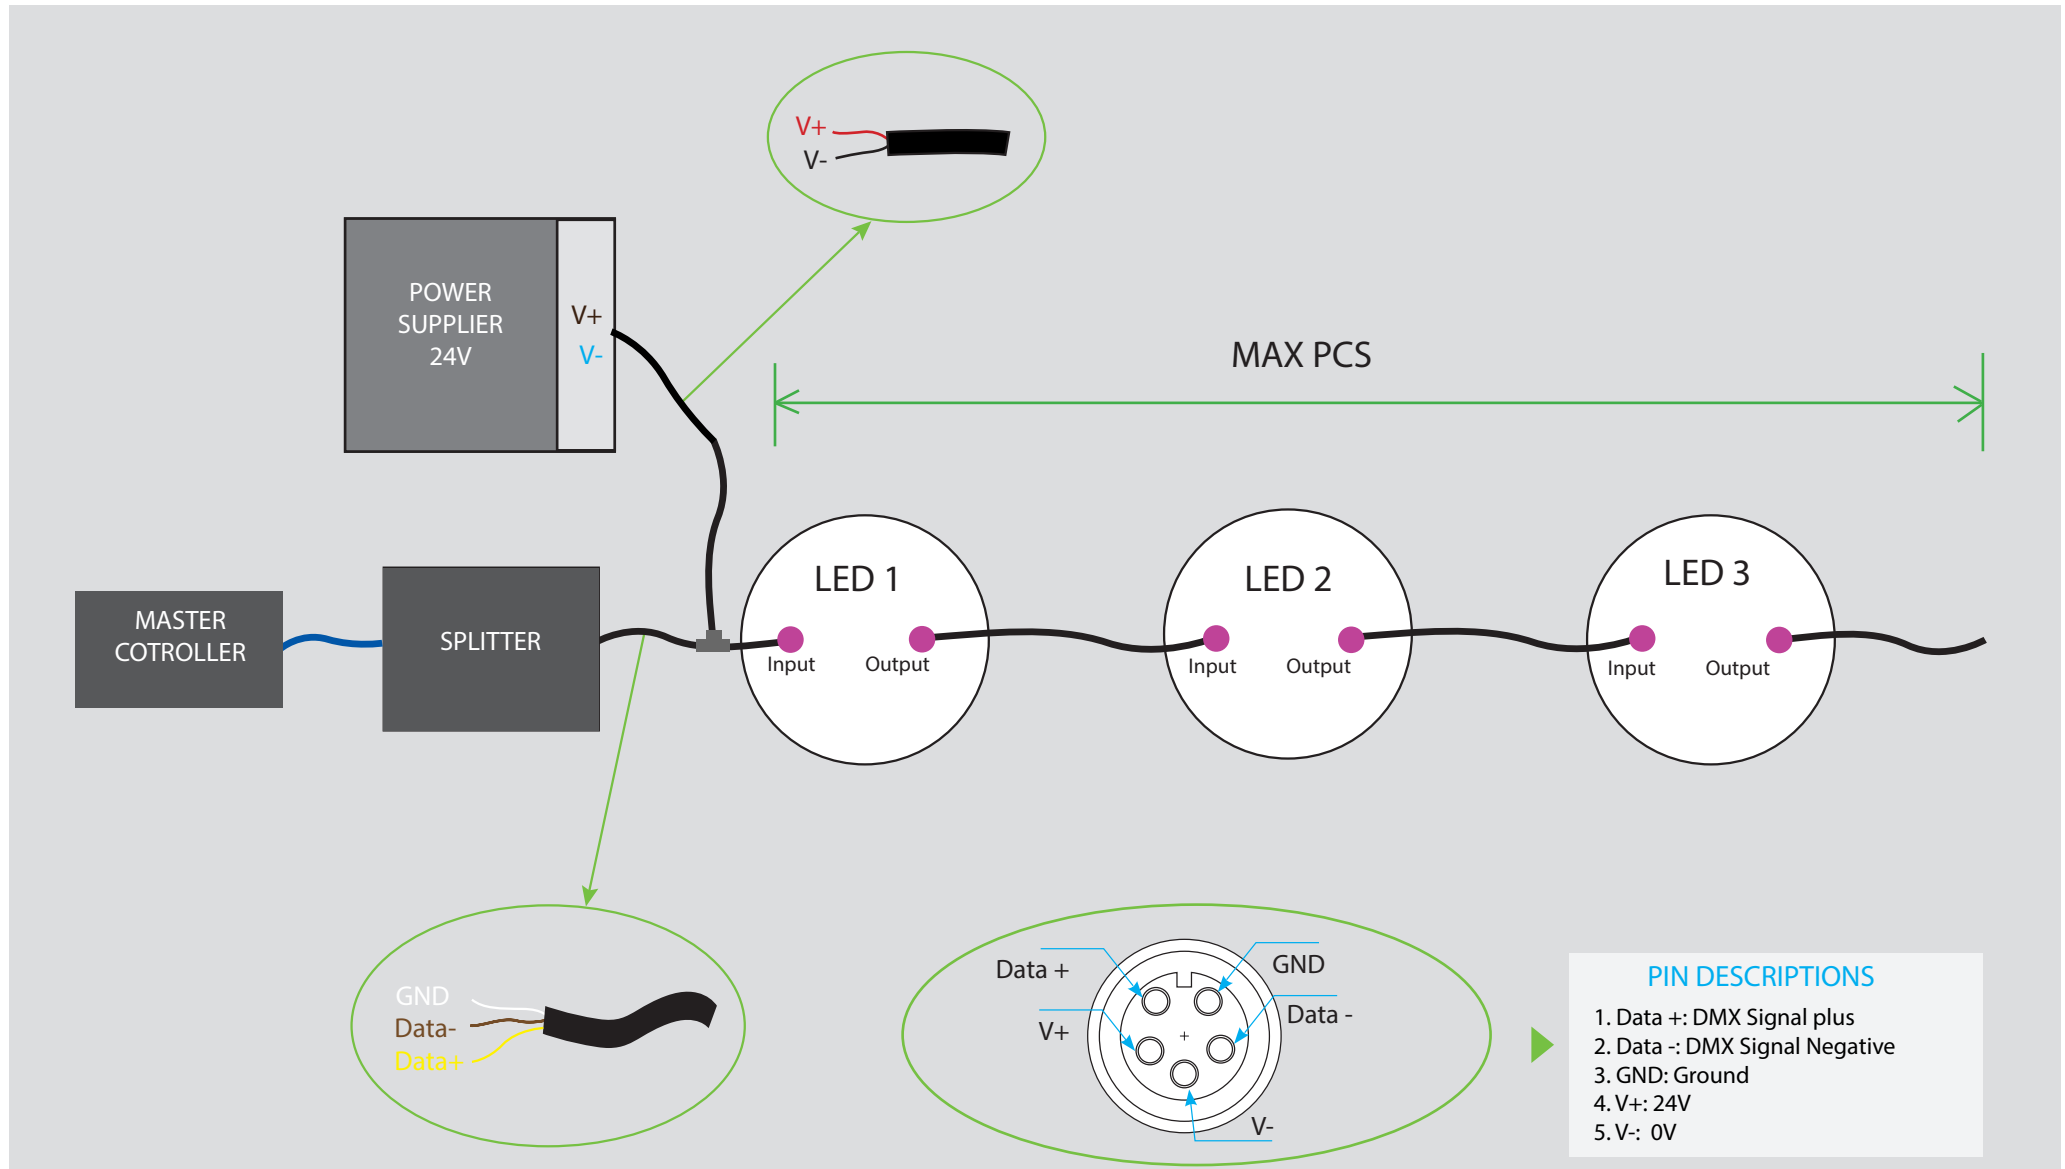

LED INGROUND LIGHT 6W - Applications

08



OUTDOOR



LANDSCAPE



HOTEL/RESTAURANT



FACADE BUILDING



LED INGROUND LIGHT 6W - Applications





THANKS FOR YOUR
ATTENTION