






LED LINEAR LIGHT 36W - SERIES B
PRODUCT OUTDOOR



LED LINEAR LIGHT 36W

SPECIFICATION

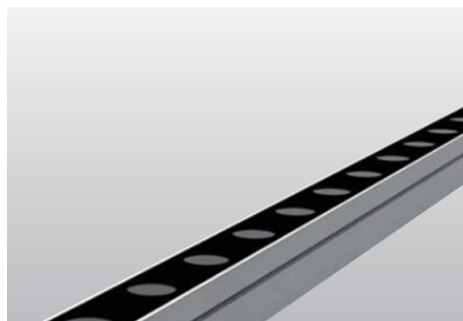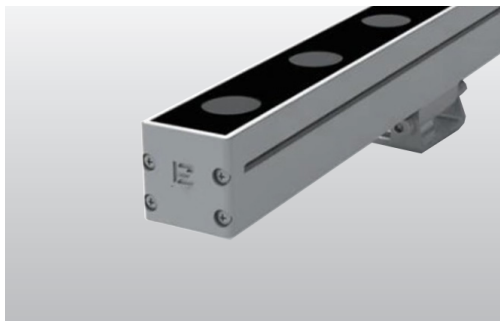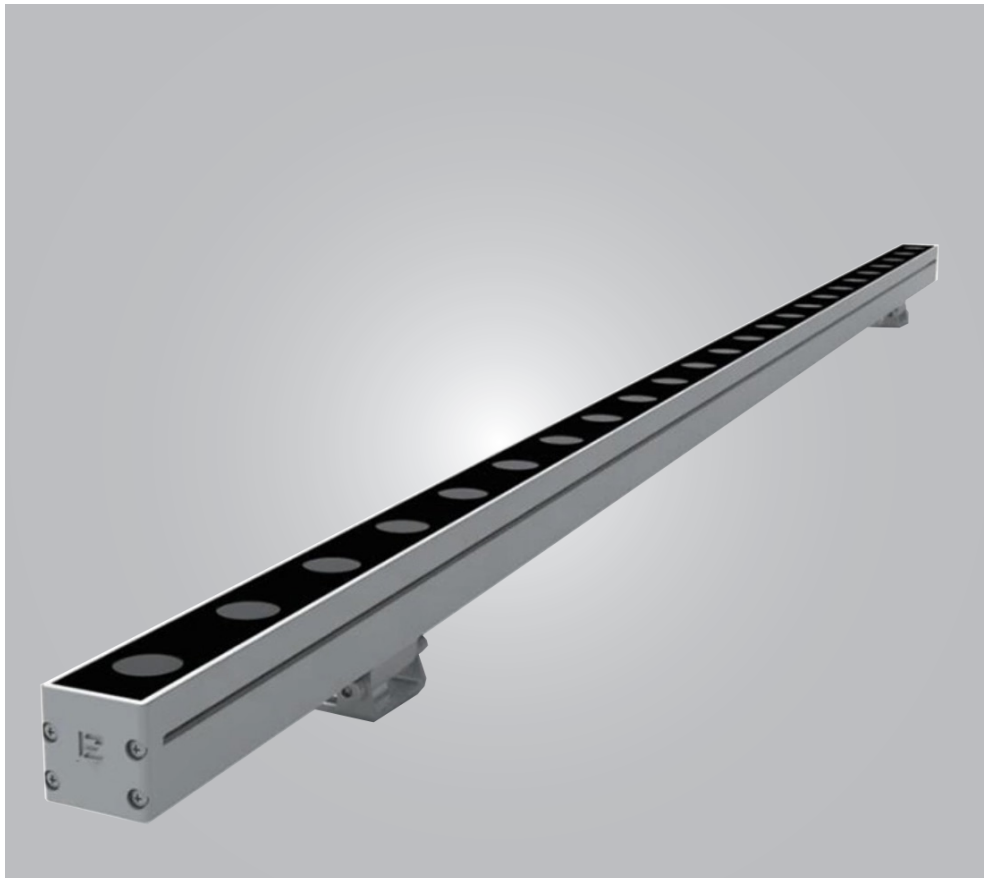

SPECIFICATION

- Order Code: LB036
- Input Voltage: 24Vdc, 220V
- Dimension: L1000xW41xH66 mm
- Chip Leds: CREE
- Power consumption: 36W
- Lumen Output: 3240 lm
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color[CRI]: 3000k, 4000k, 5000k, RGBW
- CRI: >80
- Beam angle:
 - + Len: 10°x20° (20°,40°, 50°,60°)
 - + Reflector: 12° 24° 36° 50°
- IP Rating: IP67
- Life time: 50.000 hour
- Control: ON/OFF, Dimmable, DMX512
- Standards:
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires




LED LINEAR LIGHT 36W

03

TECHNICAL DETAILS


TECHNICAL DETAILS

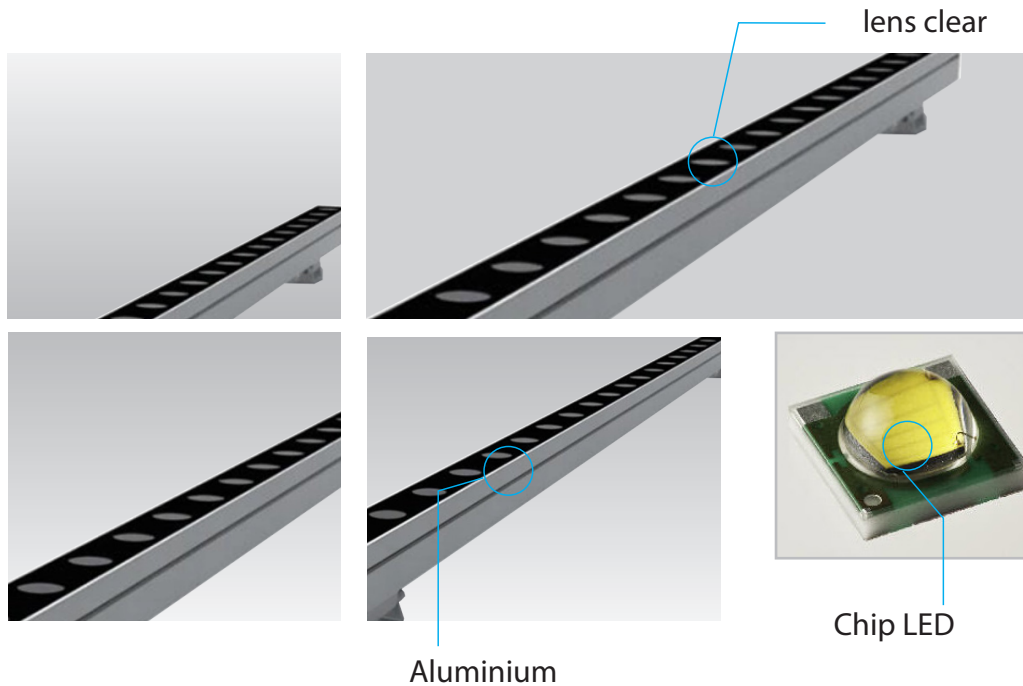



Lens Clear



Legace Reflector



DIMENSIONS

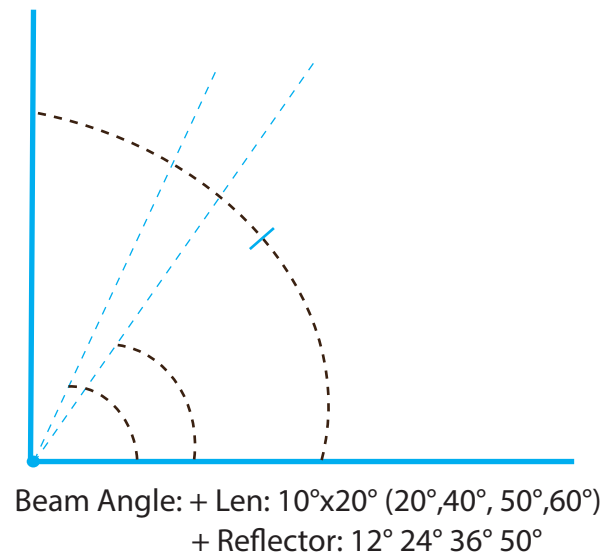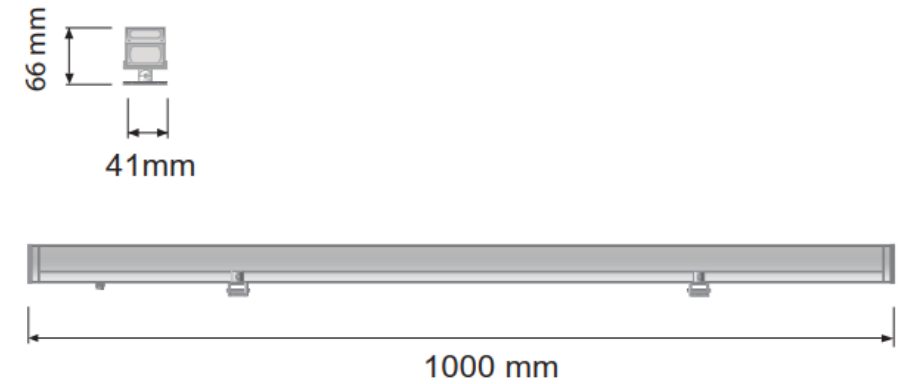


LED LINEAR LIGHT 36W

04


SPECIFICATION

36W 3000k


PHOTOMETRIC CURVE

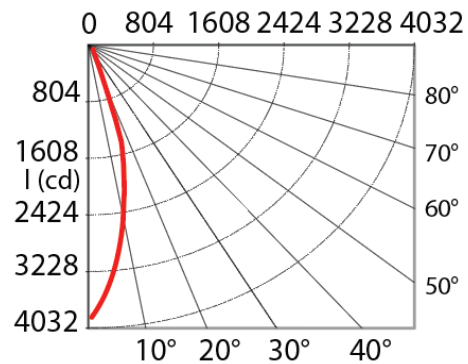


BEAM 36° AMPLITUDE DIAGRAM

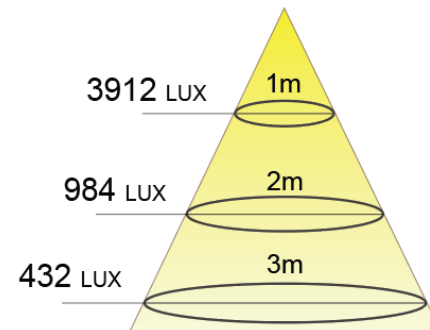

SPECIFICATION

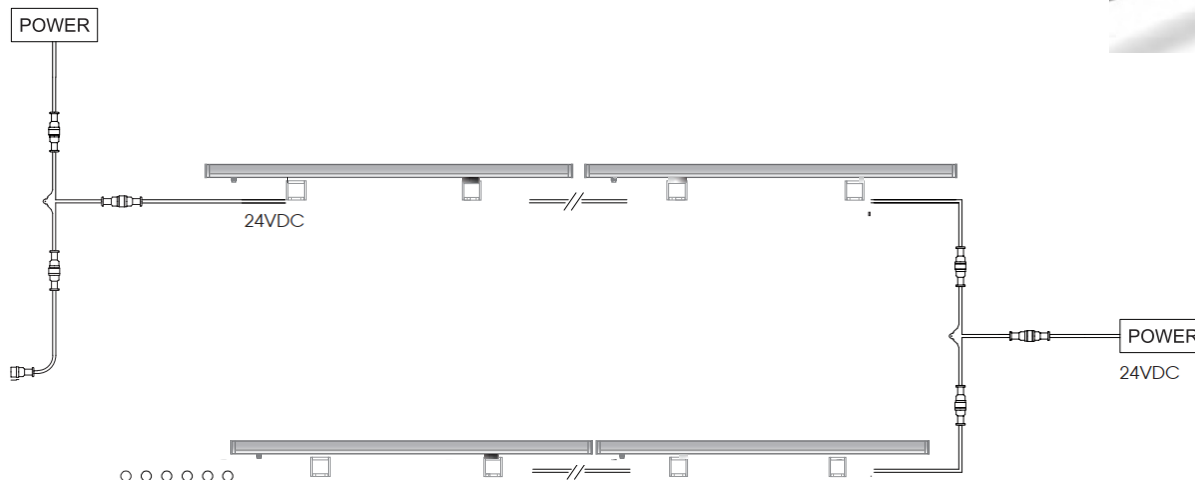


CONNECTOR IP68

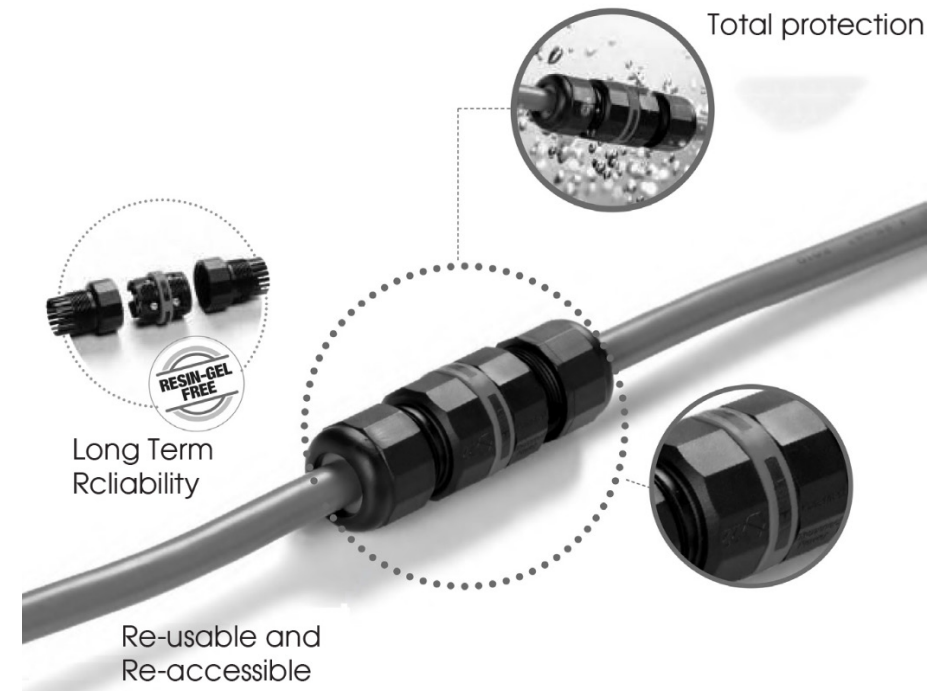

LED LINEAR LIGHT 36W

05


POWER SUPPLIES - INPUT VOTAGE

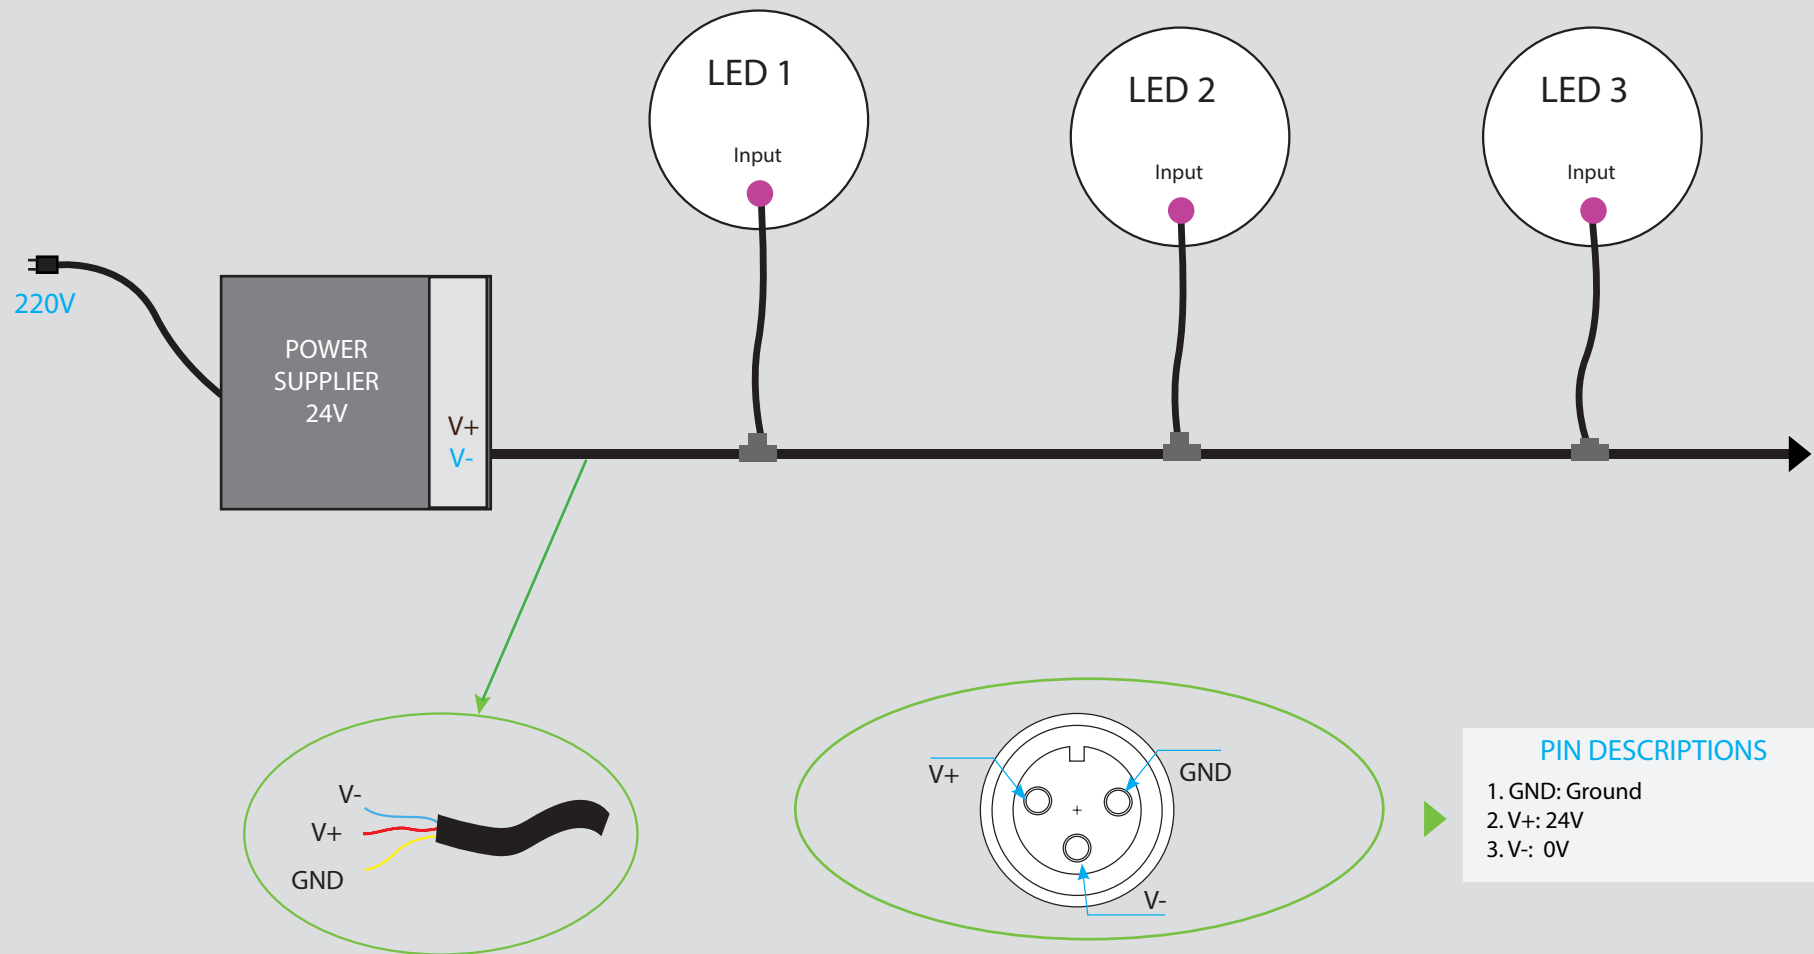

LED LINEAR LIGHT 36W

06


DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE & DECODER

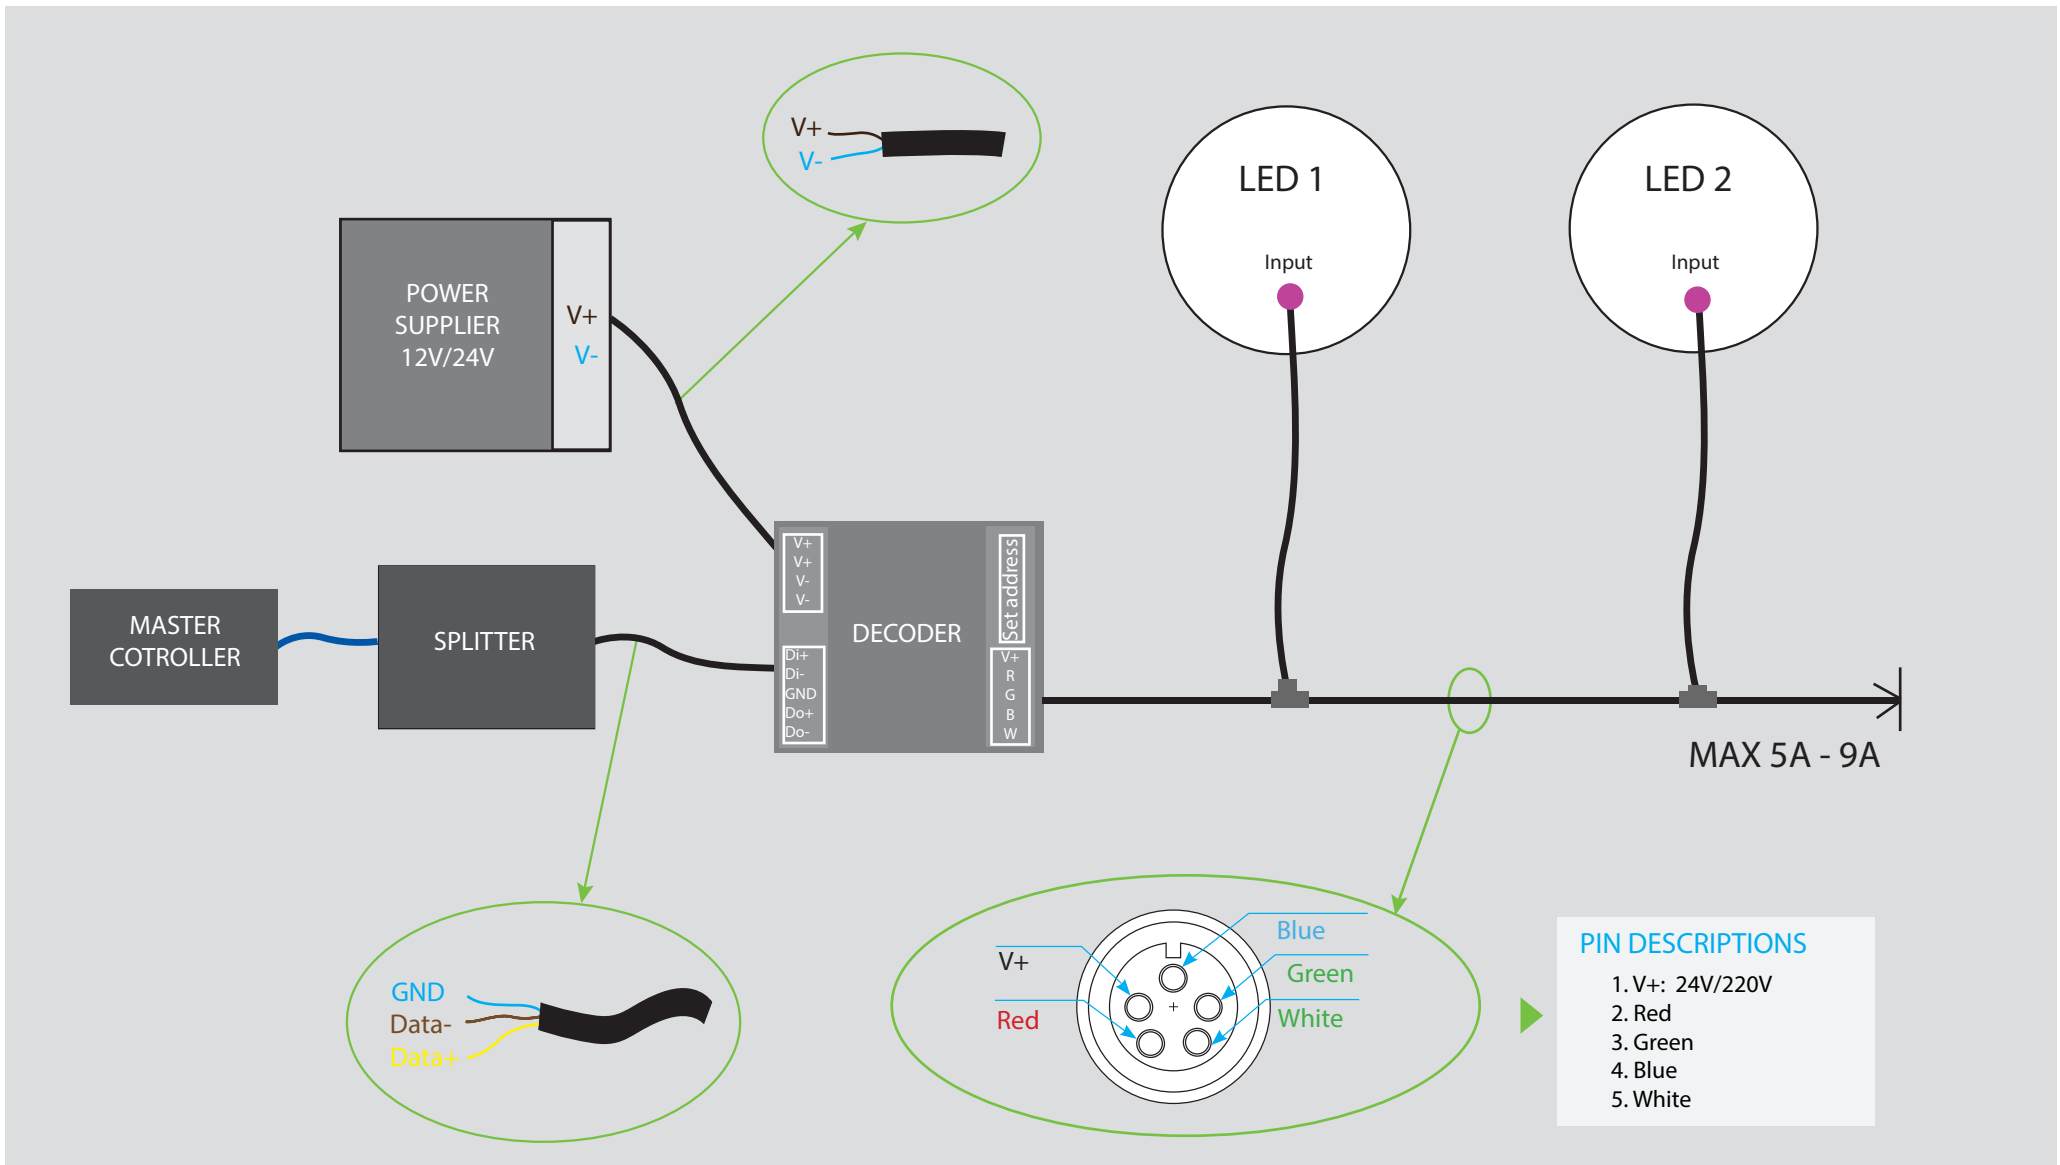

LED LINEAR LIGHT 36W

07

DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE

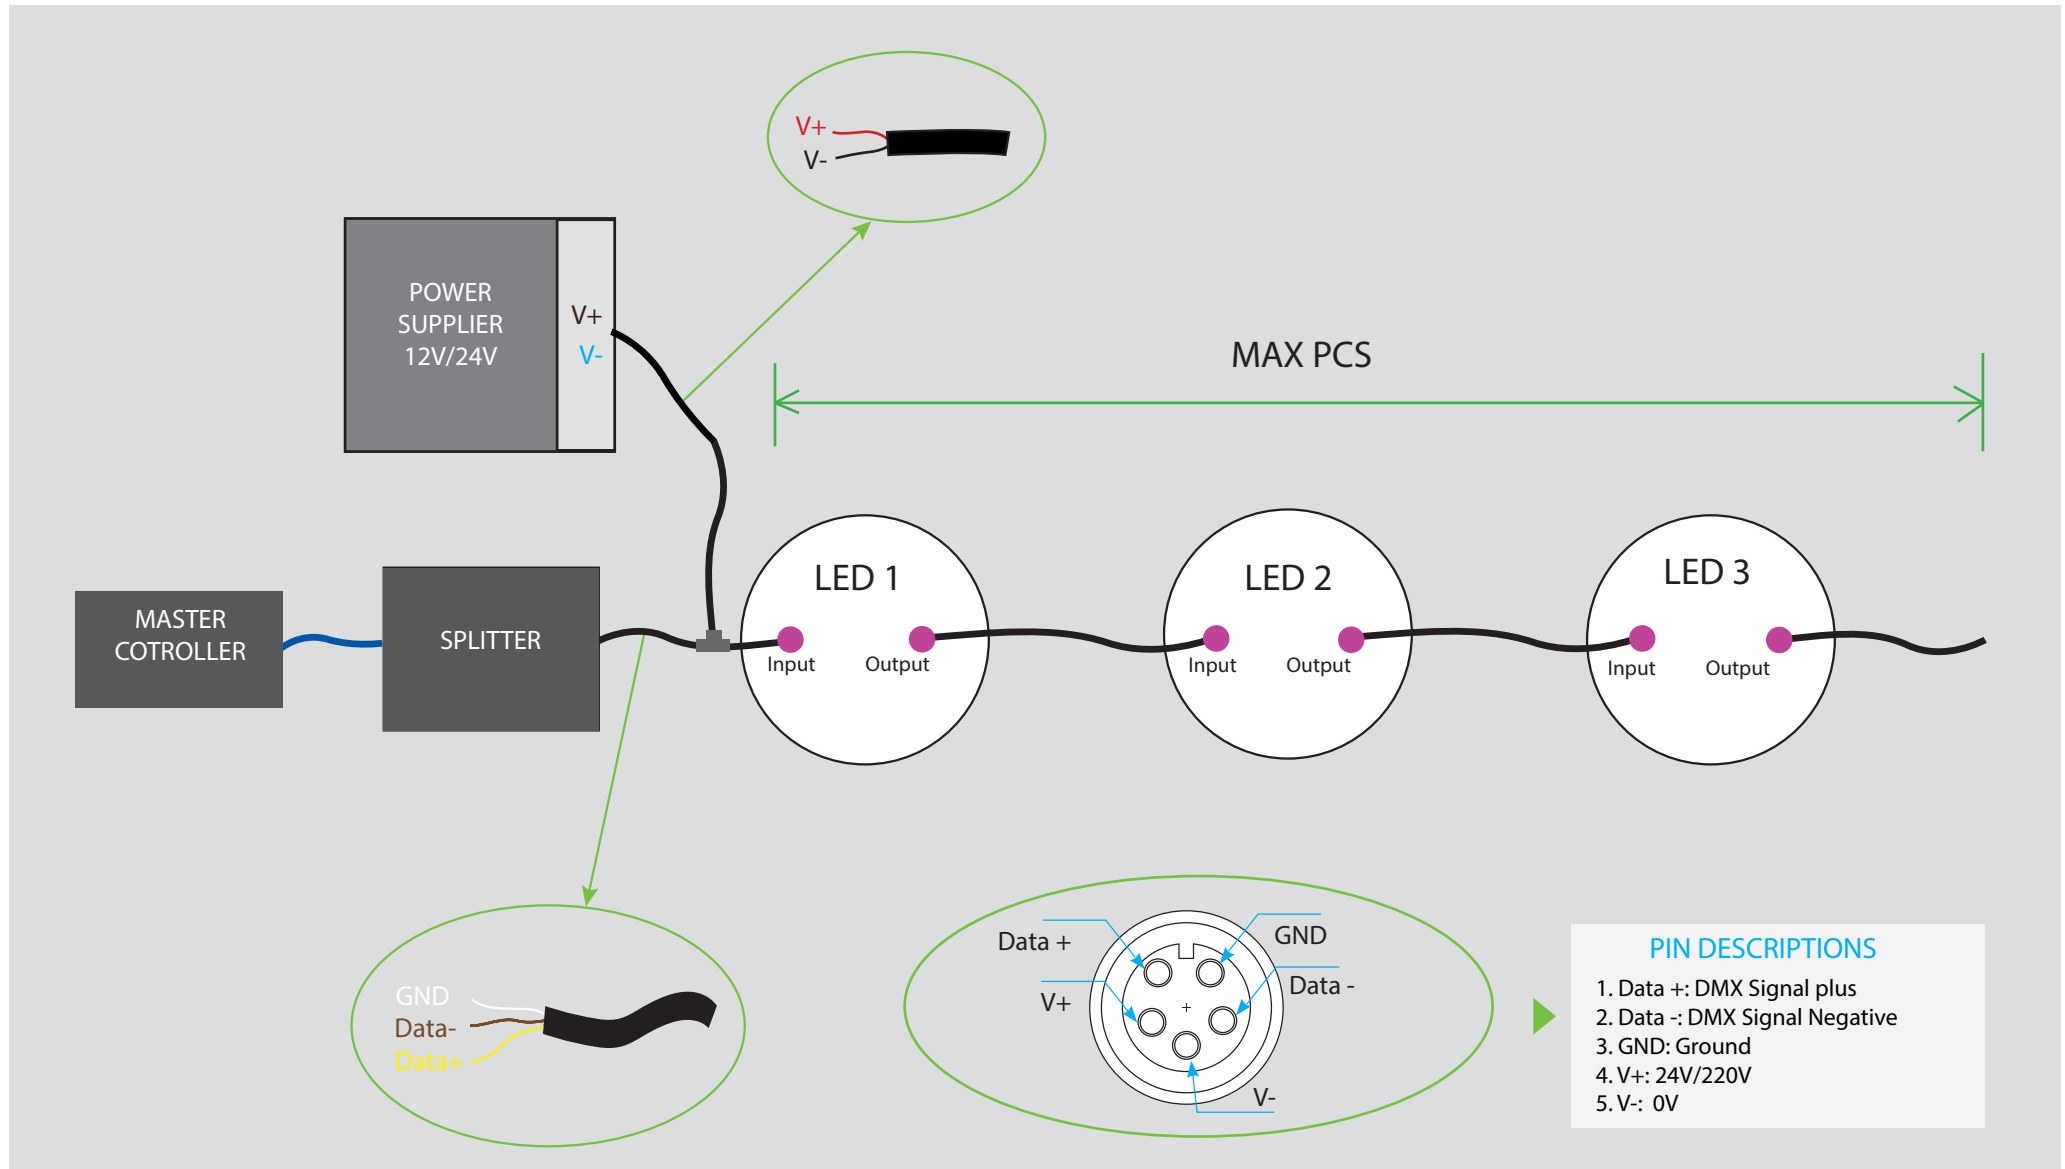

LED LINEAR LIGHT 36W - Applications

08



OUTDOOR



LANDSCAPE



HOTEL/RESTAURANT



FACADE BUILDING



LED LINEAR LIGHT 36W - Applications





THANKS FOR YOUR
ATTENTION