



LED SPOTLIGHT 9W - SERIES A
PRODUCT OUTDOOR



ASLED LIGHT CO.,LTD

LED SPOTLIGHT 9W

SPECCIFICATION



SPECCIFICATION

02


- Order Code: SA009
- Input Voltage: 24VDC, 220VAC
- Dimension: Ø54xL120xH82 mm
- Chip LED: CREE
- Power consumption: 9W
- Luminous Flux: 810lm at 3000K, 9W, CRI>90, 36°
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color: 3000K, 4000K, 5000K
- CRI: 90
- Beam angle: 12° 24° 36° 50°
- IP Rating: IP68
- Life time: 50.000 hours
- Control: ON/OFF, DIM 0 - 10V, DALI, DMX512
- Standards:
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires



LED SPOTLIGHT 9W

TECHNICAL DETAILS



TECHNICAL DETAILS

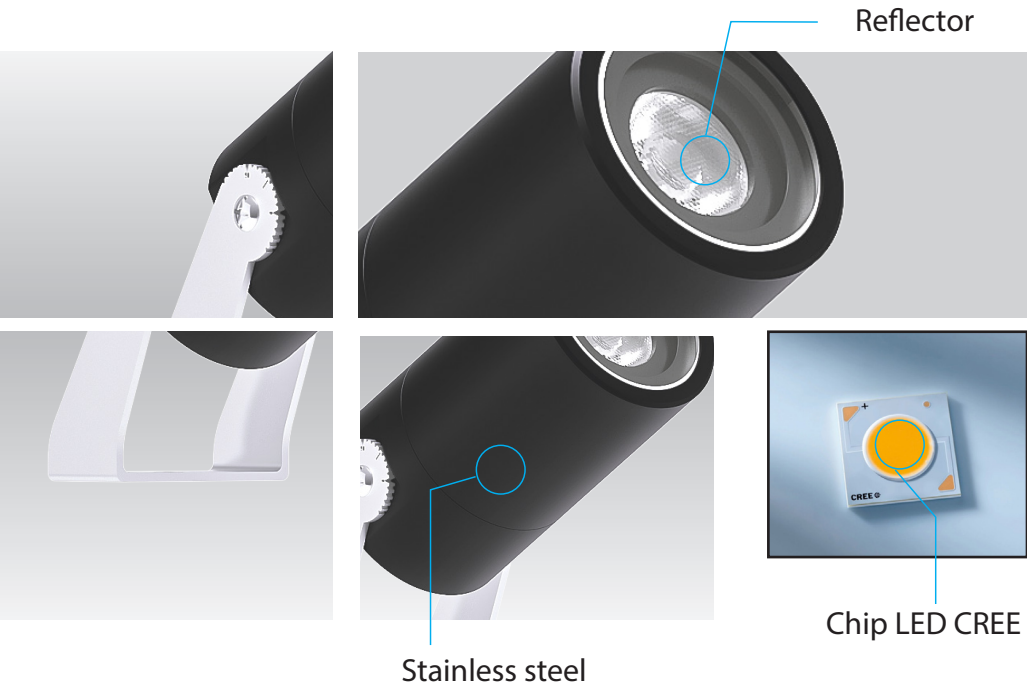



Legace

Select Color XX

Lens Clear

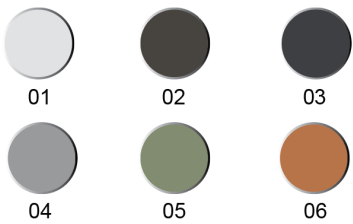

DIMENSIONS

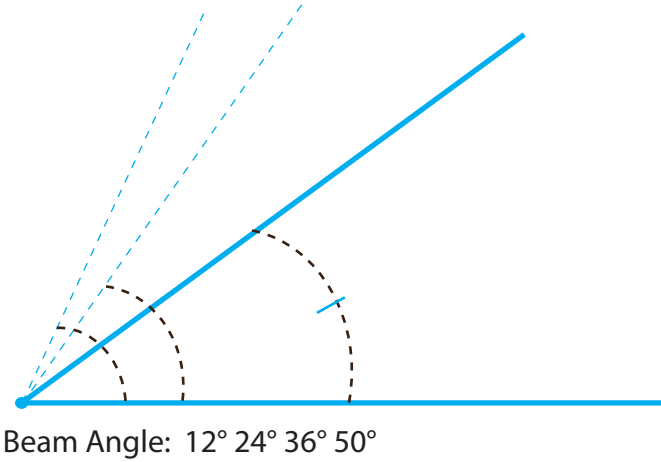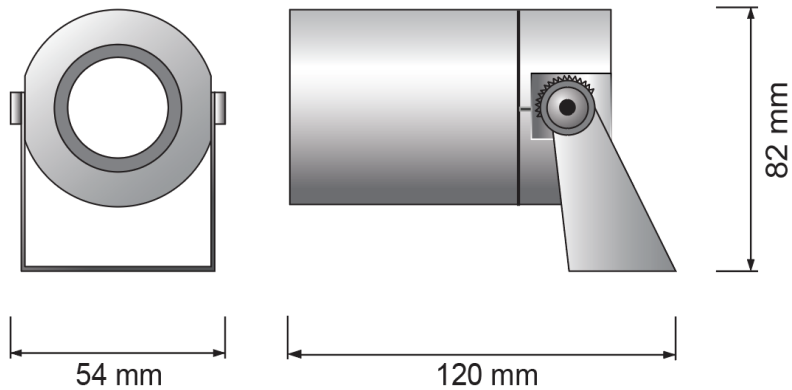


LED SPOTLIGHT 9W




04

SPECIFICATION

PHOTOMETRIC CURVE

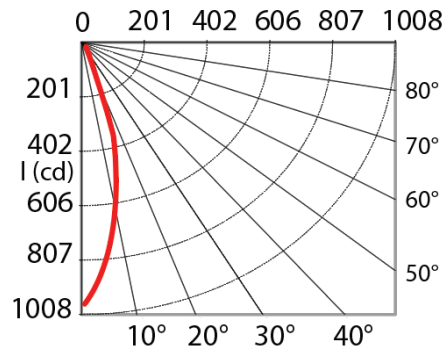


BEAM 36° AMPLITUDE DIAGRAM

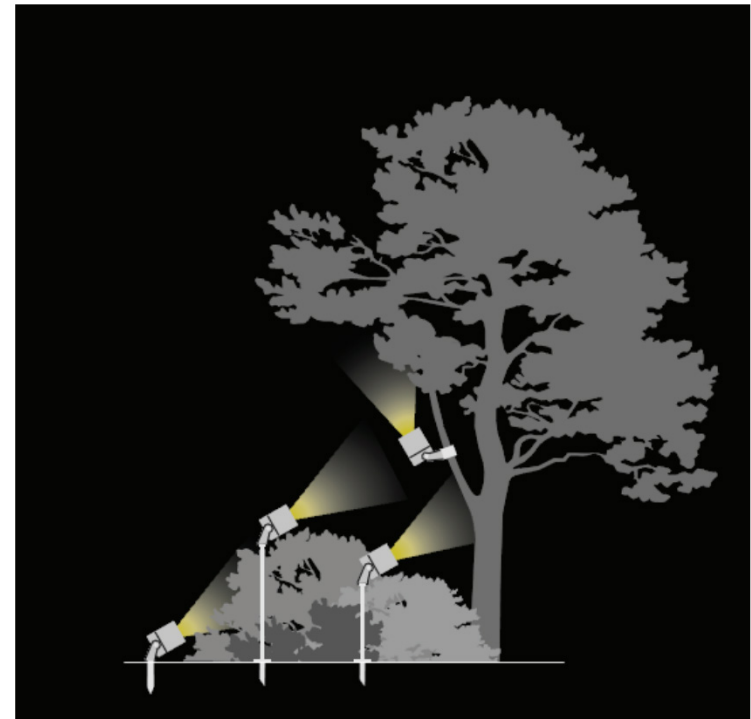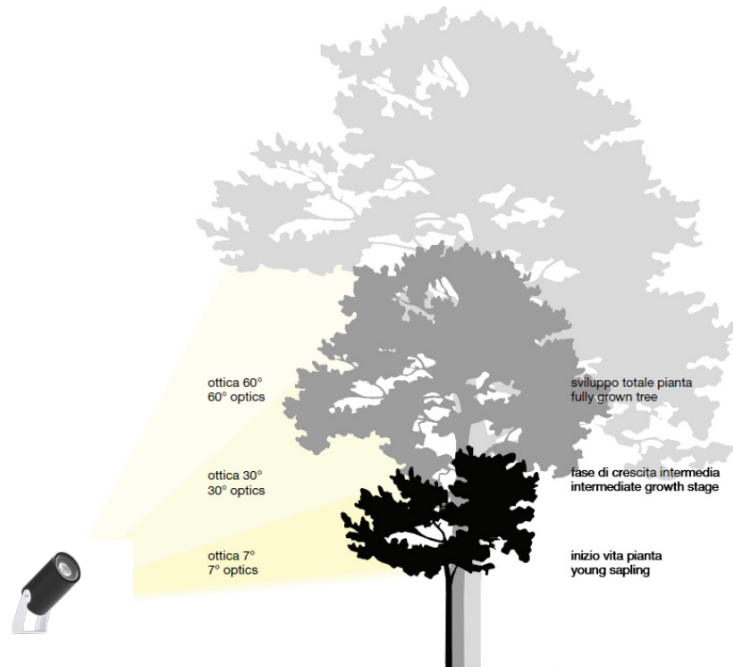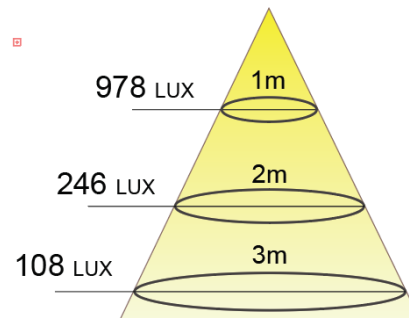

LED SPOTLIGHT 9W


05


POWER SUPPLIES - INPUT VOTAGE

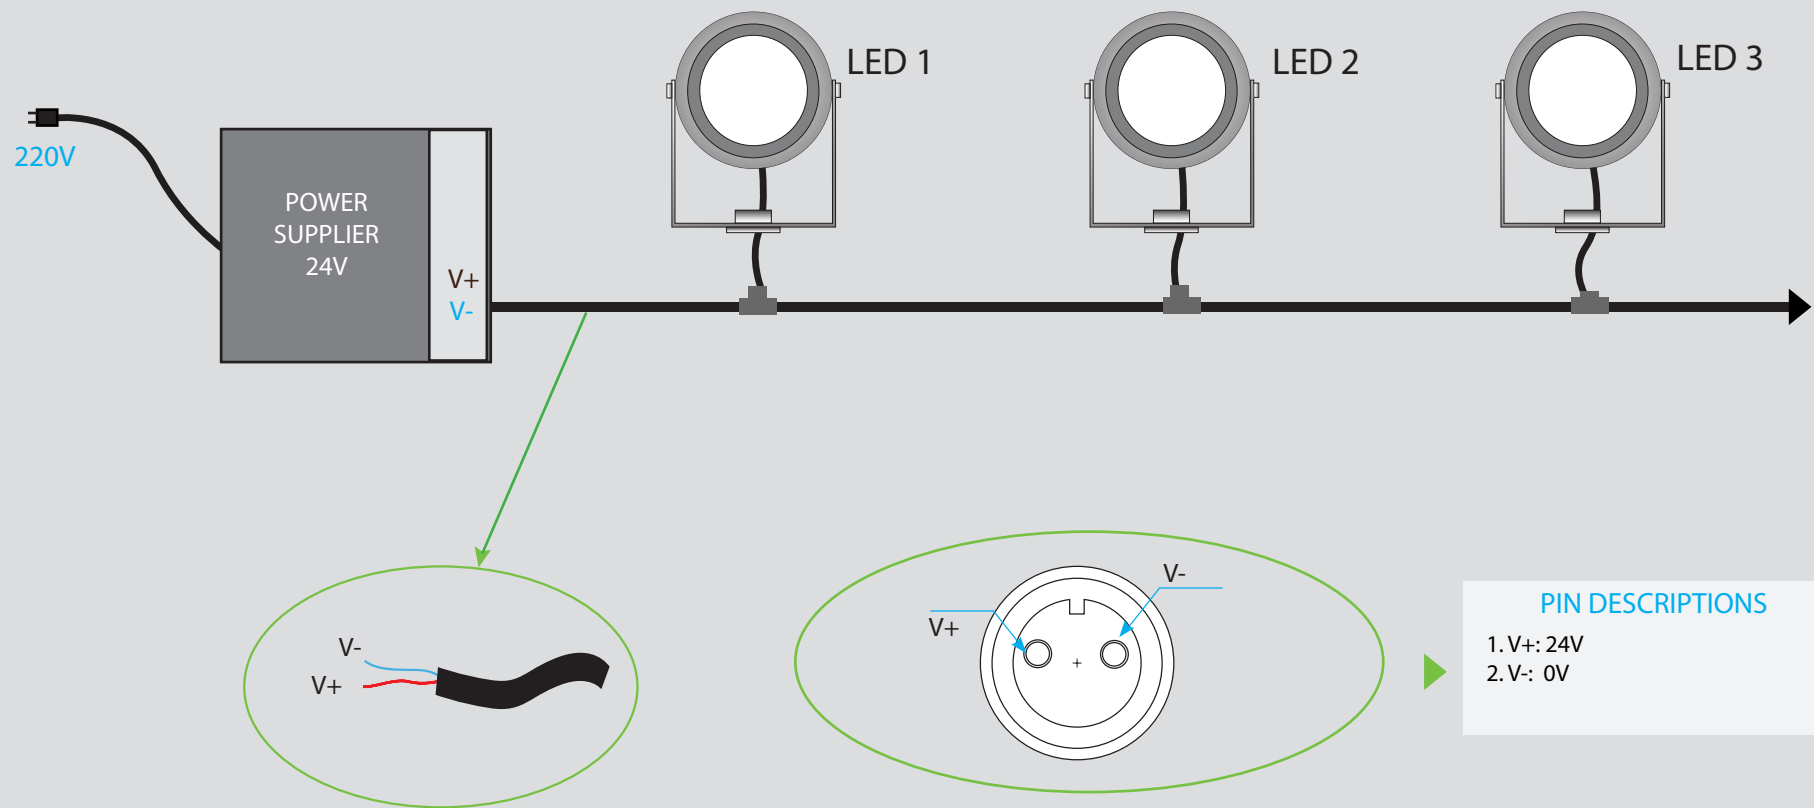

LED SPOTLIGHT 9W

DIAGRAM CONNECTOR - DMX PROTOCOL - 4 CORE & DECODER

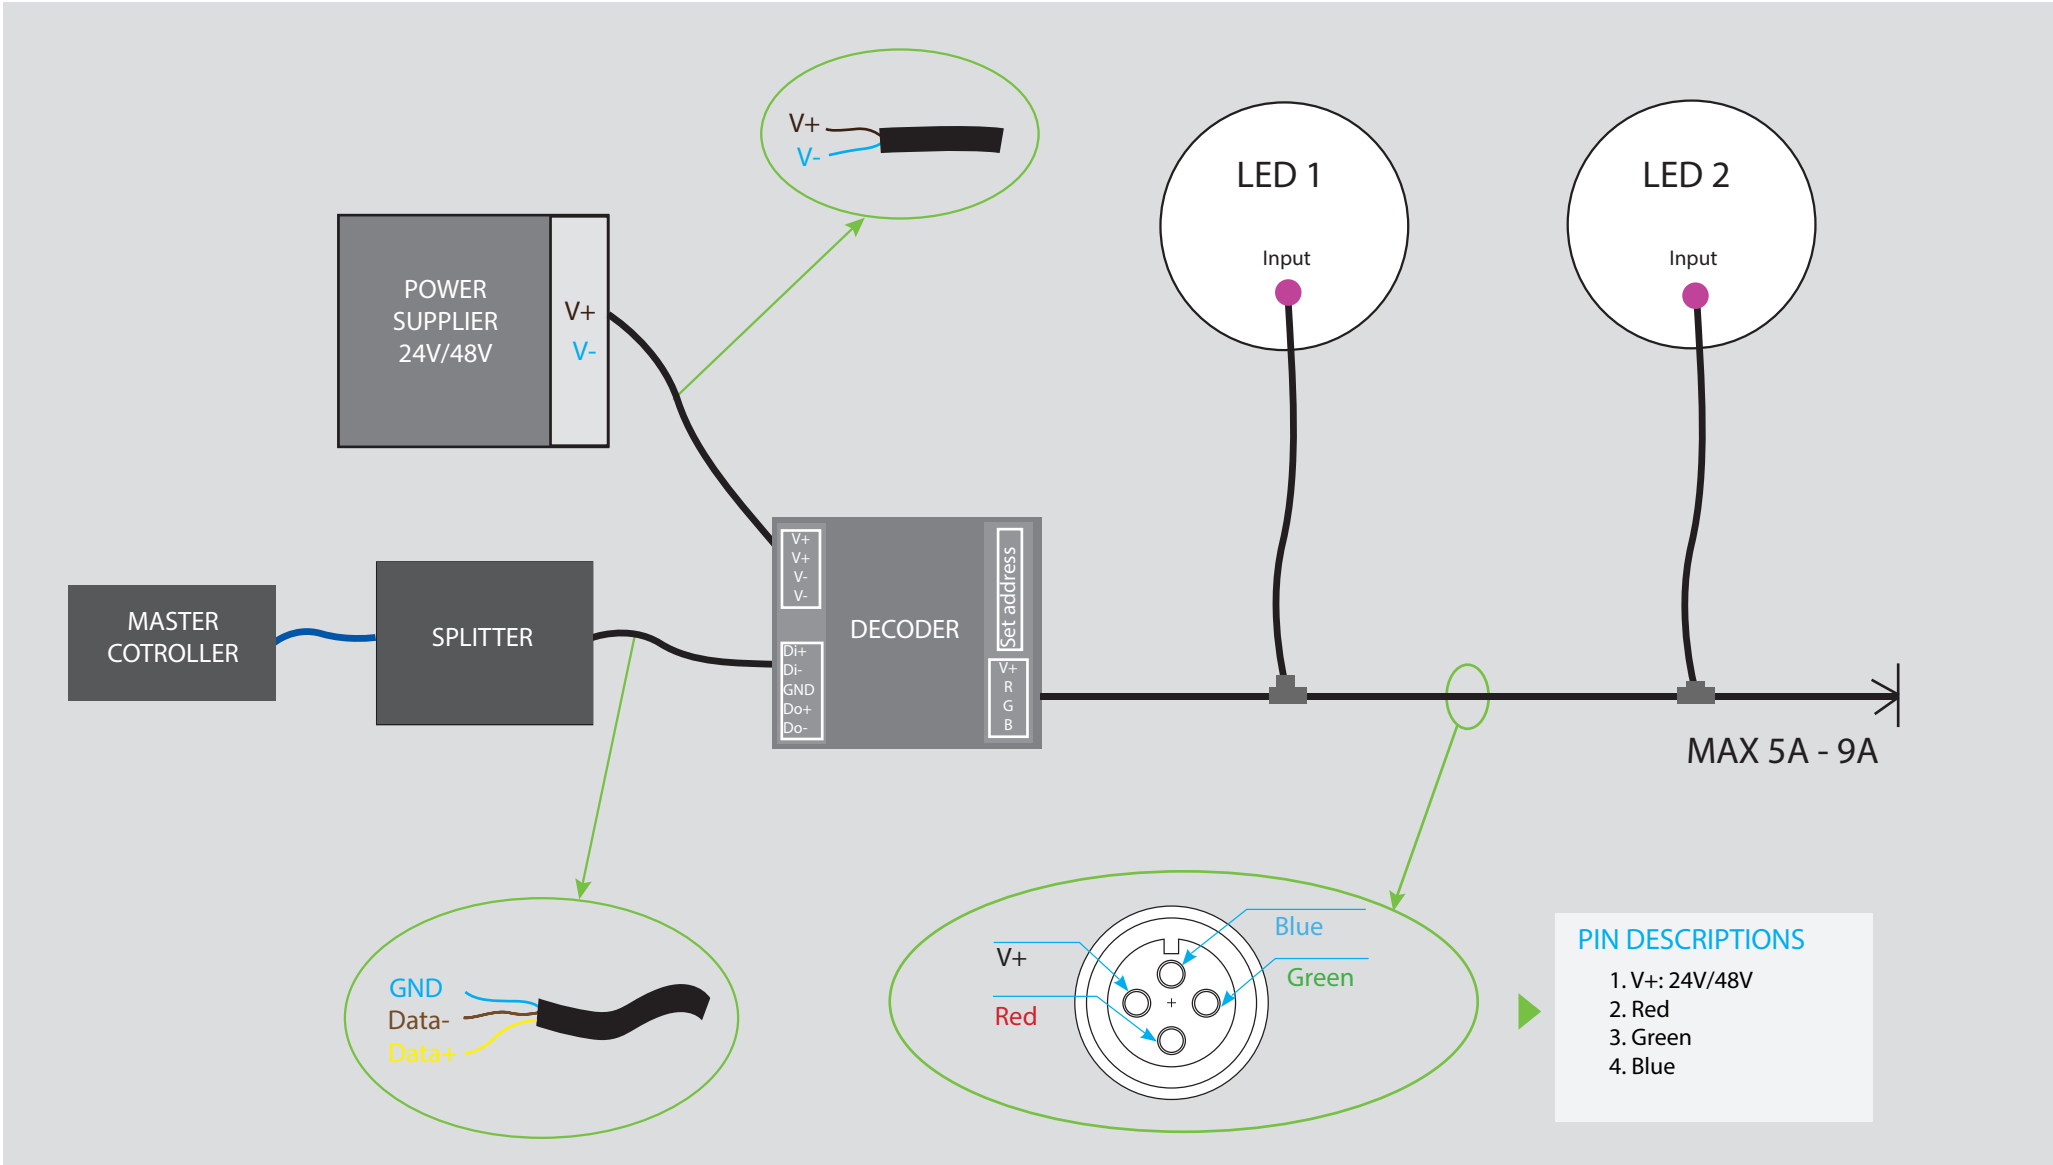



OUTDOOR



LANDSCAPE



HOTEL/RESTAURANT



FACADE BUILDING



LED SPOTLIGHT 9W - Applications

08





THANKS FOR YOUR
ATTENTION