LED INGROUND LIGHT 9W - SERIES B

PRDUCT OUTDOOR

ASLED

LED INGROUND LIGHT 9W

SPECCIFICATION

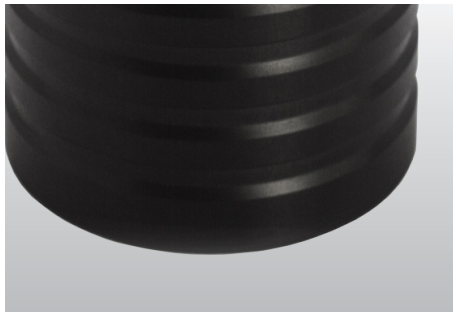

SPECCIFICATION

- Order Code: IB009
- Input Voltage: 24VDC, 220V
- Dimension: Ø100xH125 Cutout Ø60mm
- Chip LED: CREE
- Power consumption: 3x3W
- Lumen Output: 3x270 lm
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color[CRI]: 3000K, 4000k, 5000k, RGBW
- CRI: >90
- Beam angle: 12° 24° 36° 50°
- IP Rating: IP68
- Life time: 50.000 hour
- Control: ON/OFF, DIM 0 - 10V, DALI, DMX512
- Standards:
  + RoHS; EMC protection
  + IEC 62031LED
  + IEC 60598 Luminaires

IP68

LED INGROUND LIGHT 9W

TECHNICAL DETAILS

TECHNICAL DETAILS

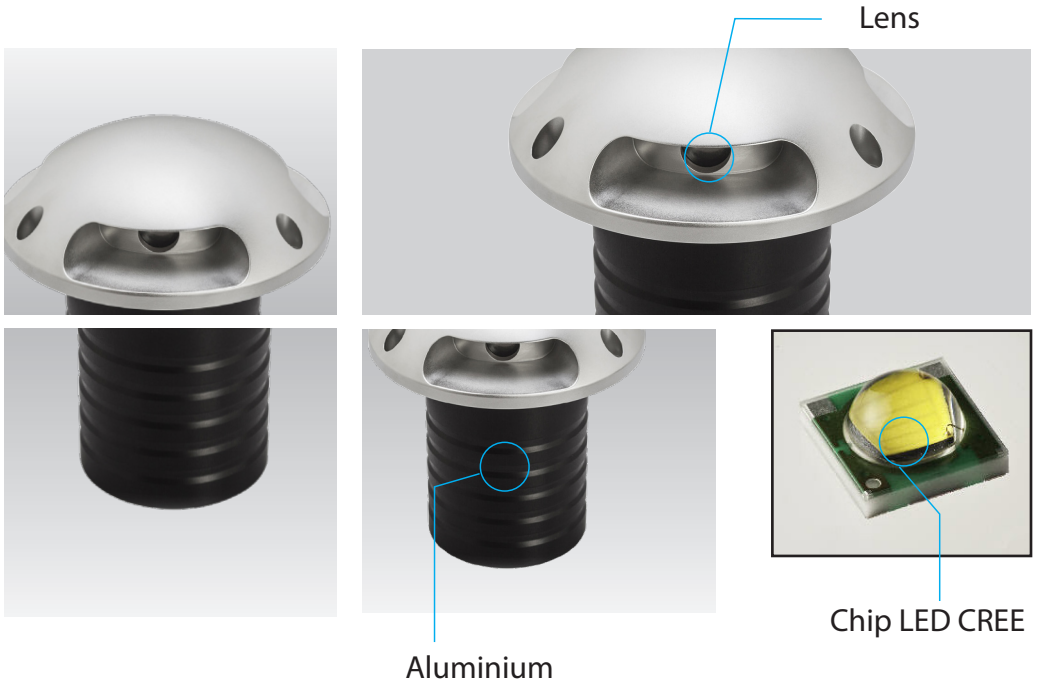

BEAM ANGLE

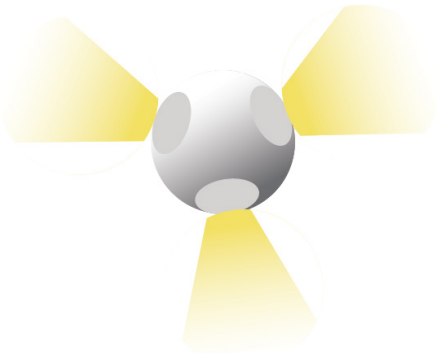

DIMENSIONS

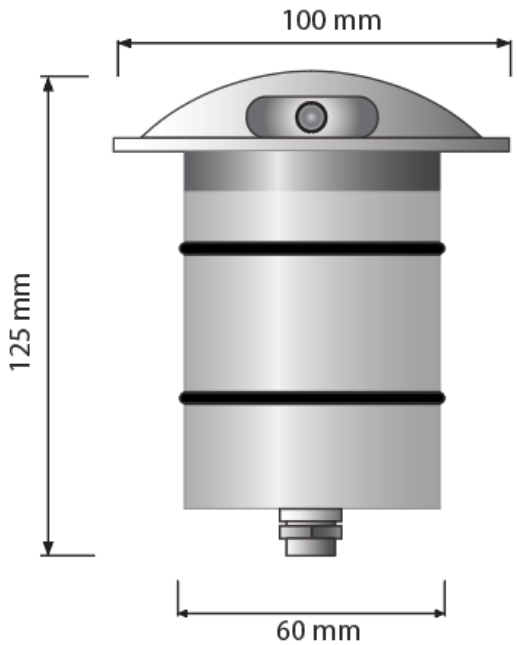

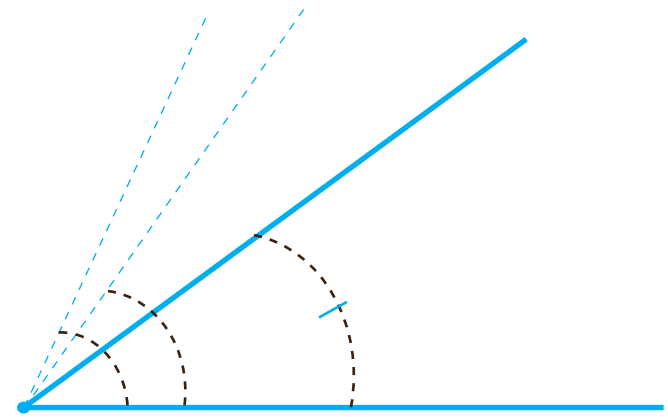

Beam Angle: 45°

LED INGROUND LIGHT 9W

SPECIFICATION

PHOTOMETRIC CURVE

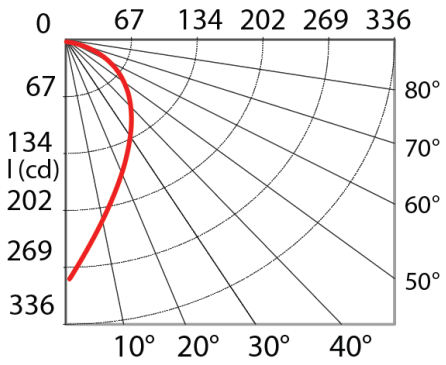

BEAM 45° AMPLITUDE DIAGRAM

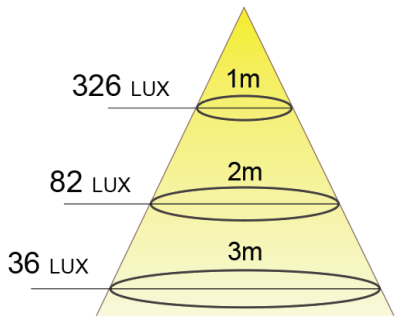

INSTALLATION

Option 1

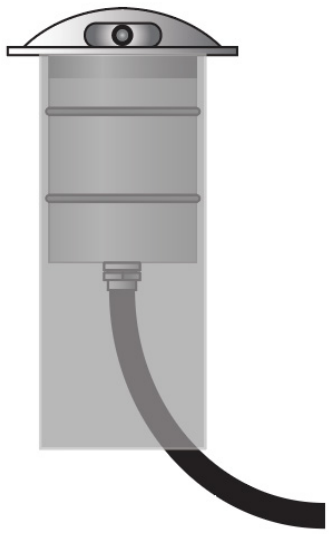

Input
Votage

Option 2

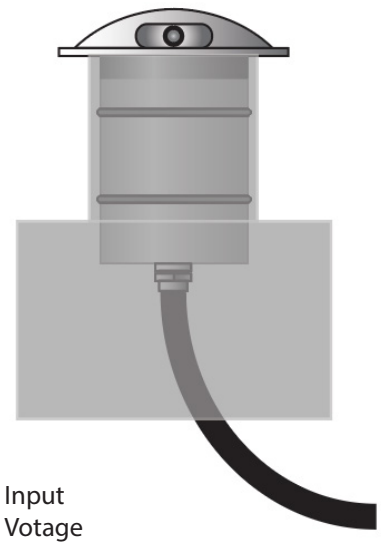

Input
Votage

CONNECTOR IP68

LED INGROUND LIGHT 9W

POWER SUPPLIES - INPUT VOTAGE

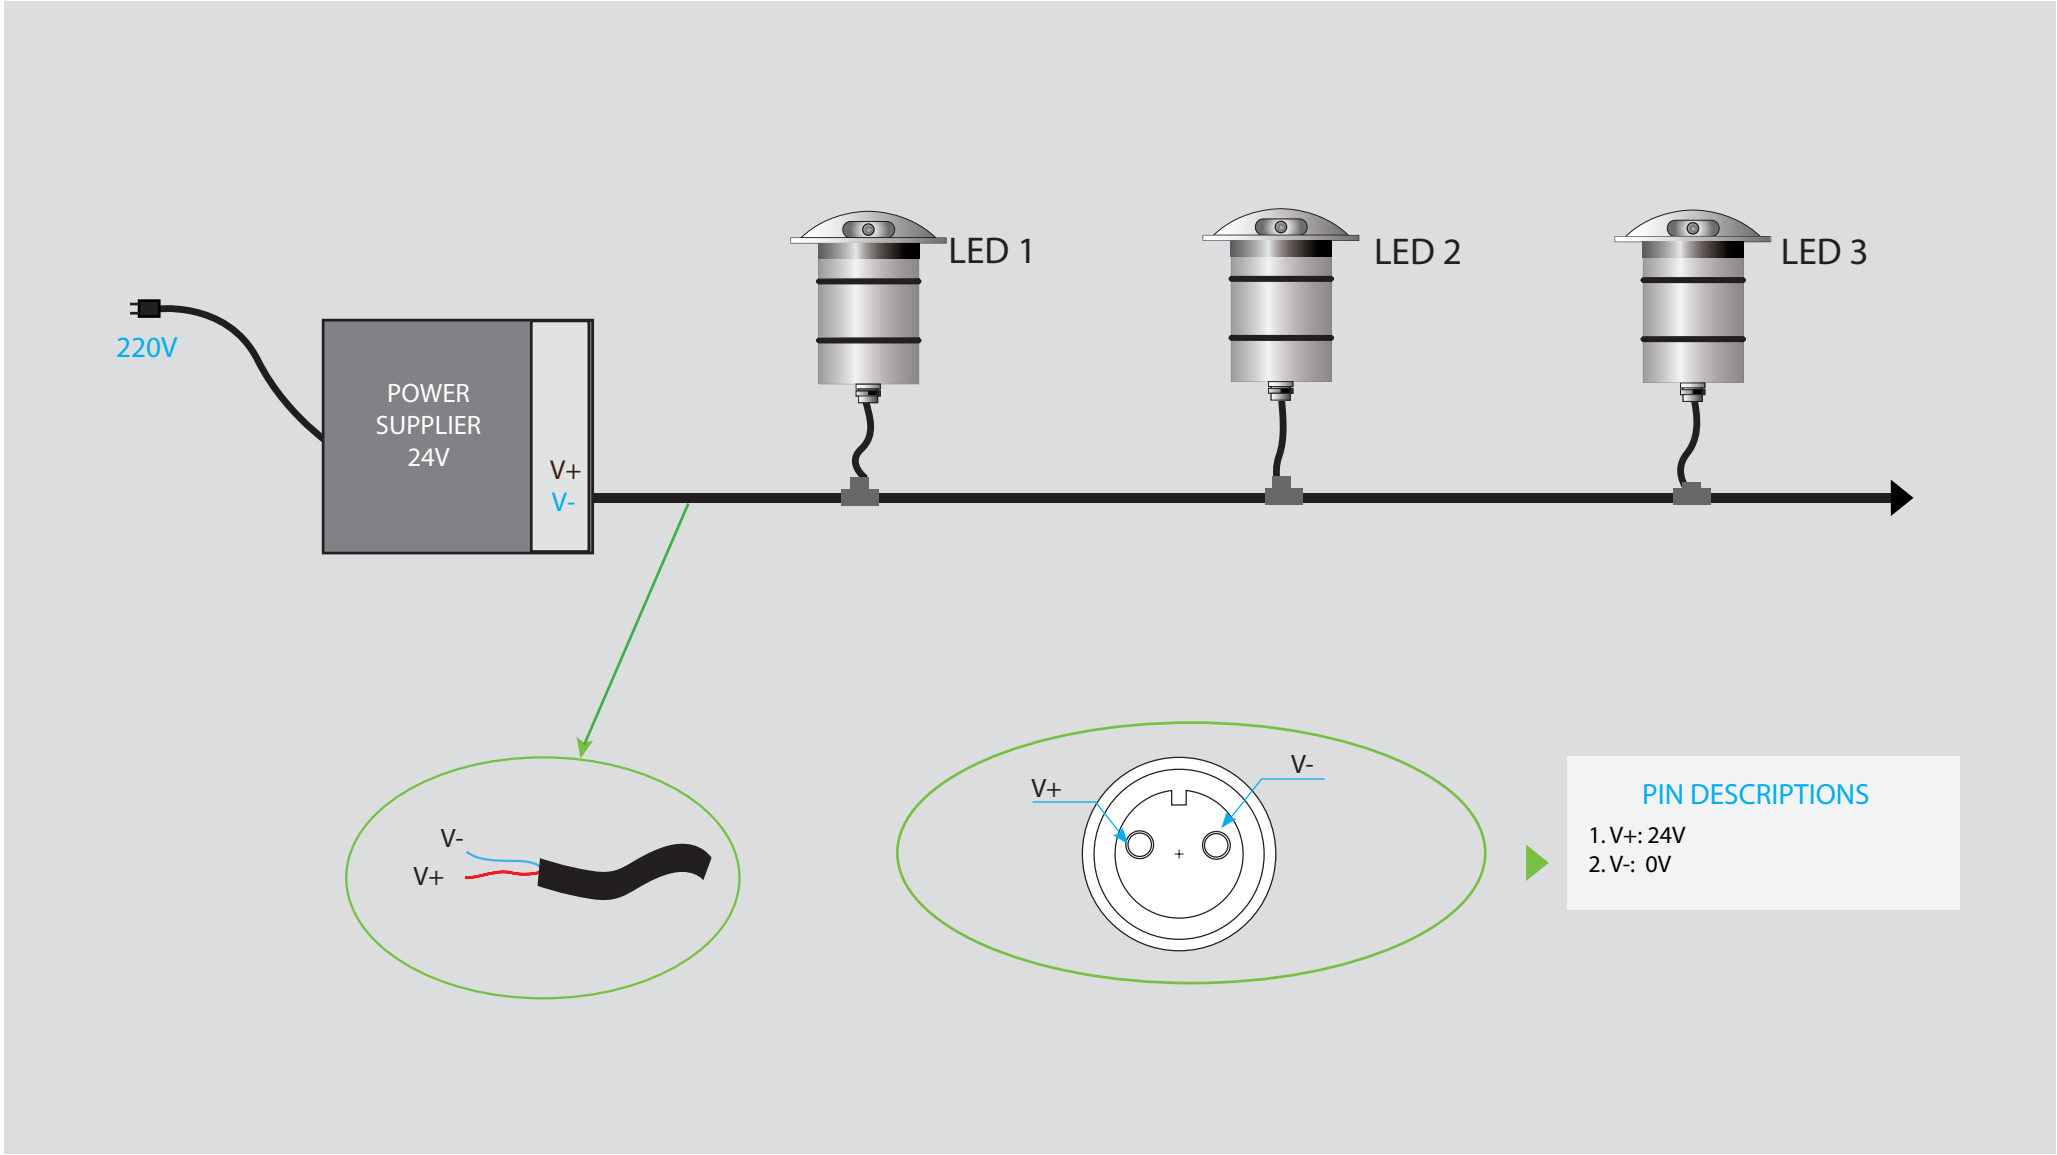

LED INGROUND LIGHT 9W

DIAGRAM CONNECTOR - DMX PROTOCOL - 4 CORE & DECODER

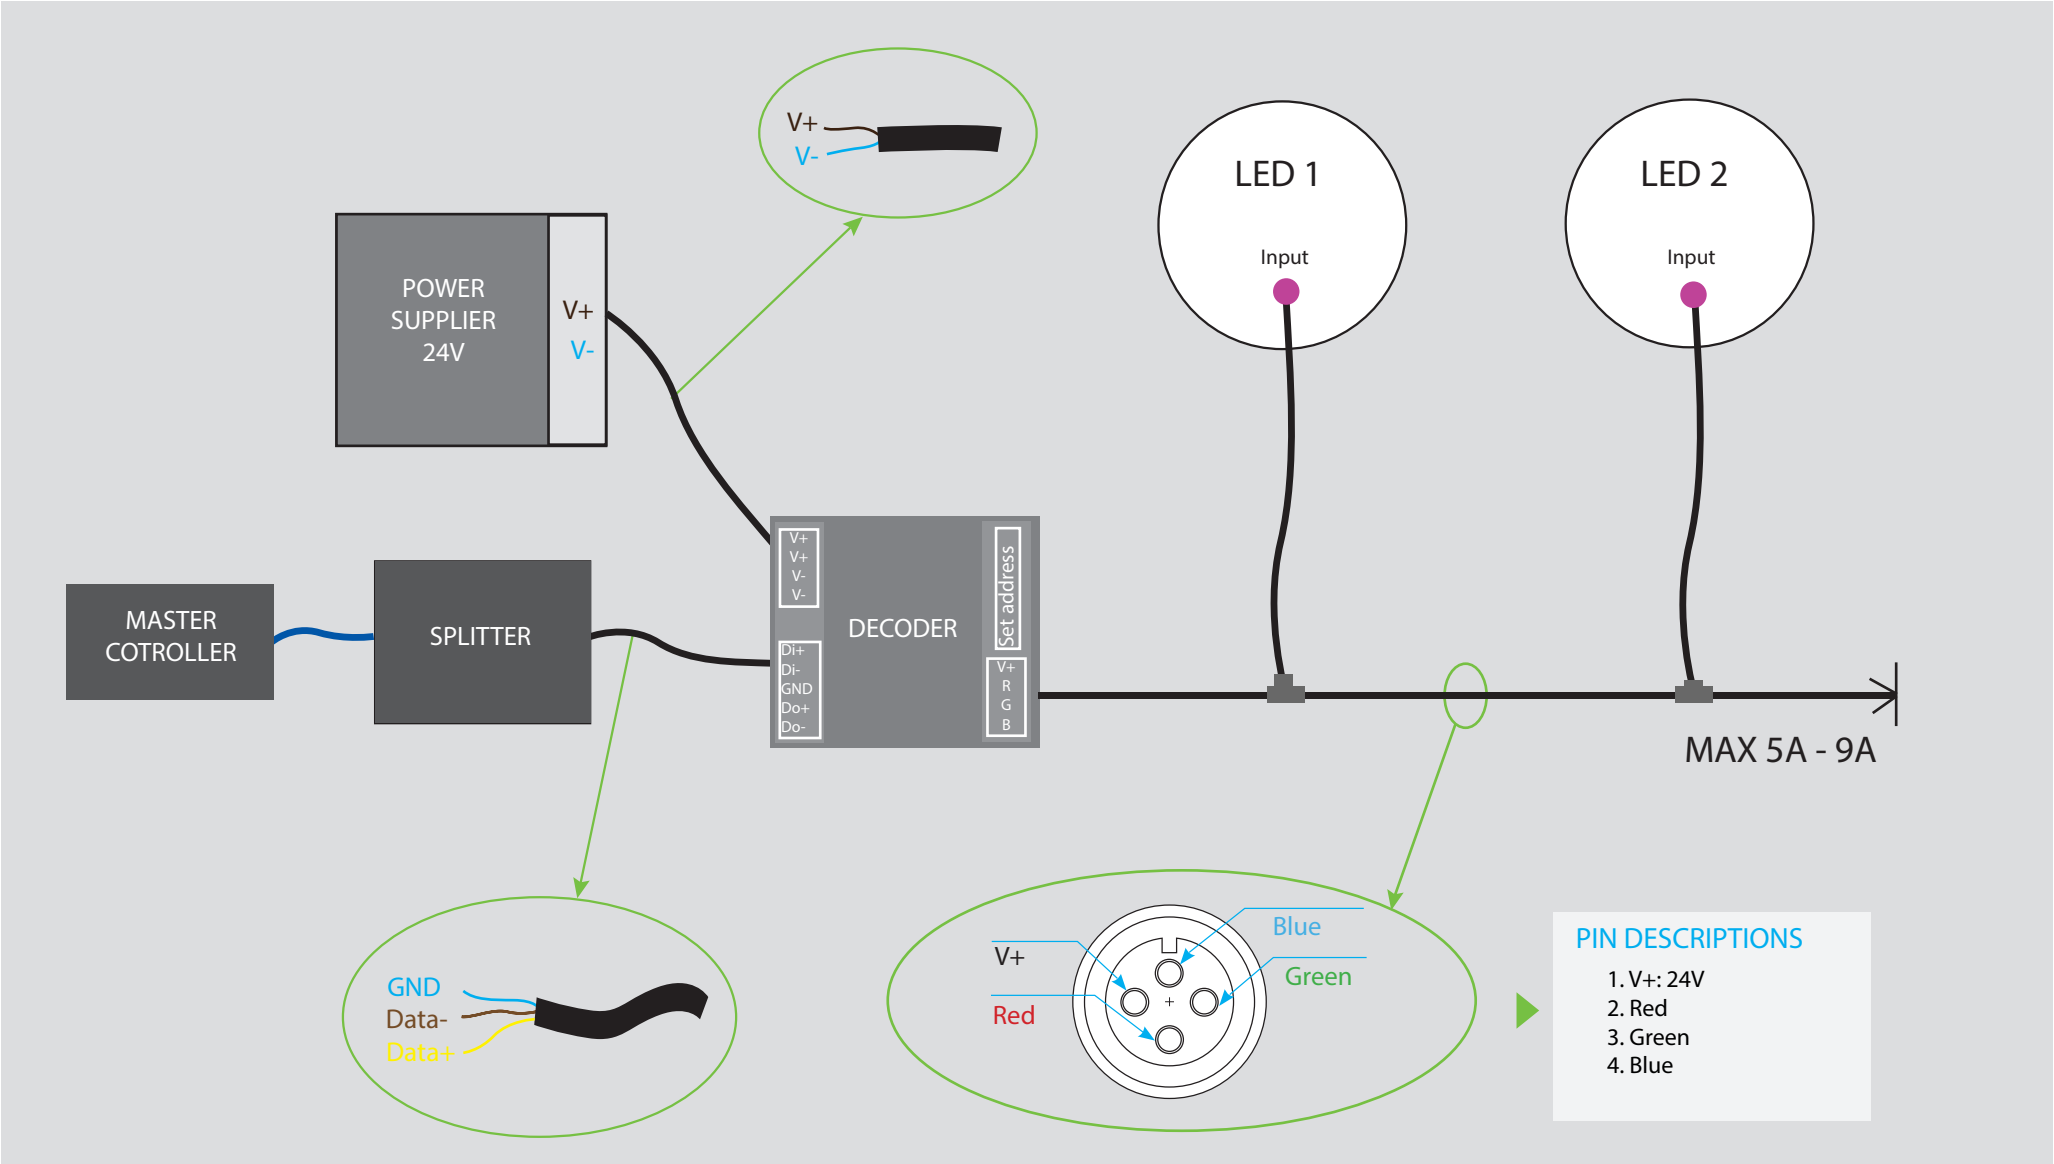

LED INGROUND LIGHT 9W

DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE

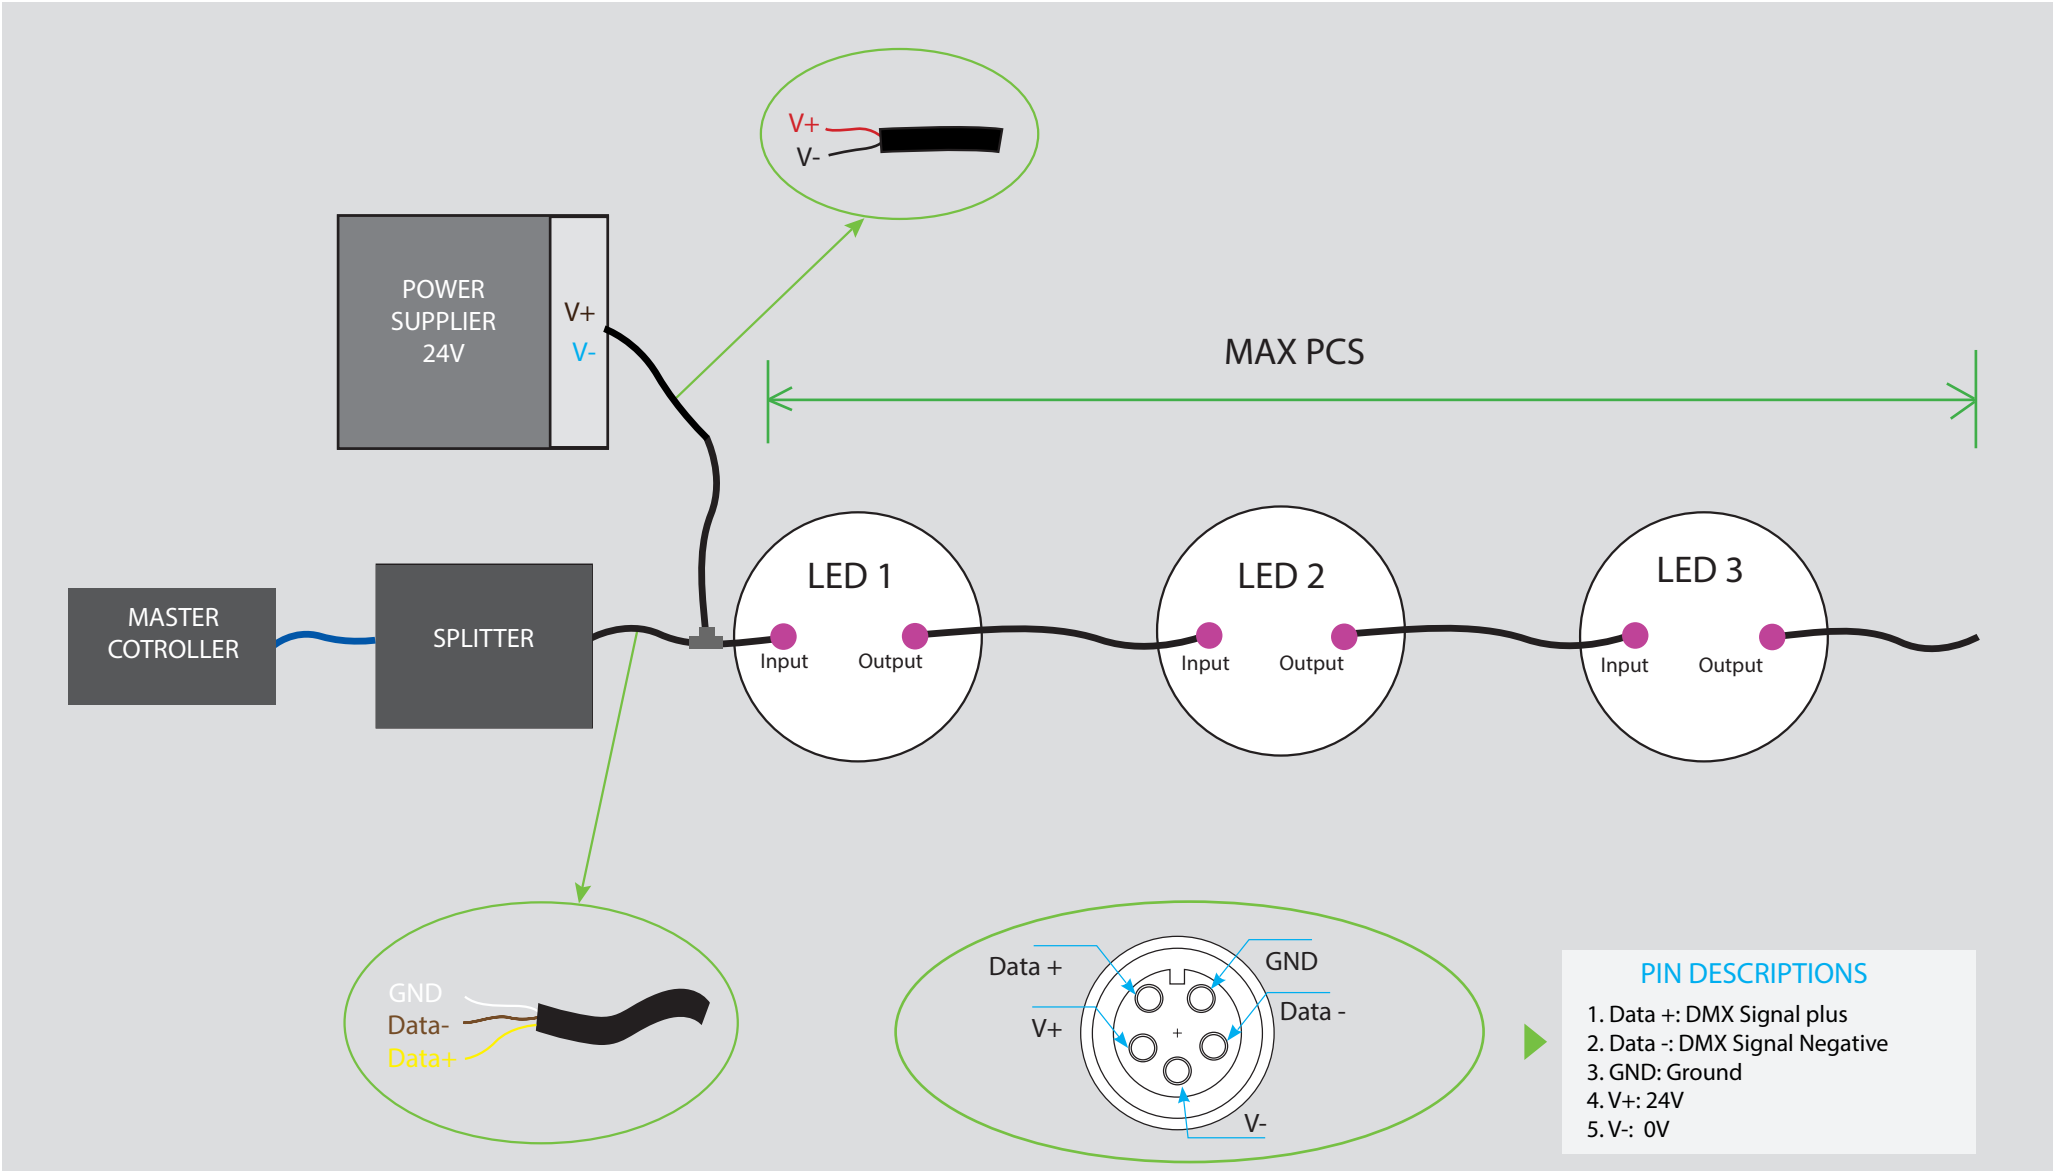

LED INGROUND LIGHT 9W - Applications

OUTDOOR

LANDSCAPE

HOTEL/RESTAURANT

FACADE BUILDING

LED INGROUND LIGHT 9W - Applications

THANKS FOR YOUR

ATTENTION