



LED DOWNLIGHT 2X6W - SERIES G
PRODUCT INDOOR




ASLED LIGHT CO.,LTD

LED DOWNLIGHT 2X6W

02

SPECIFICATION

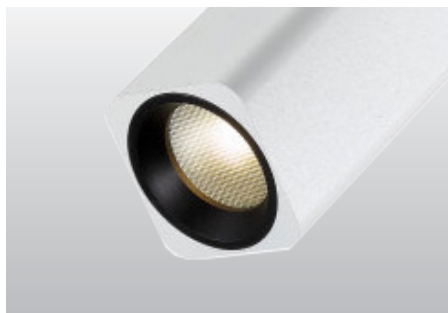

SPECIFICATION


- Order Code: DG012
- Input Voltage: 24Vdc, 220Vac, Dimmable
- Dimension: L300xW140xH135 mm
- Chip LED: CREE
- Power consumption: 2x6W
- Luminous Flux: 2x540lm at 3000K, 2x6W, CRI>90, 36°
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color[CRI]: 3000K, 4000K, 5000K
- CRI > 90
- Beam angle: 12° 25° 36° 50°
- IP Rating: IP20
- Life time: 50.000 hours
- Control: ON/OFF, 0 - 10V, DALI, DMX
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires




LED DOWNLIGHT 2X6W

TECHNICAL DETAILS


TECHNICAL DETAILS

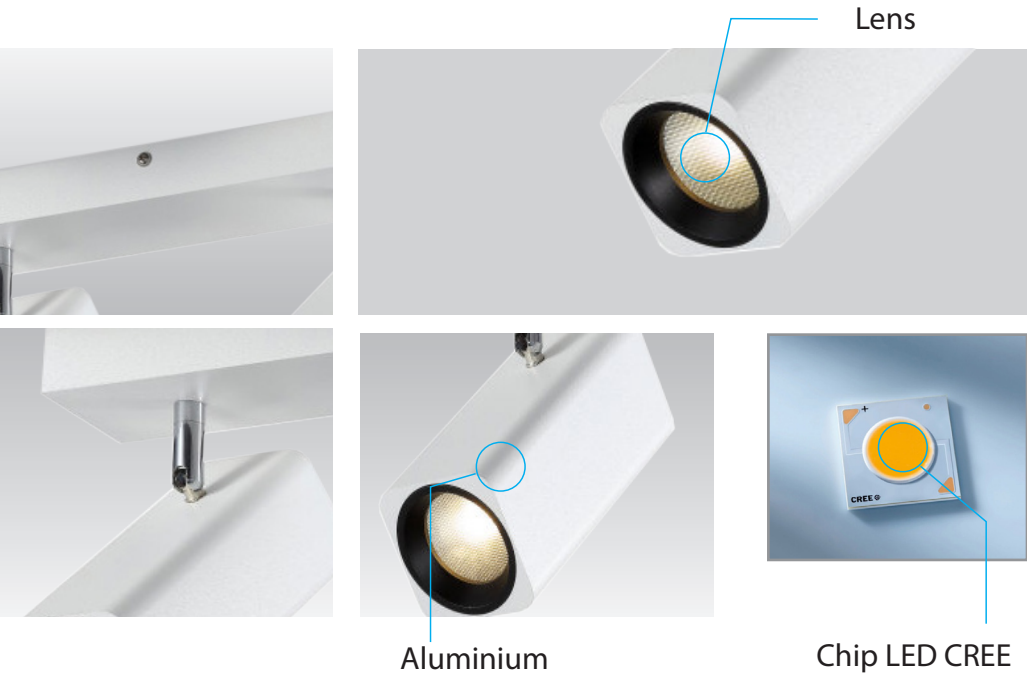



Legace



Select Color XX

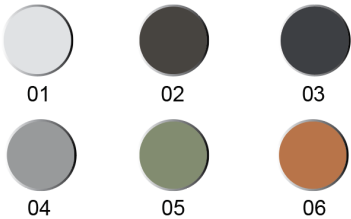

DIMENSIONS

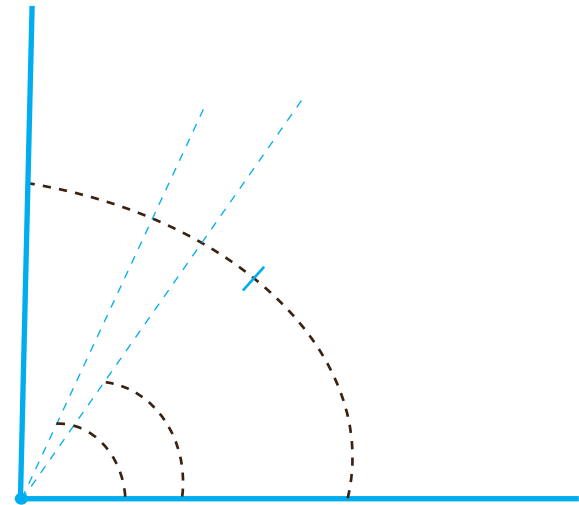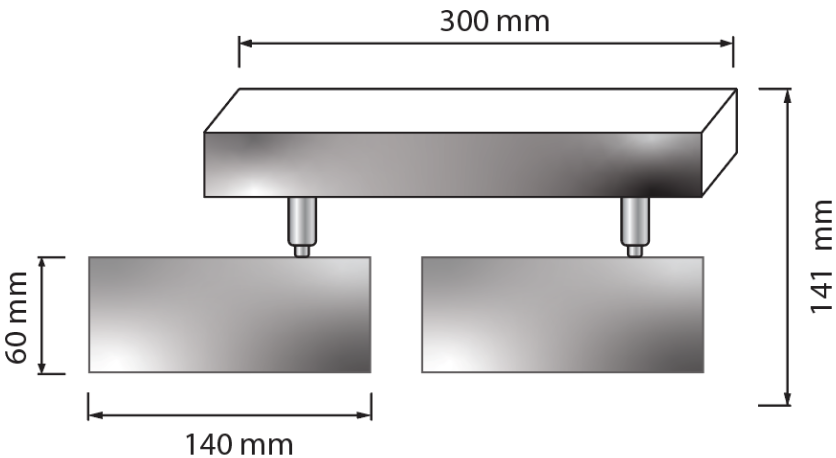

Beam Angle: 12° 24° 36° 50°



LED DOWNLIGHT 2X6W

04


SPECIFICATION

2x6W 3000K

PHOTOMETRIC CURVE BEAM 36° AMPLITUDE DIAGRAM

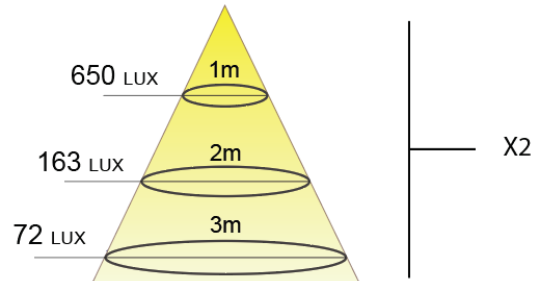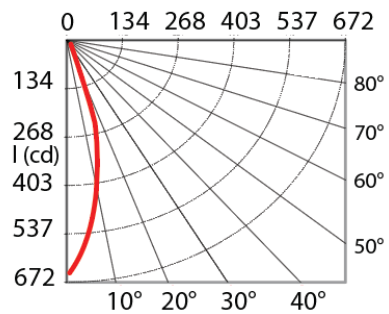

INSTALLATION

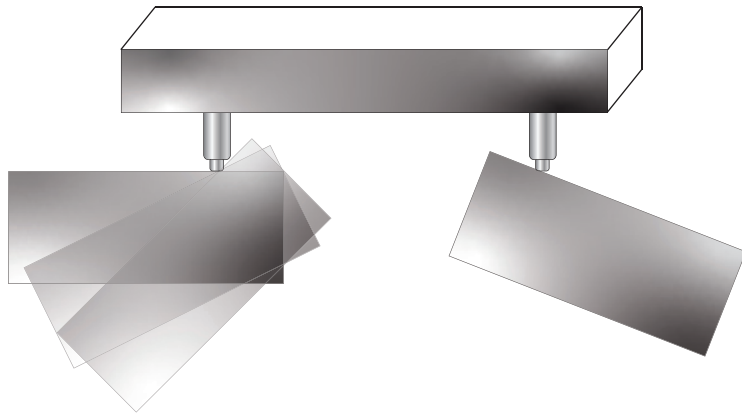

LED DOWNLIGHT 2X6W- Applications

05



INDOOR



OFFICE



HOTEL/RESTAURANT



LED DOWNLIGHT 2X6W - Applications





THANKS FOR YOUR
ATTENTION