




LED FLOODLIGHT 300W - SERIES B
PRODUCT OUTDOOR



LED FLOODLIGHT 300W

SPECCIFICATION

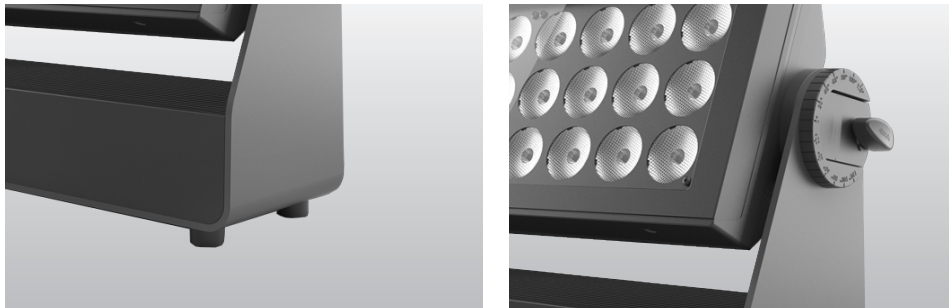

SPECCIFICATION



- Order Code: FB300, FB300RGBW
- Input Voltage: 24VDC, 48VDC, 220VAC
- Dimension: L441xW200xH320 mm
- Chip LED: CREE
- Power consumption: 300W
- Lumen Output: 27.000 lm
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color[CRI]: 3000K, 4000k, 5000k, RGBW
- CRI: >90
- Beam angle: 12° 15° 24° 36° 50°
- IP Rating: IP68
- Life time: 50.000 hour
- Control: ON/OFF, DIM 0 - 10V, DALI, DMX512
- Standards:
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires




LED FLOODLIGHT 300W

TECHNICAL DETAILS


TECHNICAL DETAILS

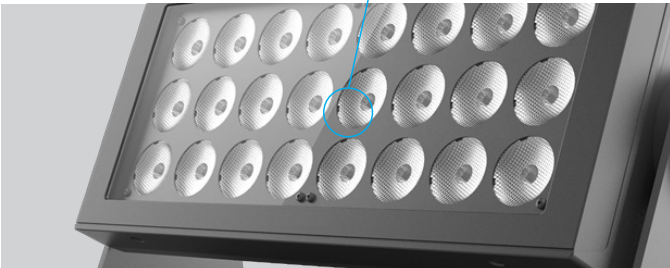

Lens

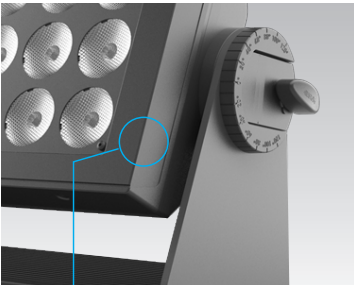


Aluminium




Chip LED CREE

Legace





Select Color XX

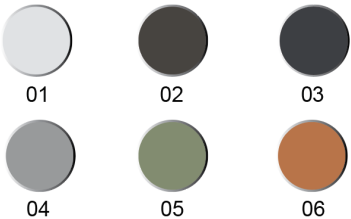

Lens Clear




DIMENSIONS

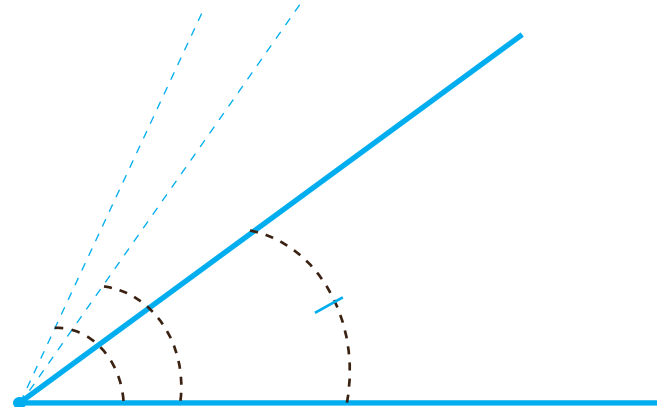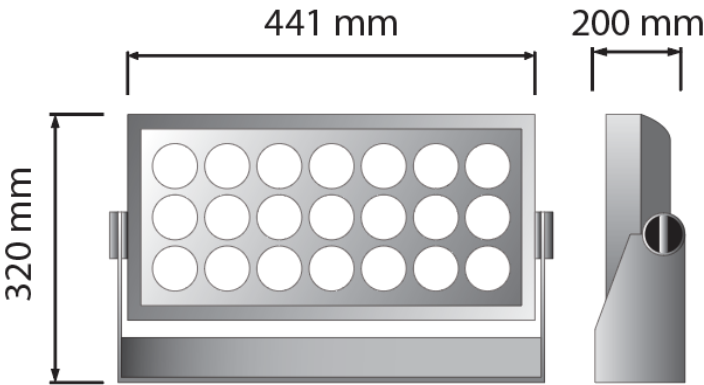


Beam Angle: 12° 15° 24° 36° 50°

LED FLOODLIGHT 300W


SPECIFICATION

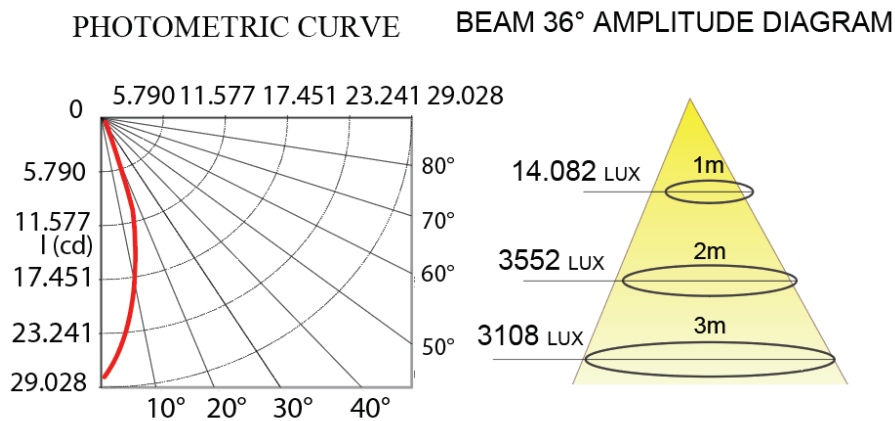

INSTALLATION

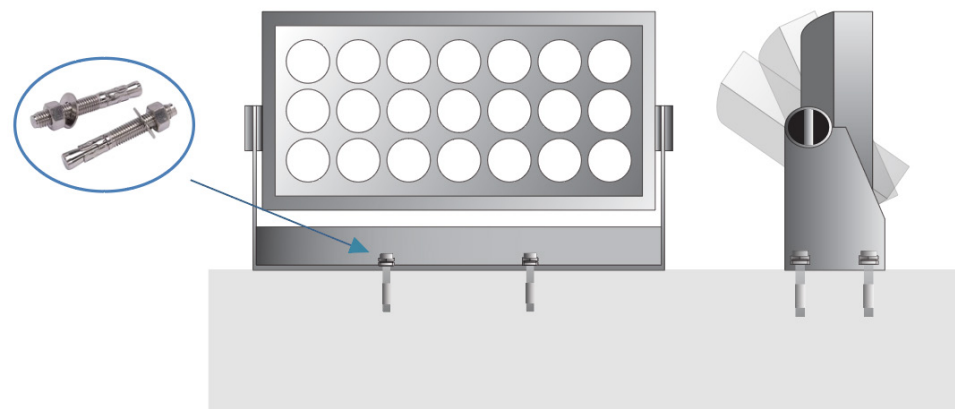


CONNECTOR IP68

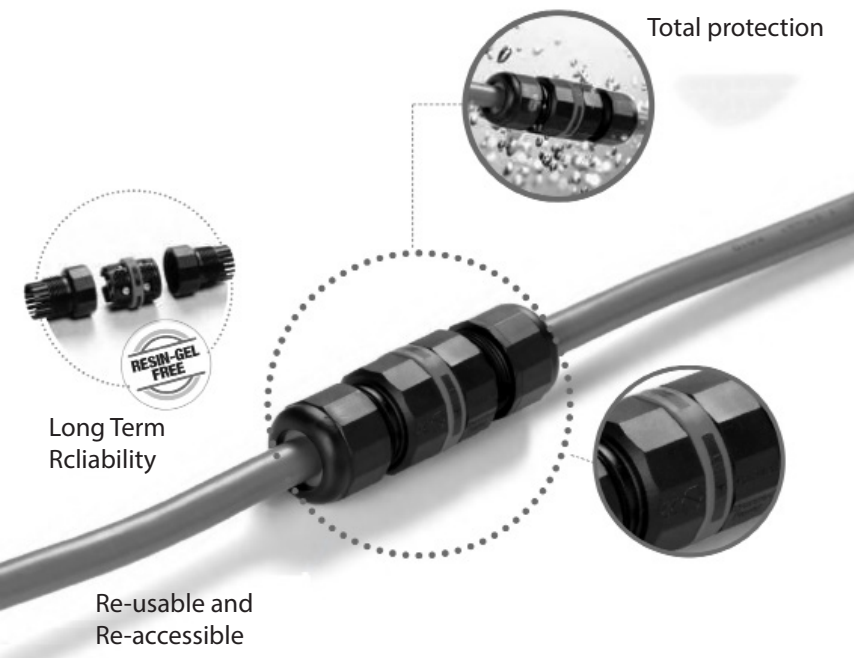

LED FLOODLIGHT 300W

05


POWER SUPPLIES - INPUT VOTAGE

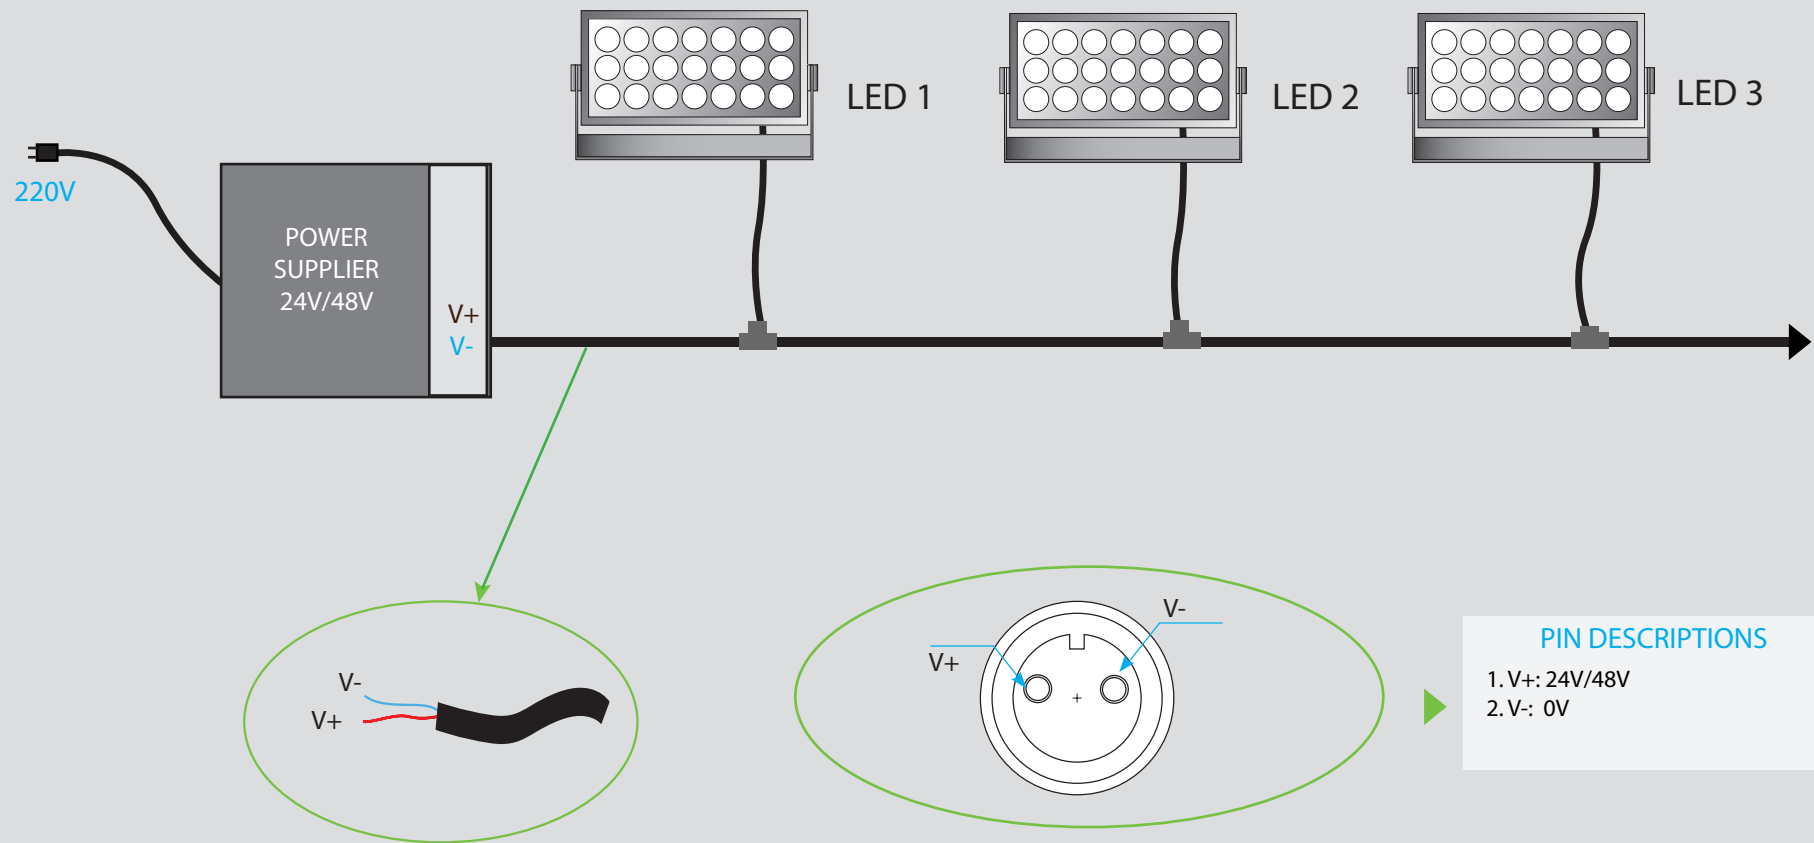

LED FLOODLIGHT 300W

06


DIAGRAM CONNECTOR - DMX PROTOCOL - 4 CORE & DECODER

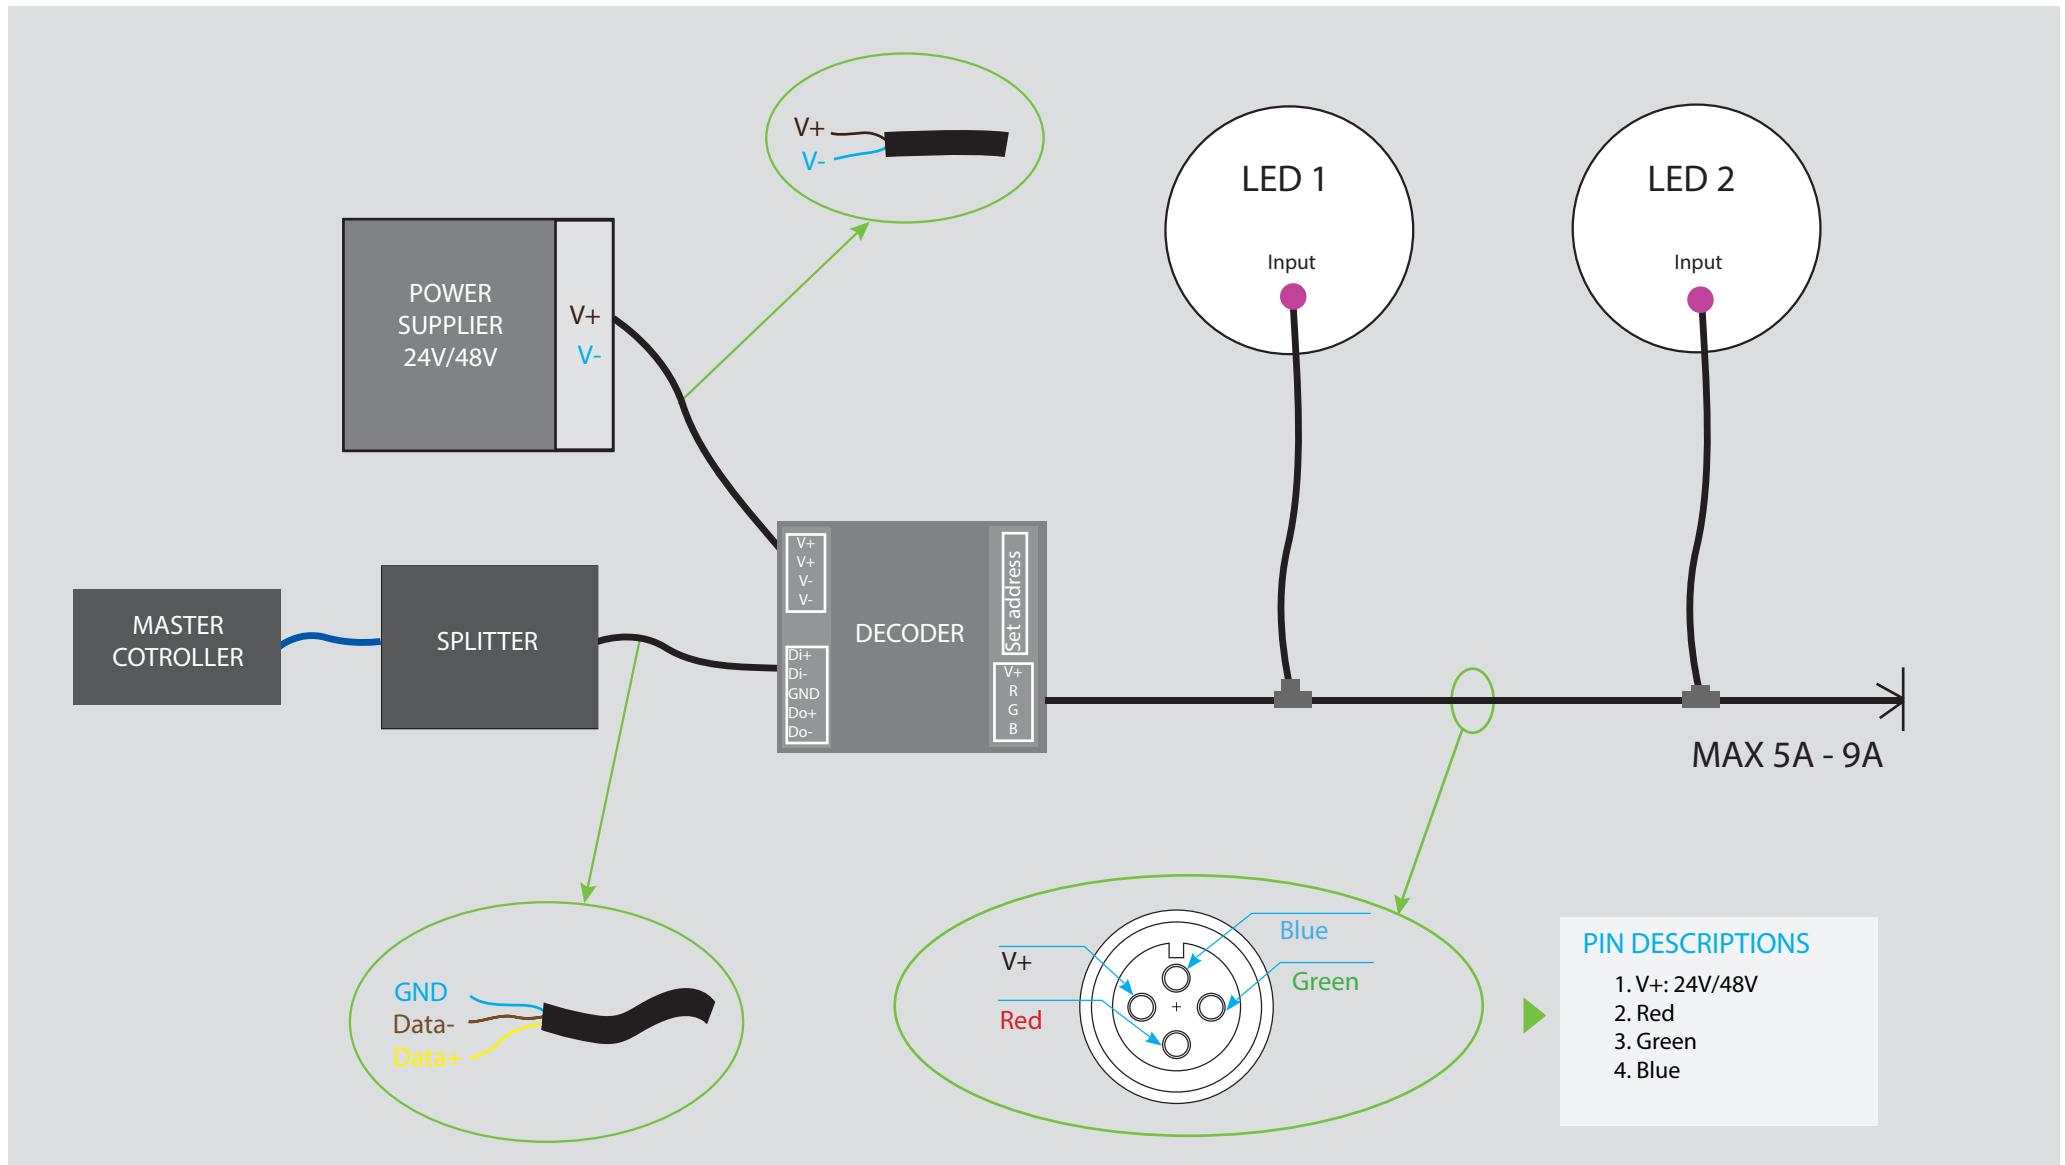

LED FLOODLIGHT 300W


07

DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE

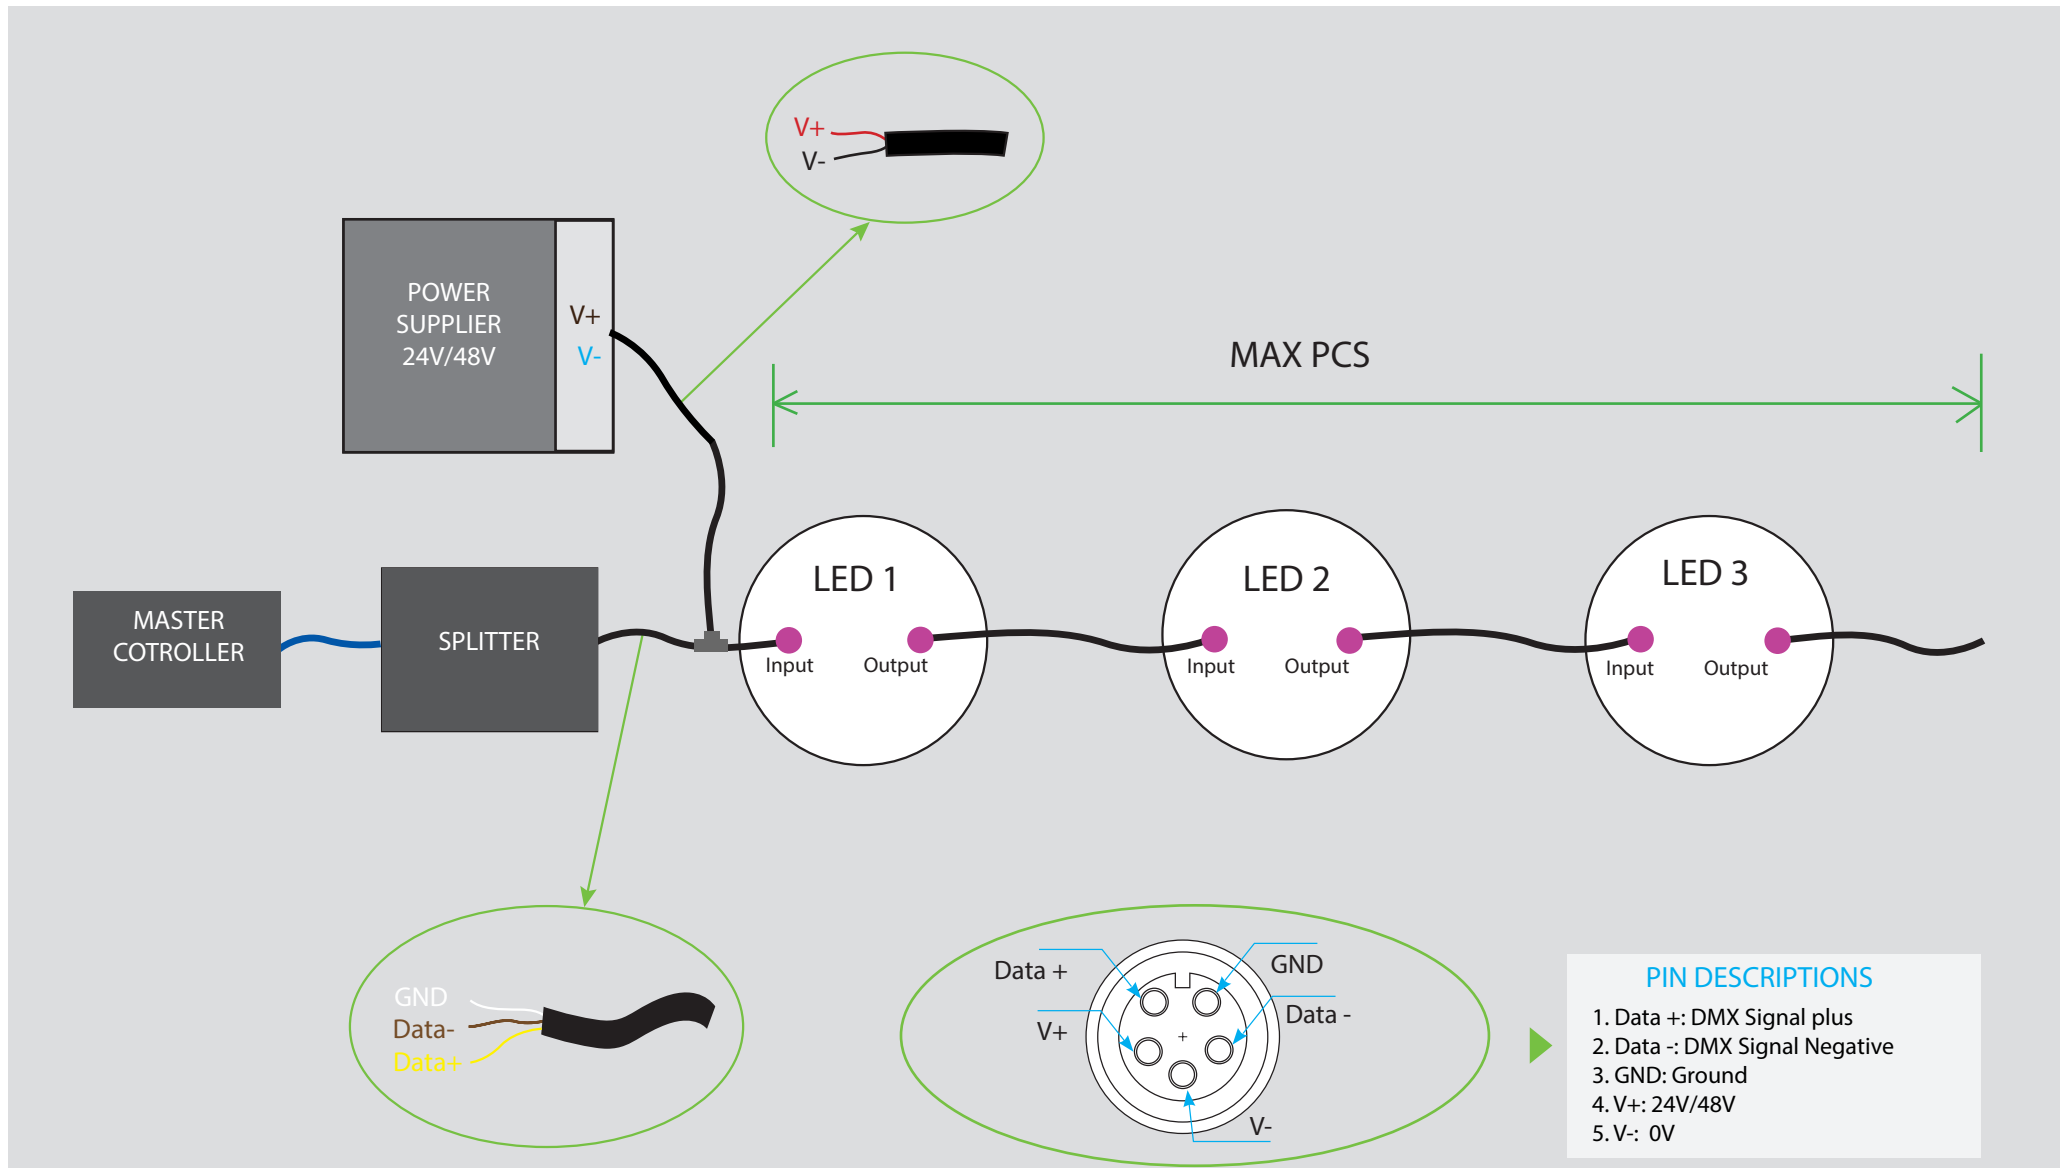

LED FLOODLIGHT 300W - Applications

08



OUTDOOR



LANDSCAPE



HOTEL/RESTAURANT



FACADE BUILDING



LED FLOODLIGHT 300W - Applications





THANKS FOR YOUR
ATTENTION