LED BOLLARD LIGHT 1W - SERIES A
PRODUCT OUTDOOR

ASLED

LED BOLLARD LIGHT 1W

SPECCIFICATION

SPECCIFICATION

- Order Code: BA1001, BA2001, BA3001, BA4001
- Input Voltage: 24VDC, 220V
- Dimension: Ø100xH650/H800/1100/H1400 mm
- Chip LED: CREE
- Power consumption: 1W
- Lumen Output: 900 lm
- Material: Aluminium & Stainless Steel
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color[CRI]: 3000K, 4000k, 5000k
- Beam angle: 360°
- IP Rating: IP67
- Impact Resistance IK: IK06
- Life time: 50.000 hour
- Control: ON/OFF, DIM 0 - 10V, DALI, DMX512
- Standards:
  + RoHS; EMC protection
  + IEC 62031LED
  + IEC 60598 Luminaires

IP67 RoHS CE

LED BOLLARD LIGHT 1W

TECHNICAL DETAILS

TECHNICAL DETAILS

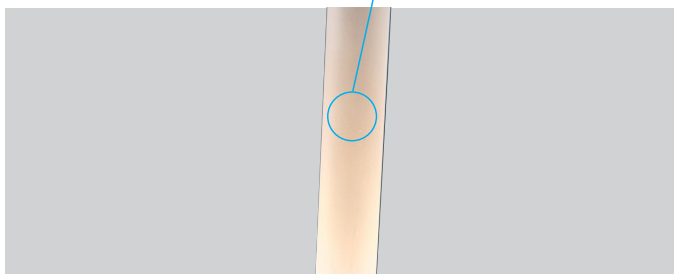

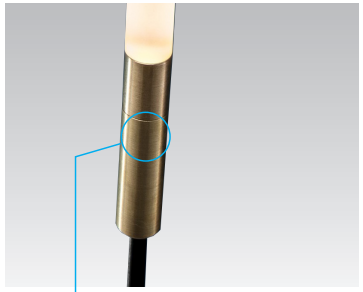



DIMENSIONS

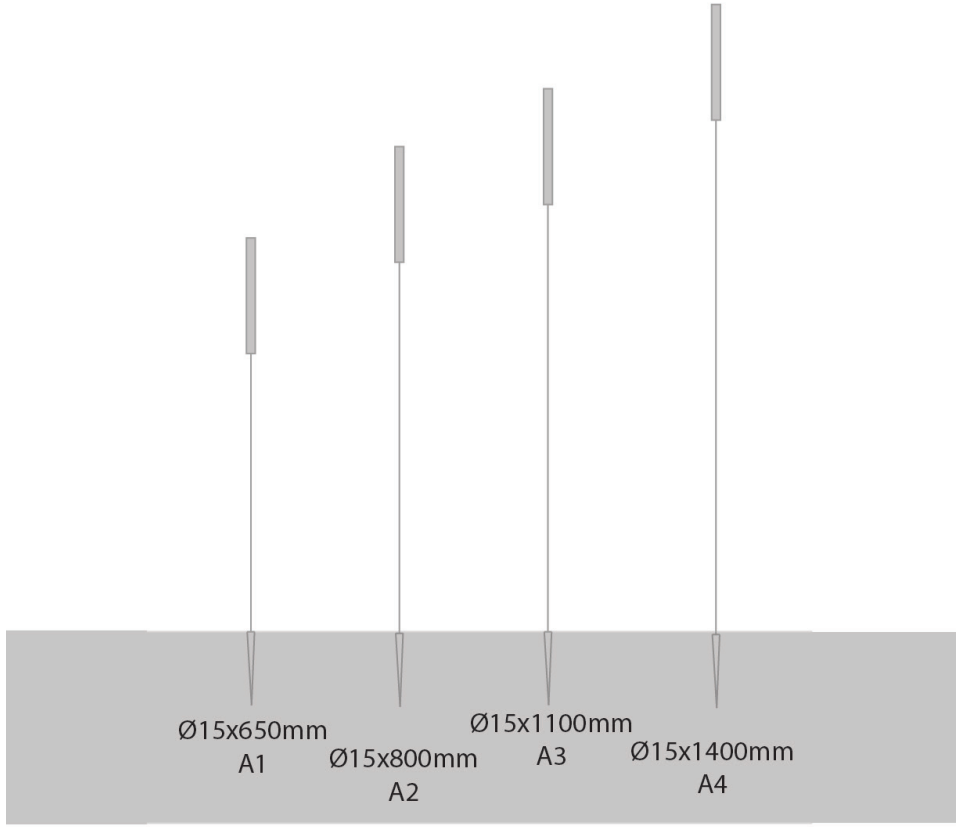

LED BOLLARD LIGHT 1W

POWER SUPPLIES - INPUT VOTAGE

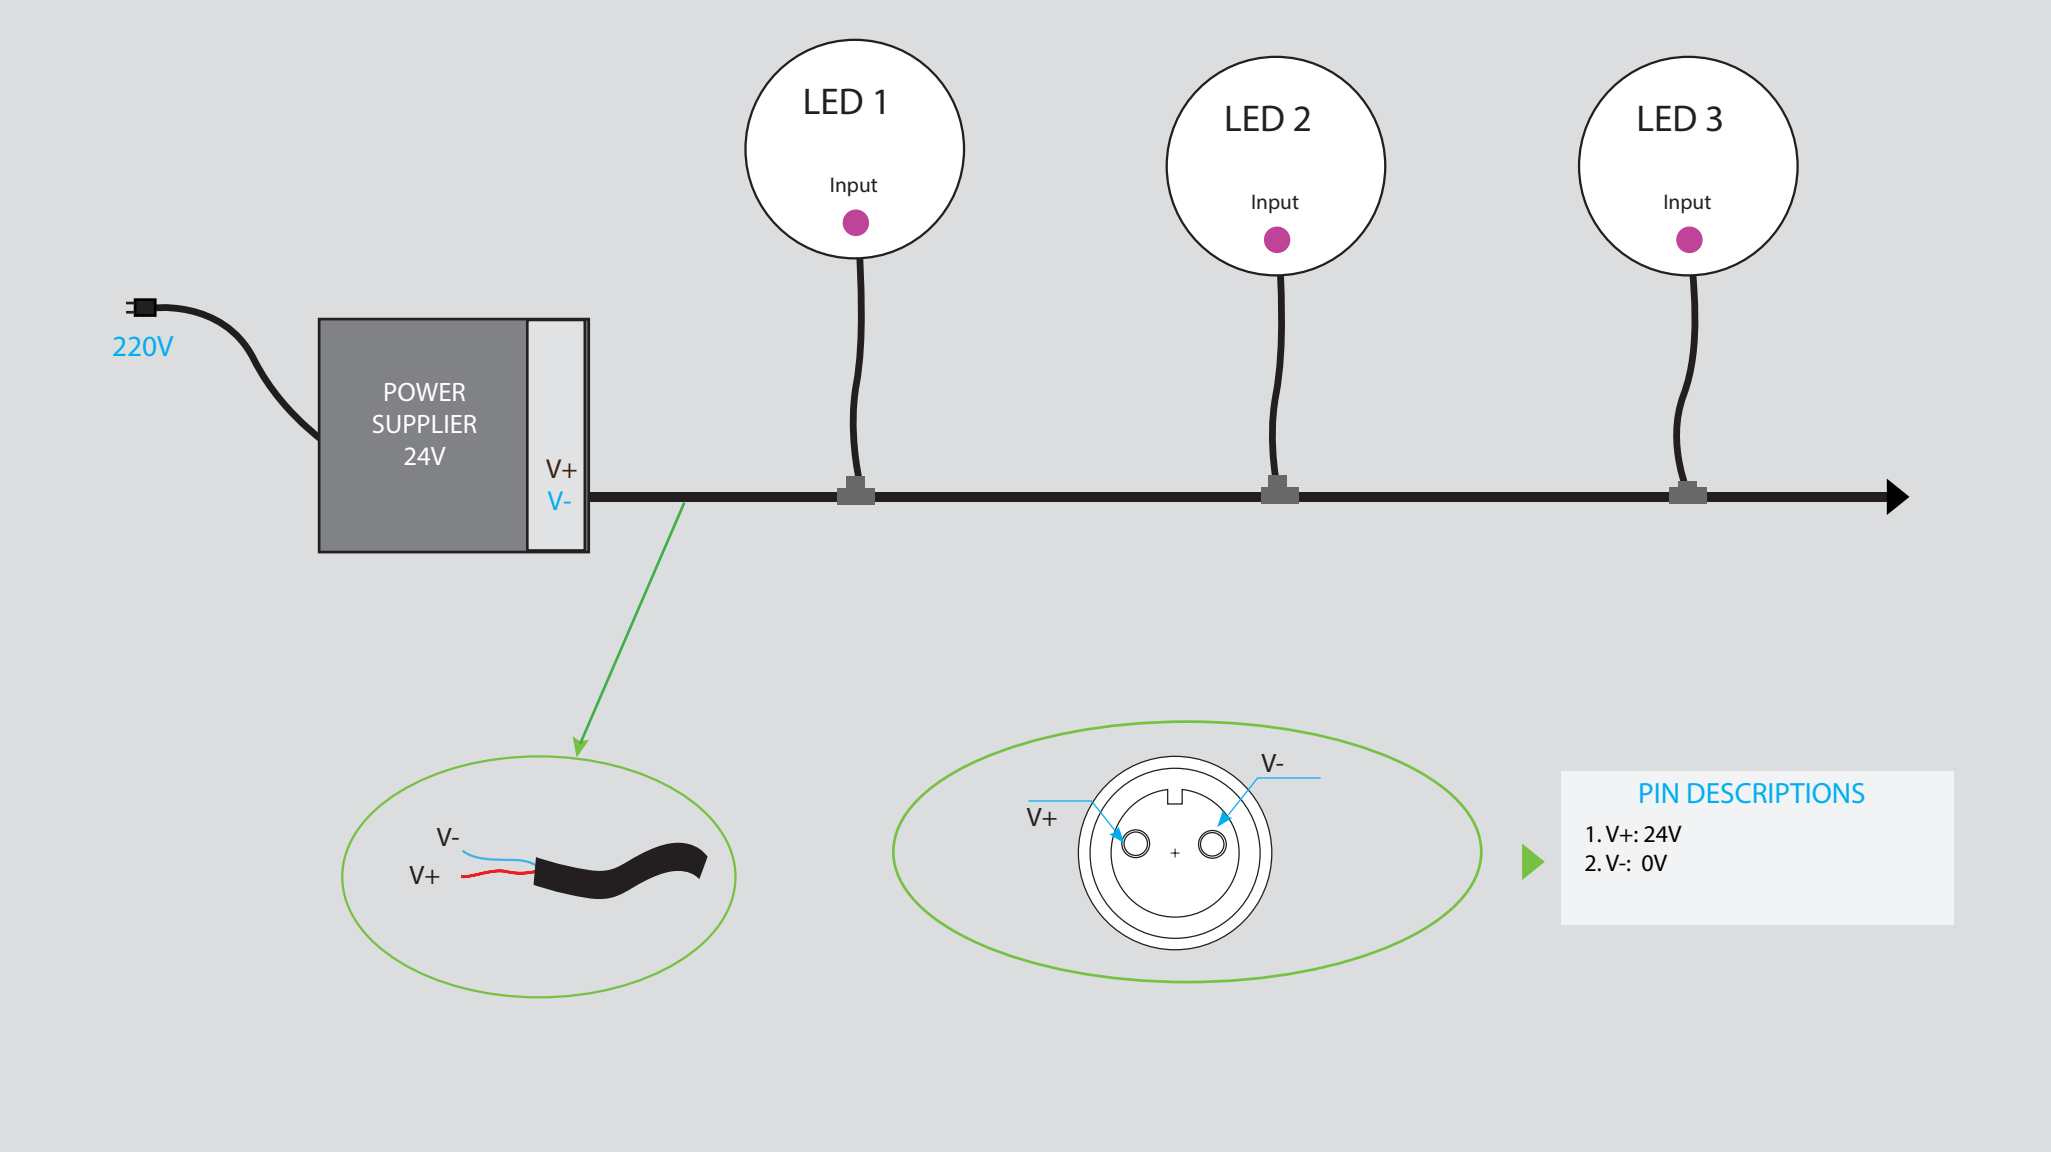

LED BOLLARD LIGHT 1W - Applications



OUTDOOR

LANDSCAPE

HOTEL/RESTAURANT

FACADE BUILDING

LED BOLLARD LIGHT 1W - Applications

THANKS FOR YOUR

ATTENTION