



LED FLOODLIGHT 60W - SERIES A
PRODUCT OUTDOOR



LED FLOODLIGHT 60W

SPECCIFICATION



SPECCIFICATION


- Order Code: FA060, FA060RGBW
- Input Voltage: 24VDC, 48VDC, 220VAC
- Dimension: L182xW103xH260 mm
- Chip LED: CREE
- Power consumption: 60W
- Lumen Output: 5400 lm
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color[CRI]: 3000K, 4000k, 5000k, RGBW
- CRI: >90
- Beam angle: 12° 24° 36° 50°
- IP Rating: IP68
- Life time: 50.000 hour
- Control: ON/OFF, DIM 0 - 10V, DALI, DMX512
- Standards:
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires



LED FLOODLIGHT 60W

TECHNICAL DETAILS


TECHNICAL DETAILS

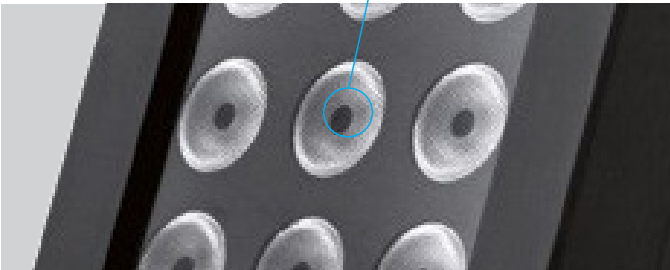

Lens




Aluminium




Chip LED CREE

Legace





Select Color XX

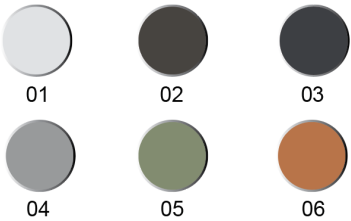

Lens Clear



DIMENSIONS

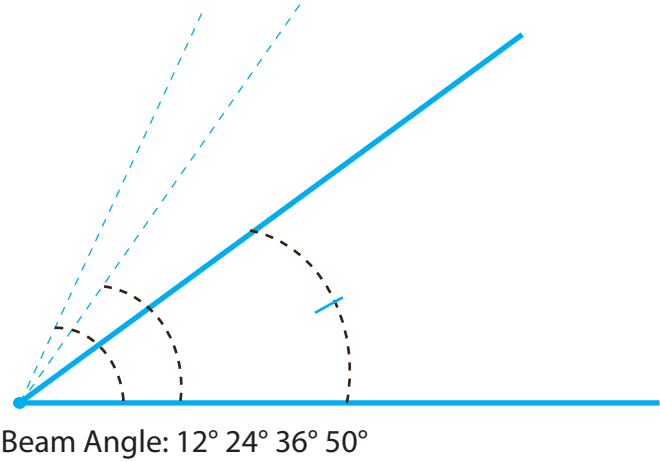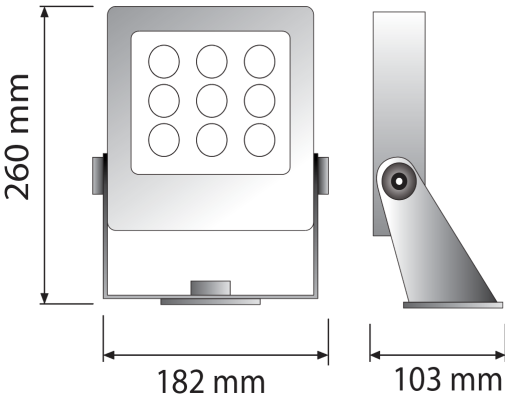


LED FLOODLIGHT 60W


04

SPECIFICATION


PHOTOMETRIC CURVE BEAM 36° AMPLITUDE DIAGRAM

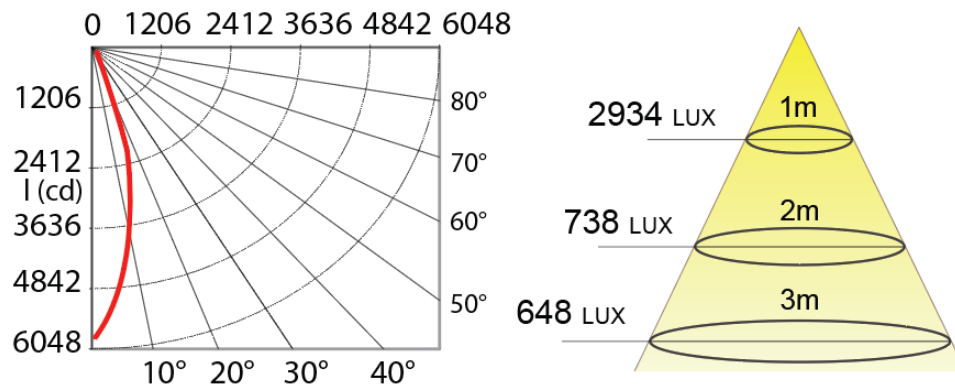

INSTALLATION

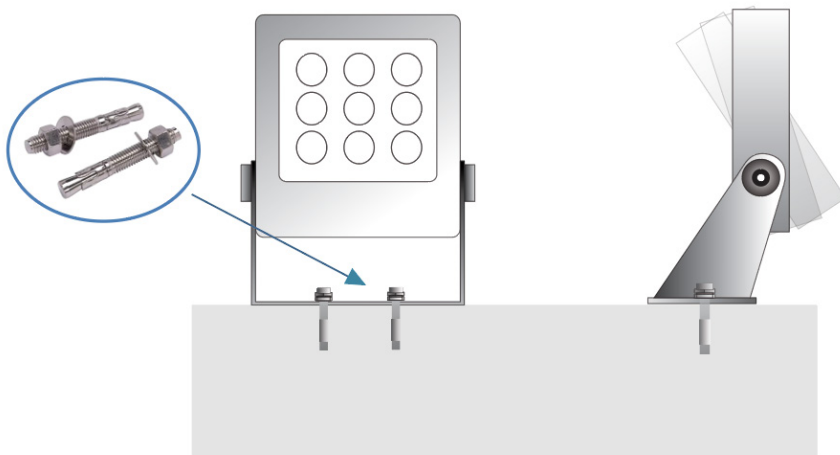


CONNECTOR IP68

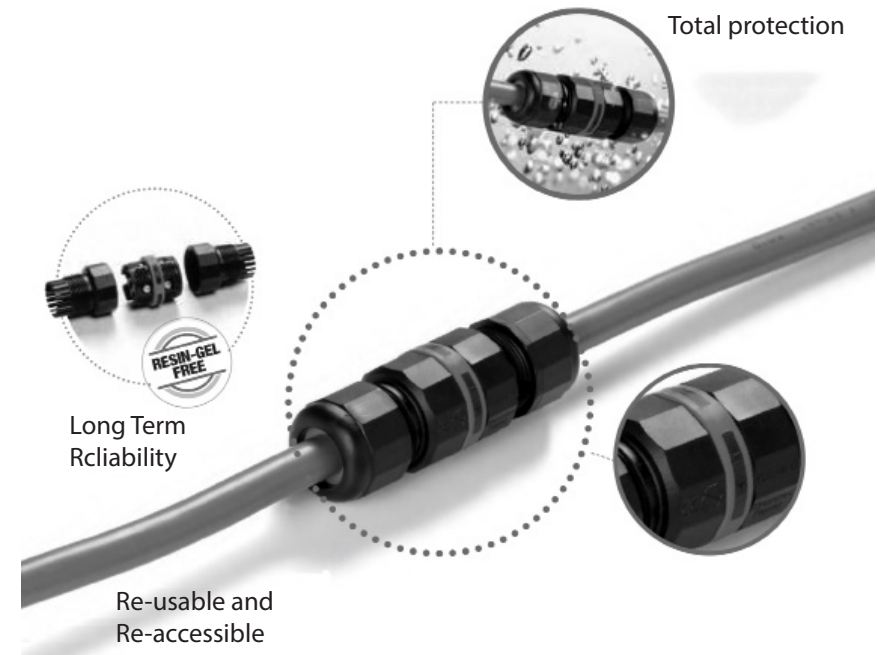

LED FLOODLIGHT 60W

05


POWER SUPPLIES - INPUT VOTAGE

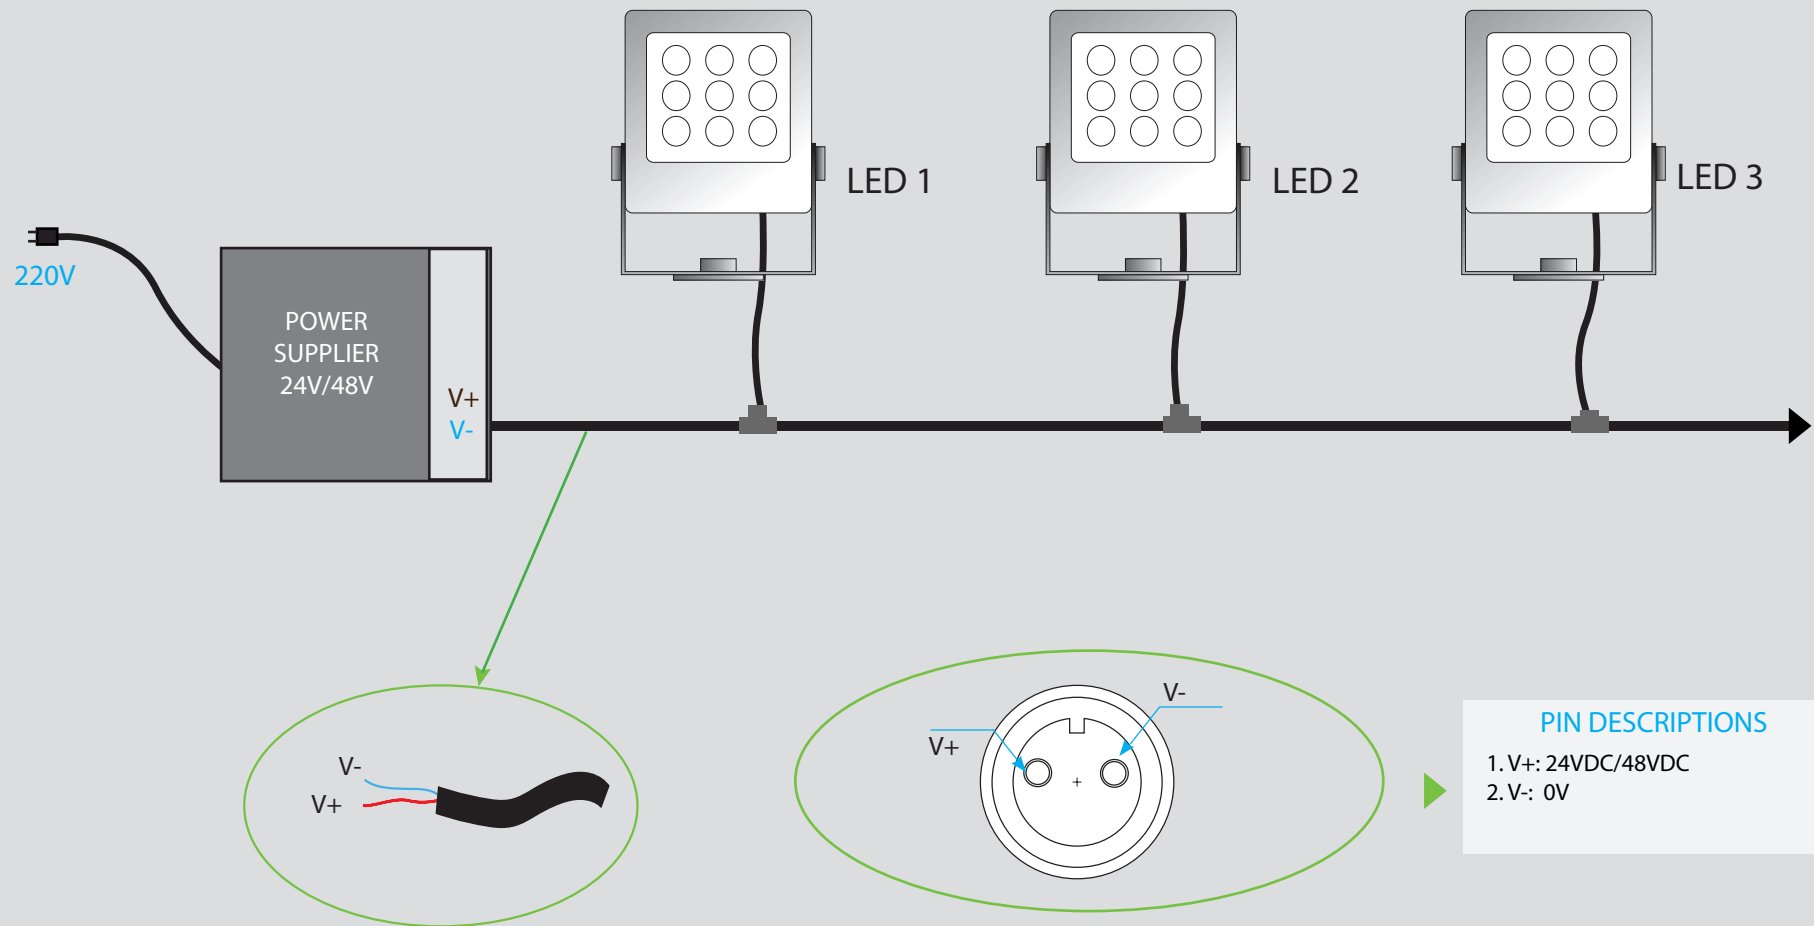

LED FLOODLIGHT 60W

06


DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE & DECODER

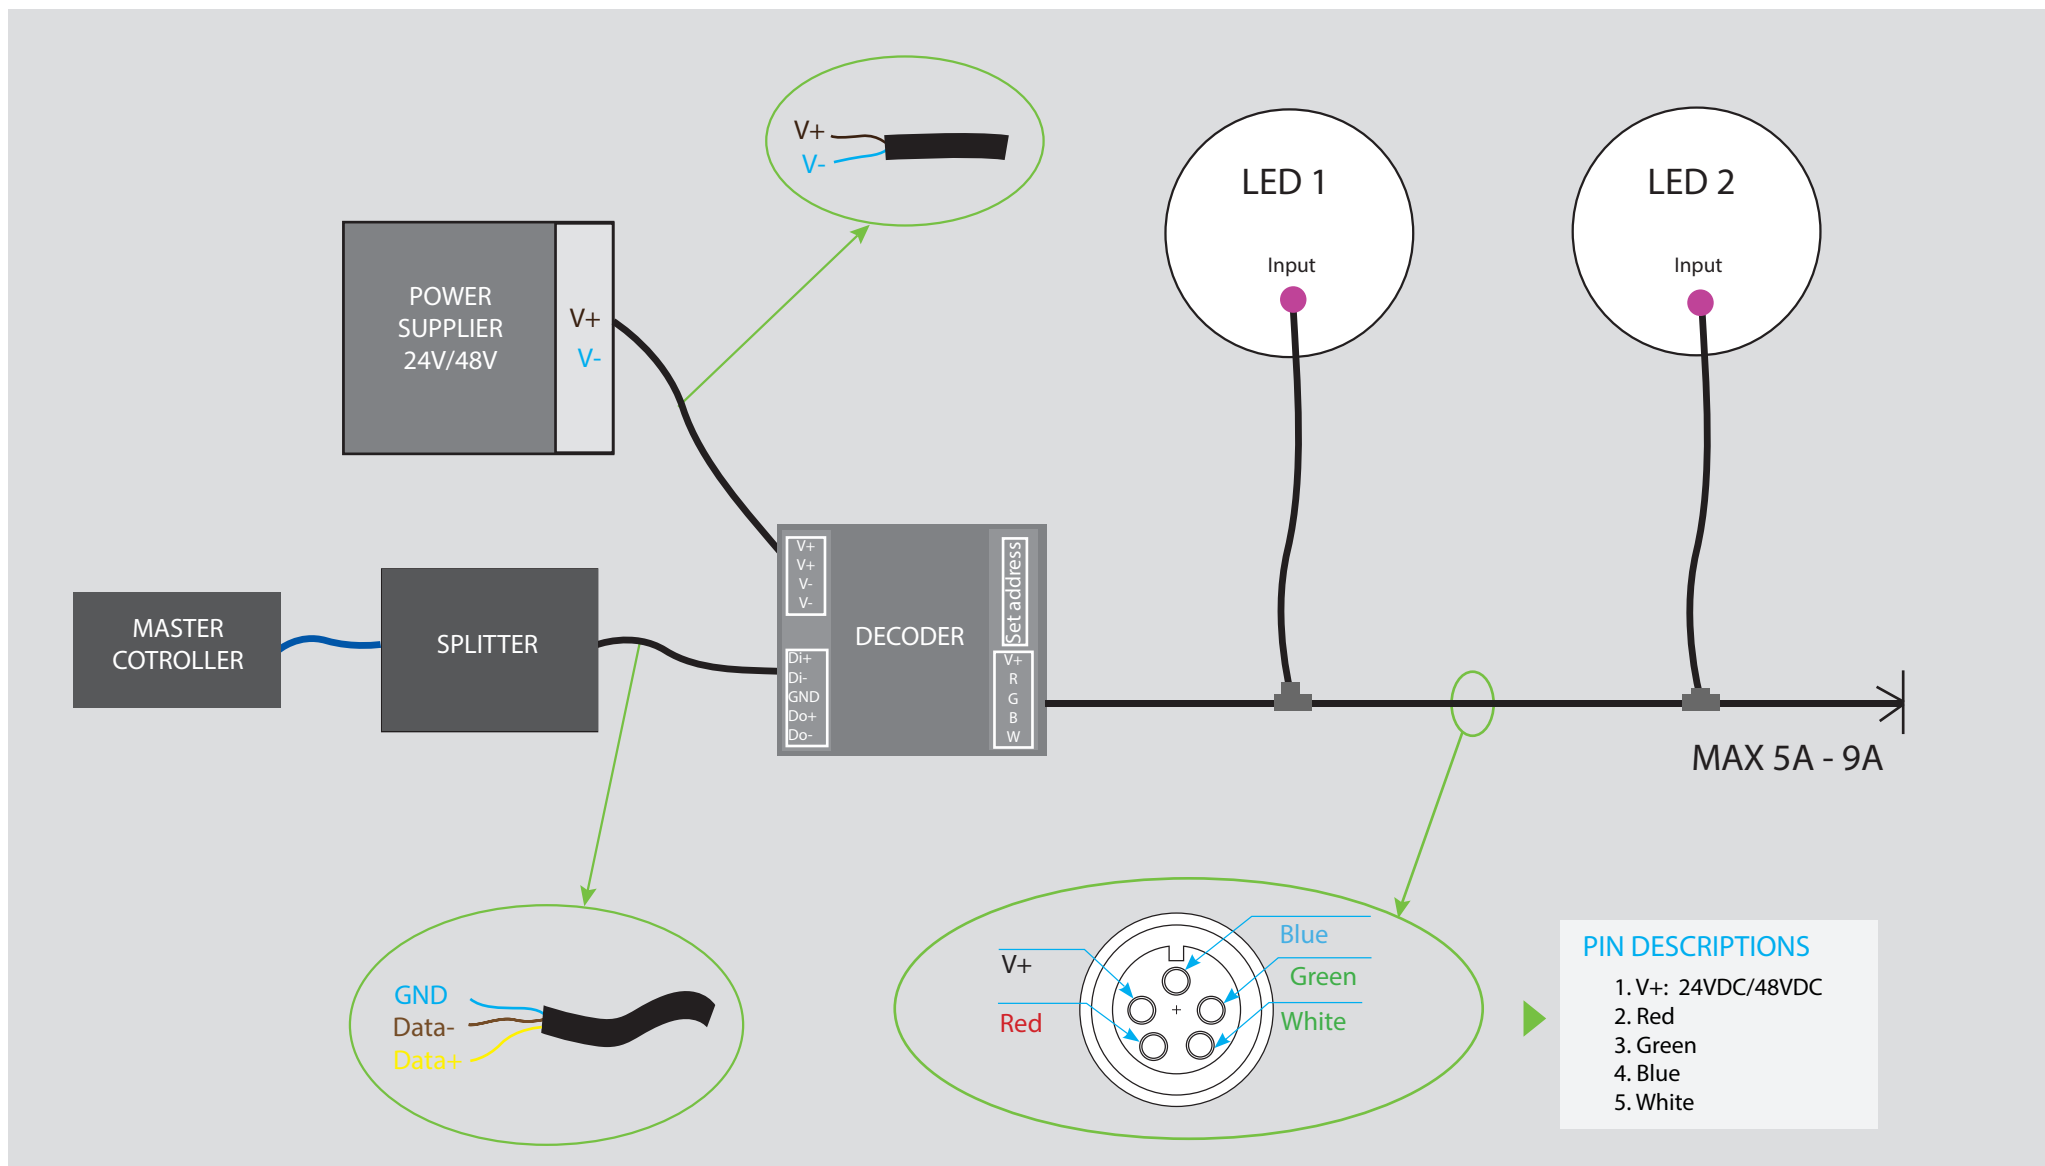

LED FLOODLIGHT 60W


07

DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE

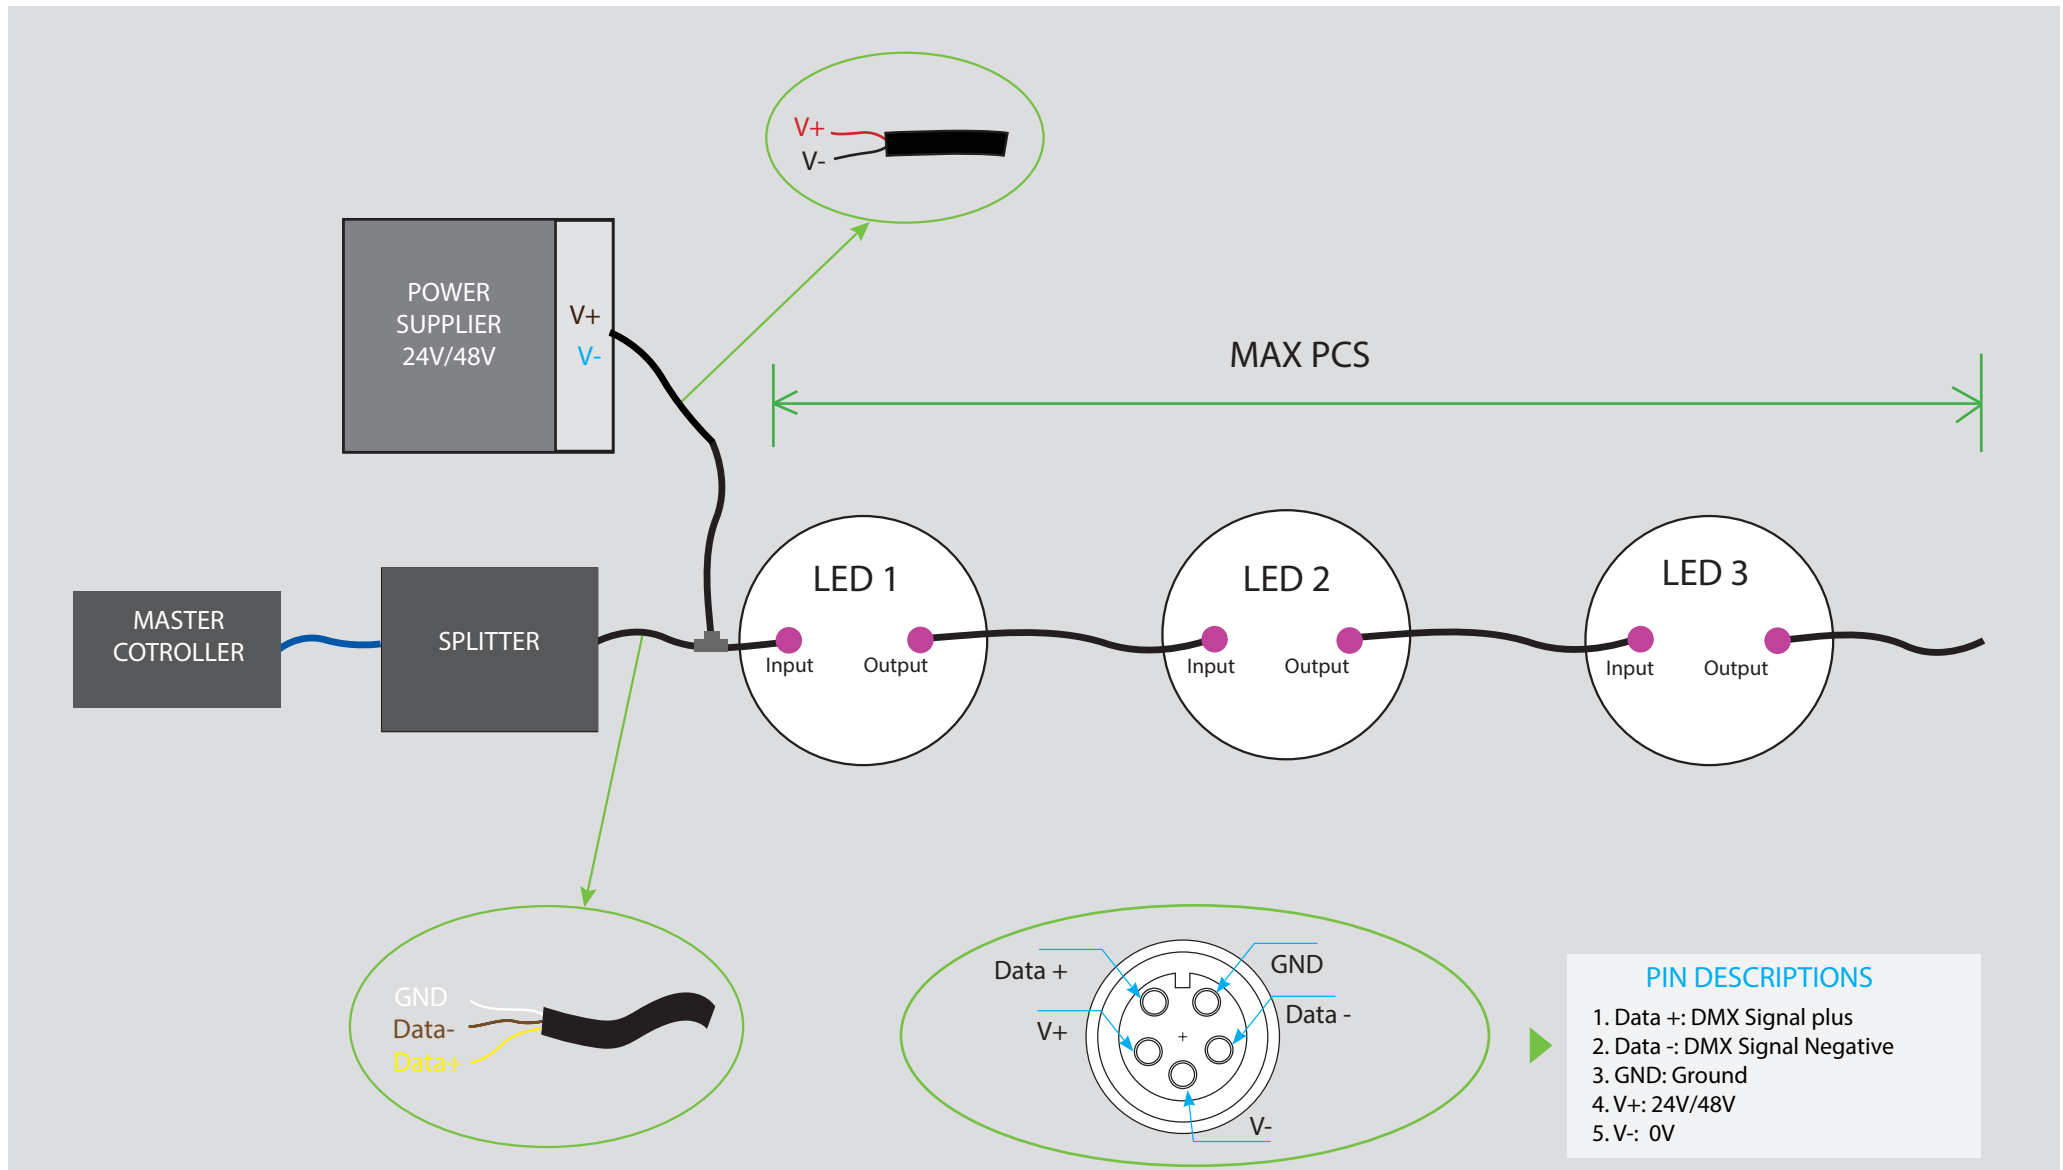

LED FLOODLIGHT 60W - Applications

08



OUTDOOR



LANDSCAPE



HOTEL/RESTAURANT



FACADE BUILDING



LED FLOODLIGHT 60W - Applications





THANKS FOR YOUR
ATTENTION