




LED BOLLARD LIGHT 15W - SERIES D
PRODUCT OUTDOOR



LED BOLLARD LIGHT 15W

SPECCIFICATION

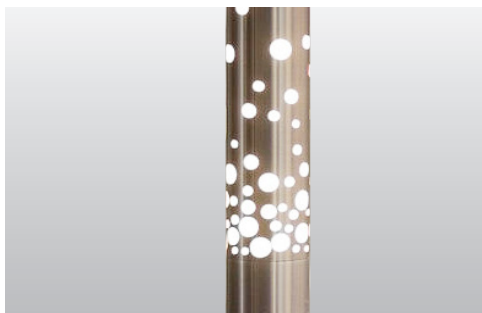

SPECCIFICATION


- Order Code: BD015
- Input Voltage: 24VDC, 220V
- Dimension: Ø127xH1146 mm
- Chip LED: CREE
- Power consumption: 15W
- Lumen Output: 1350 lm
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color[CRI]: 3000K, 4000k, 5000k, RGBW
- Beam angle: 360°
- IP Rating: IP67
- Impact Resistance IK: IK09
- Life time: 50.000 hour
- Control: ON/OFF, DIM 0 - 10V, DALI, DMX512
- Standards:
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires




LED BOLLARD LIGHT 15W

TECHNICAL DETAILS


TECHNICAL DETAILS

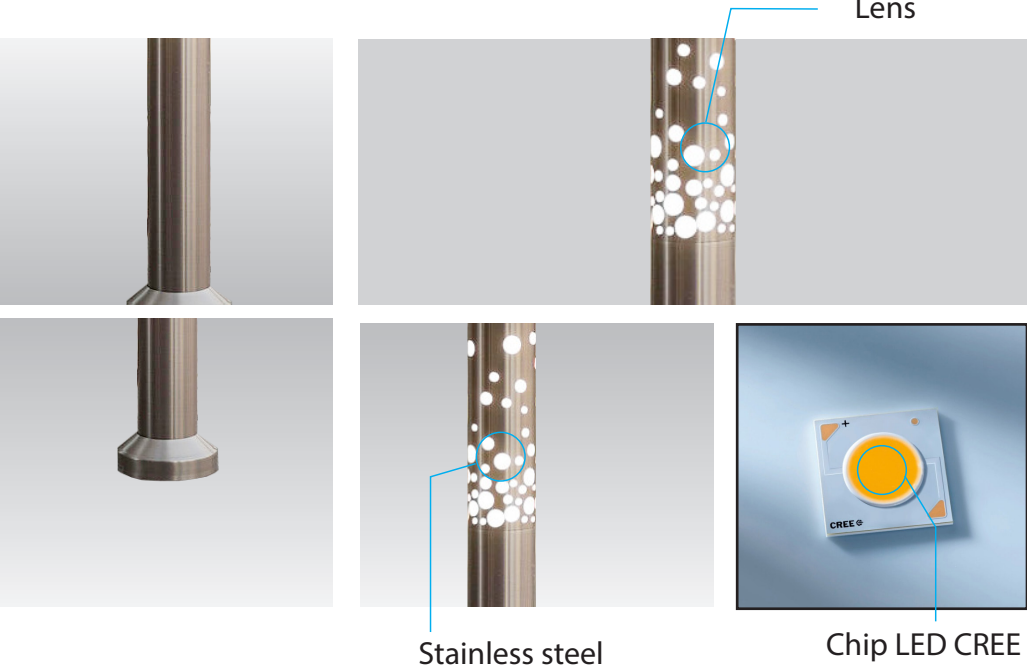


DIMENSIONS

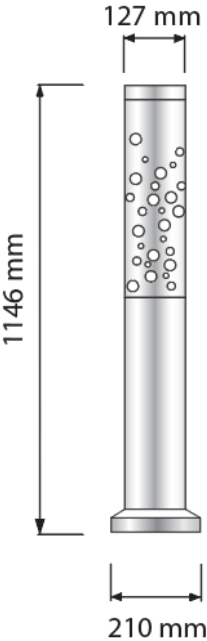

DIAGRAMS

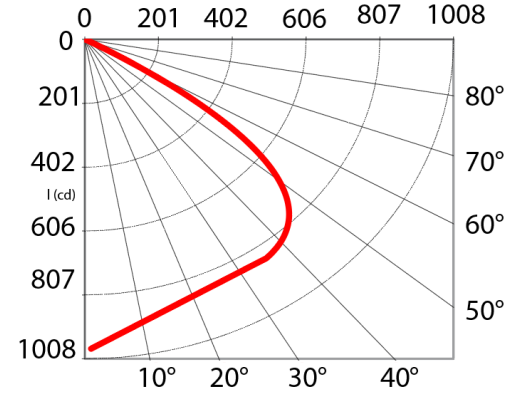

Select Color XX



POWER SUPPLIES - INPUT VOTAGE

220V

POWER SUPPLIER 24V/48V

V+
V-

LED 1
Input

LED 2
Input

LED 3
Input

V-
V+


V+
V-

PIN DESCRIPTIONS

1. V+: 24V
2. V-: 0V

LED BOLLARD LIGHT 15W - Applications

05



OUTDOOR



LANDSCAPE



HOTEL/RESTAURANT



FACADE BUILDING



LED BOLLARD LIGHT 15W - Applications





THANKS FOR YOUR
ATTENTION