



LED FLOODLIGHT 36W - SERIES A
PRODUCT OUTDOOR



ASLED LIGHT CO.,LTD

LED FLOODLIGHT 36W

SPECCIFICATION



SPECCIFICATION


- Order Code: FA036, FA036RGBW
- Input Voltage: 24VDC, 48VDC, 220VAC
- Dimension: L134xW63xH162 mm
- Chip LED: CREE
- Power consumption: 36W
- Lumen Output: 3240 lm
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color[CRI]: 3000K, 4000k, 5000k, RGBW
- CRI: >90
- Beam angle: 12° 24° 36° 50°
- IP Rating: IP68
- Life time: 50.000 hour
- Control: ON/OFF, DIM 0 - 10V, DALI, DMX512
- Standards:
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires



LED FLOODLIGHT 36W

TECHNICAL DETAILS



TECHNICAL DETAILS

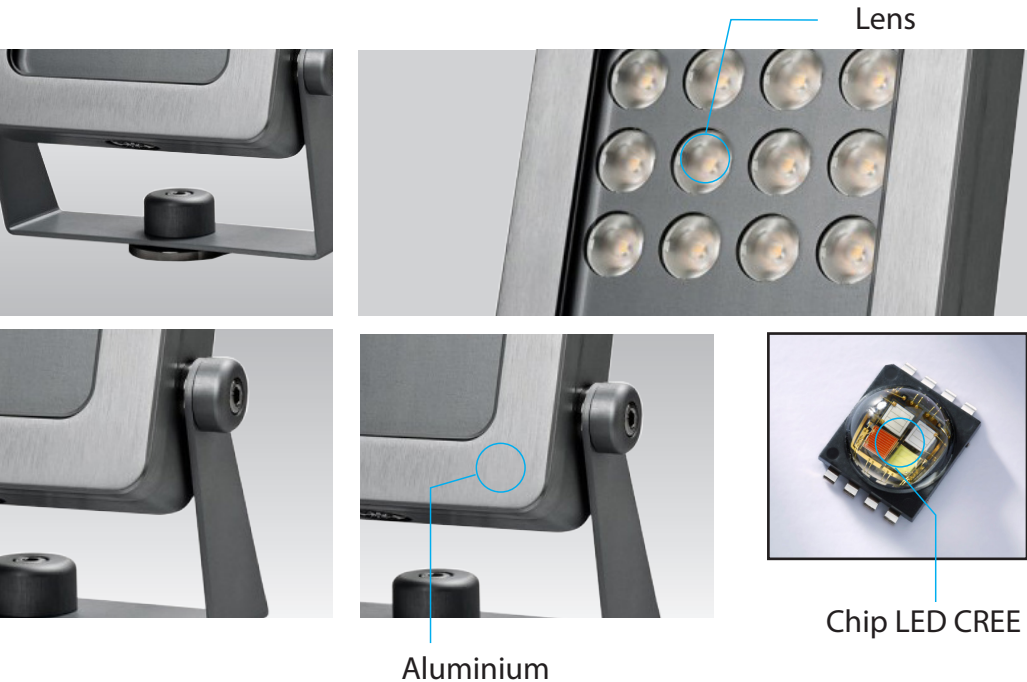



Legace

Select Color XX

Lens Clear

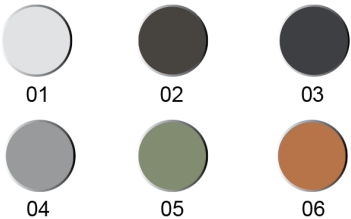

DIMENSIONS

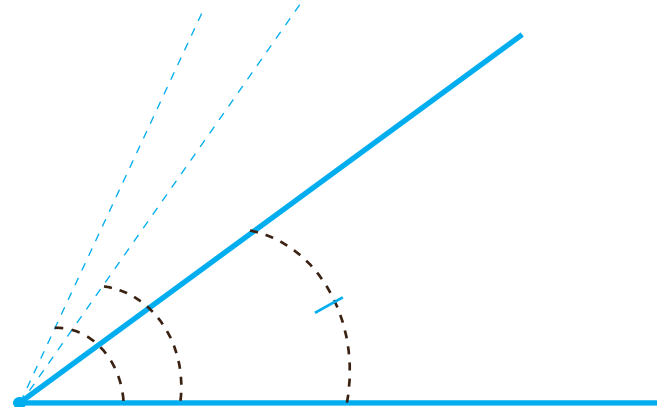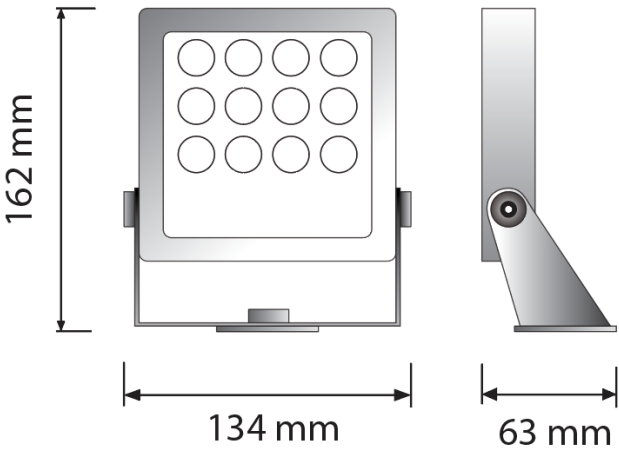


Beam Angle: 12° 24° 36° 50°

LED FLOODLIGHT 36W


04

SPECIFICATION

PHOTOMETRIC CURVE BEAM 36° AMPLITUDE DIAGRAM

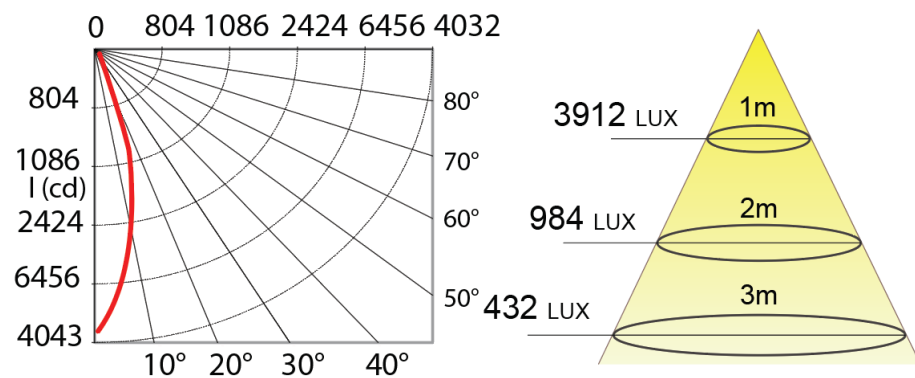

INSTALLATION

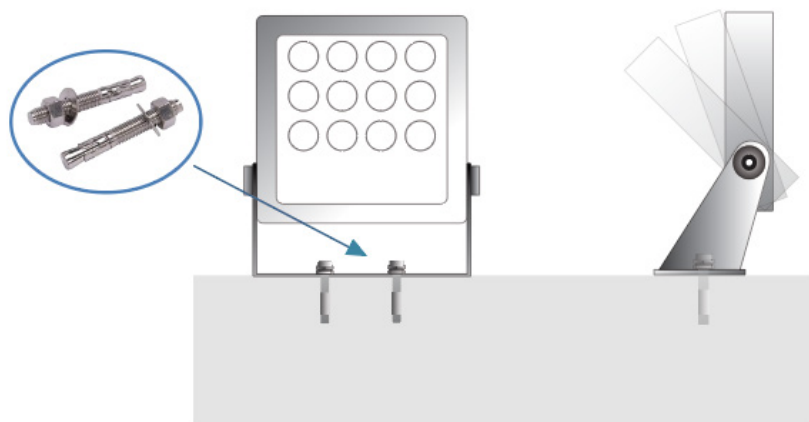


CONNECTOR IP68



LED FLOODLIGHT 36W

05


POWER SUPPLIES - INPUT VOTAGE

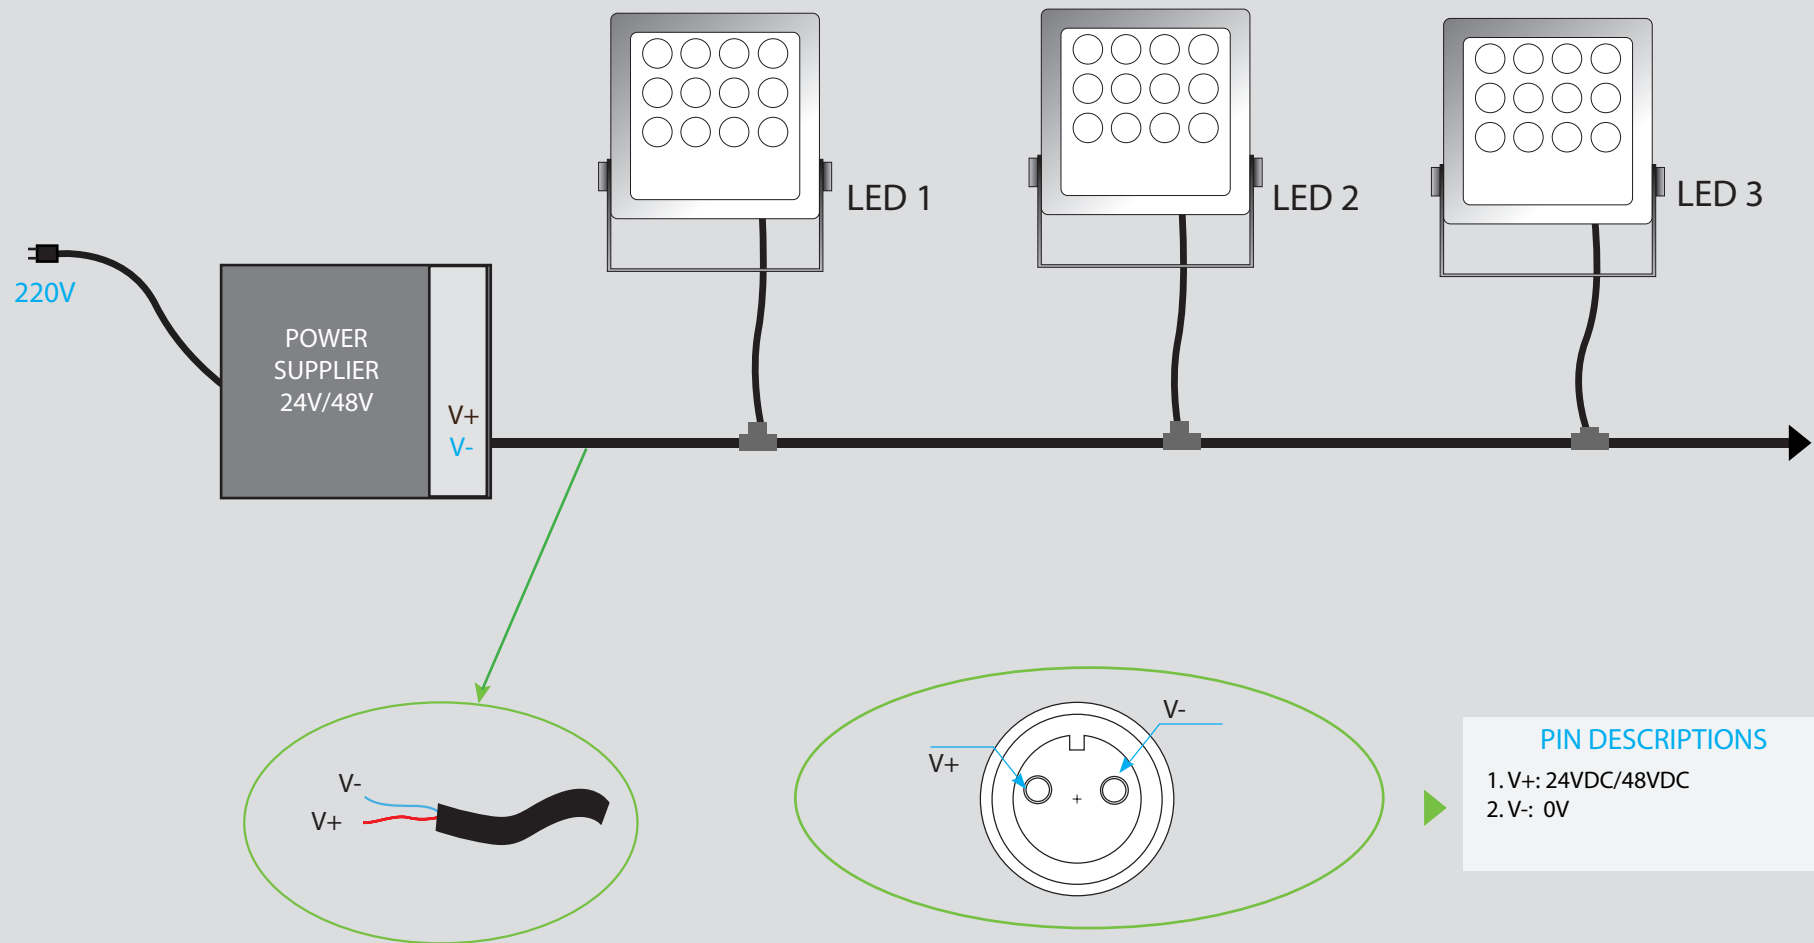

LED FLOODLIGHT 36W

06


DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE & DECODER

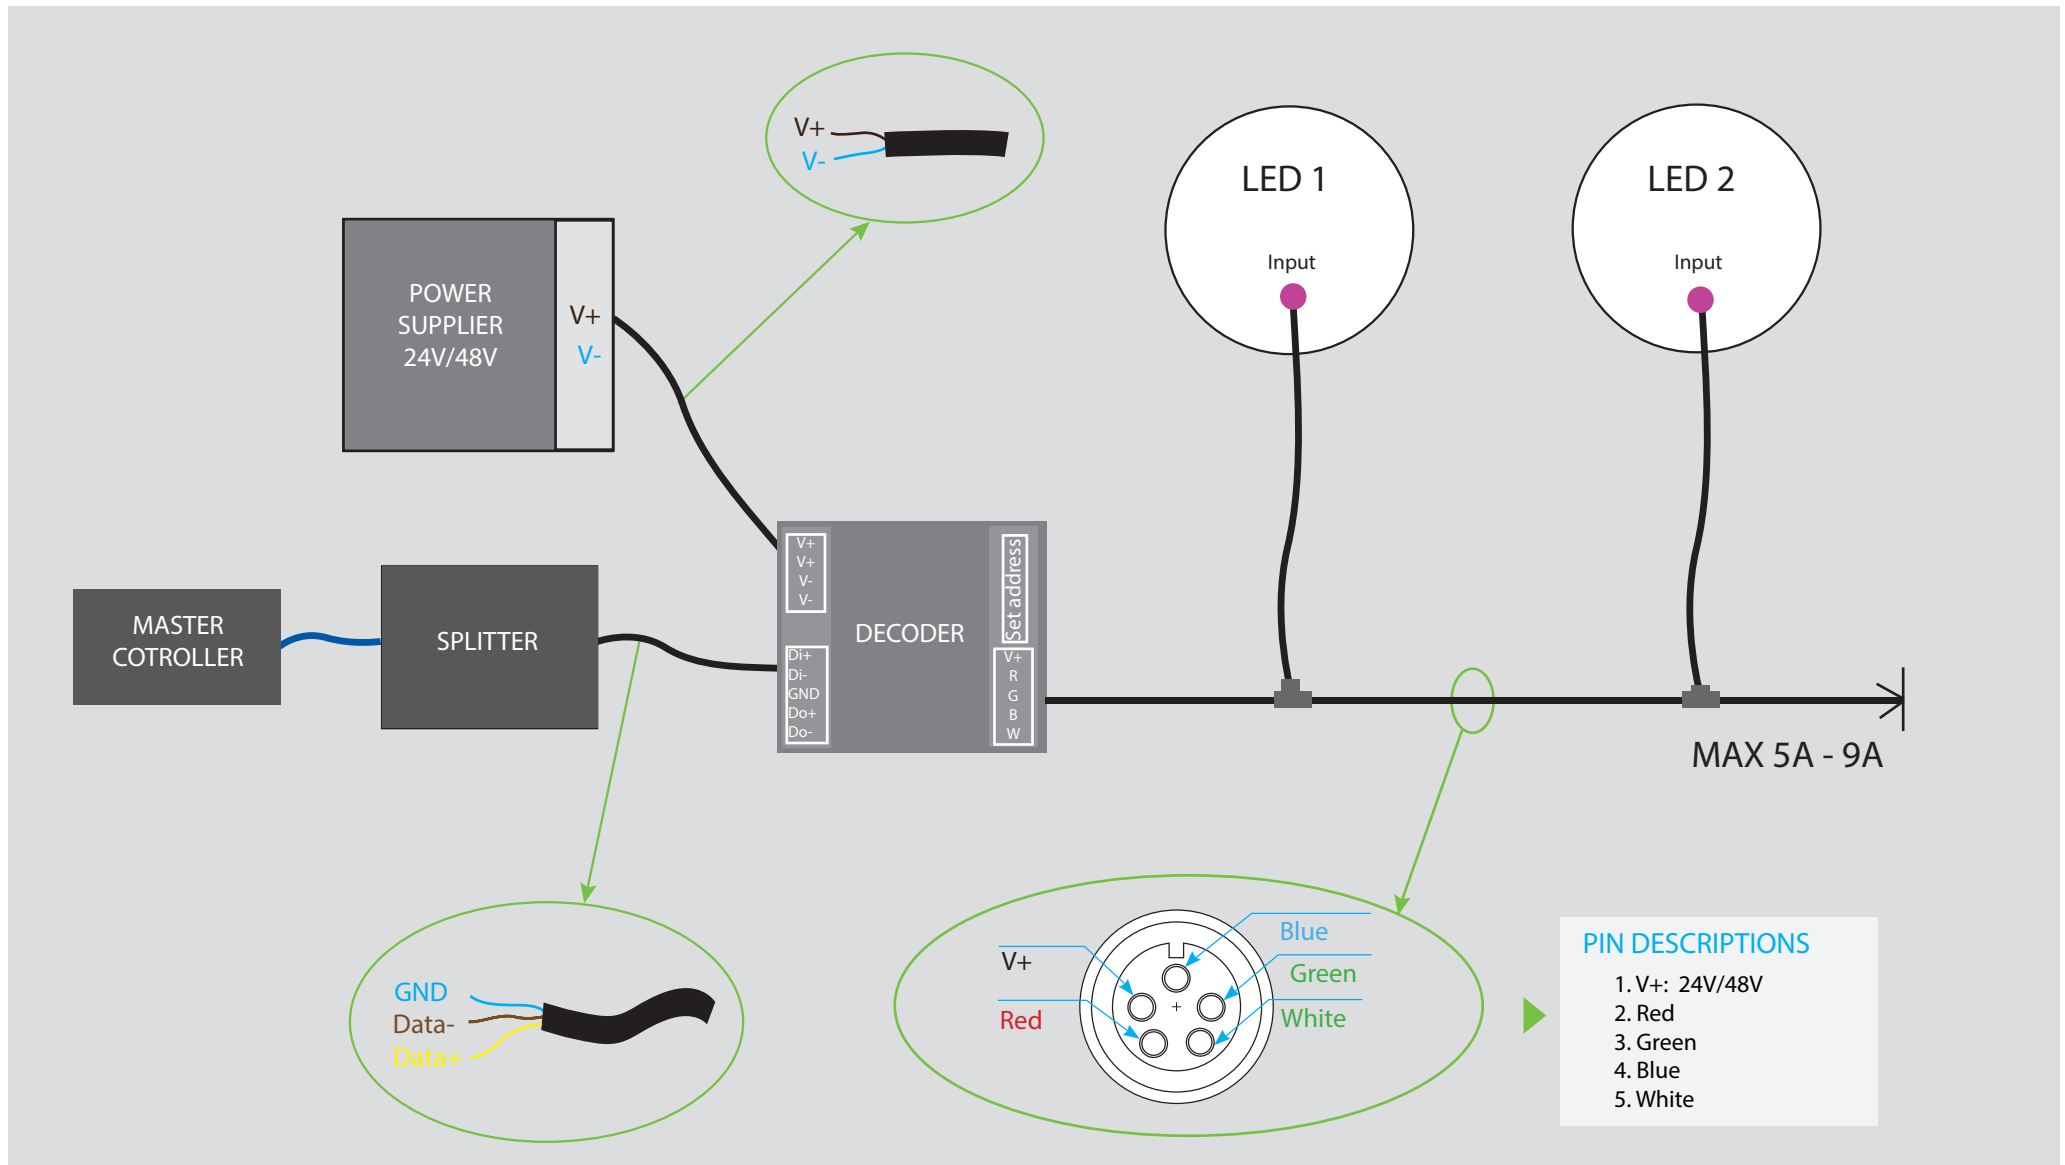

LED FLOODLIGHT 36W


07

DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE

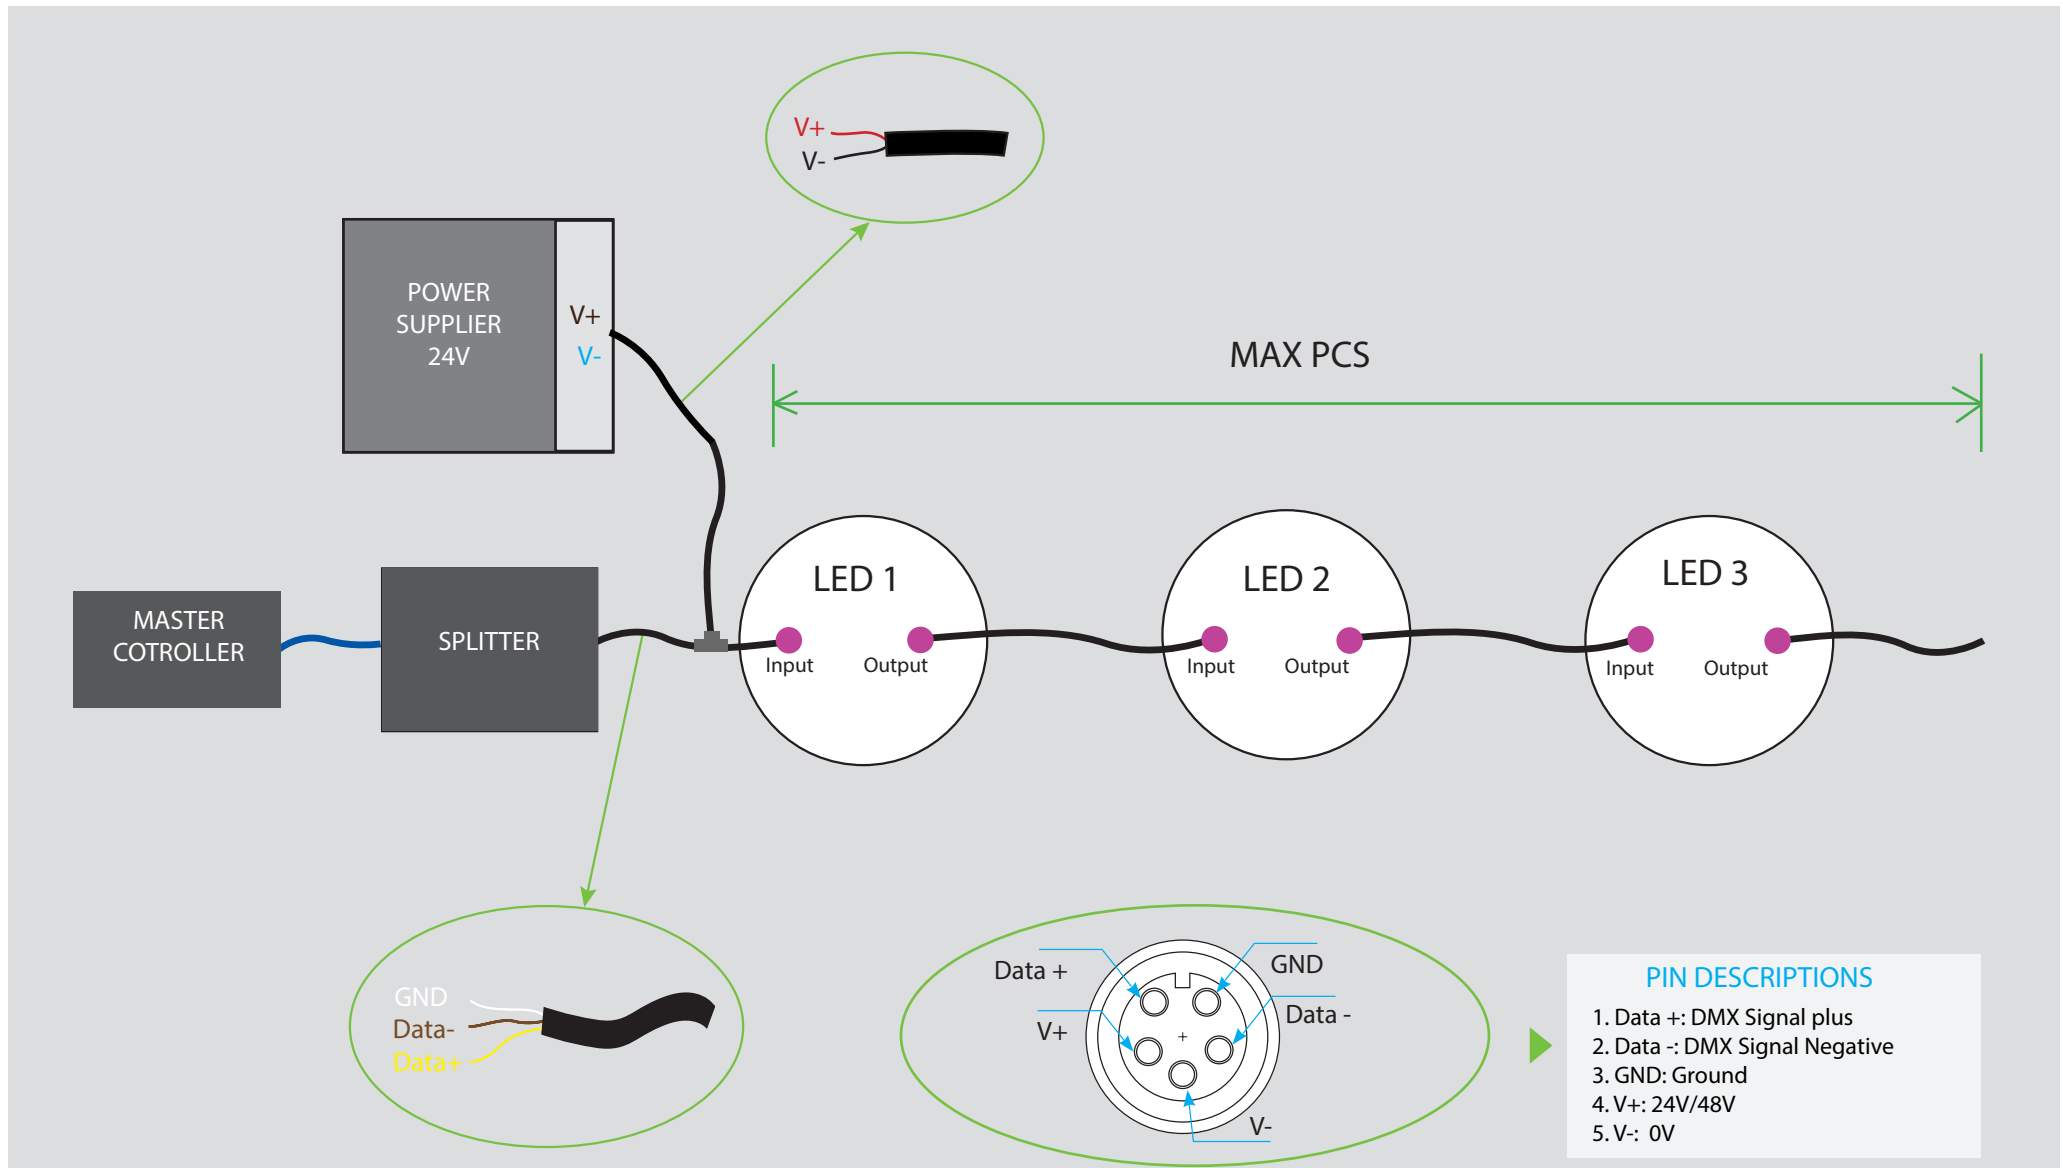

LED FLOODLIGHT 36W - Applications

08



OUTDOOR



LANDSCAPE



HOTEL/RESTAURANT



FACADE BUILDING



LED FLOODLIGHT 36W - Applications





THANKS FOR YOUR
ATTENTION