





LED BOLLARD LIGHT 6W - SERIES B2
PRODUCT OUTDOOR



LED BOLLARD LIGHT 6W

SPECCIFICATION

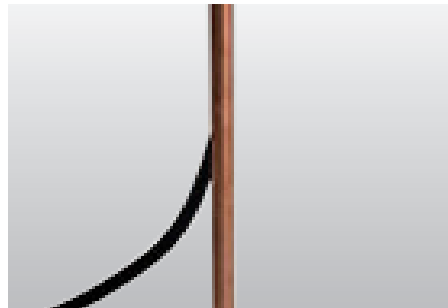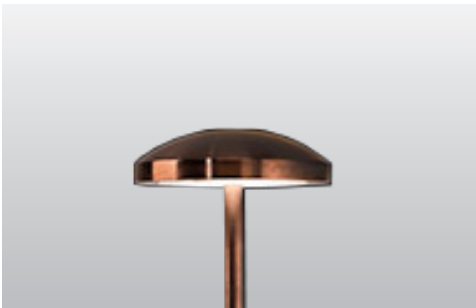

SPECCIFICATION


- Order Code: BB2006
- Input Voltage: 24VDC, 220V
- Dimension: Ø100xH1300 mm
- Chip LED: CREE
- Power consumption: 6W
- Lumen Output: 540 lm
- Material: Aluminium & Stainless Steel
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color[CRI]: 3000K, 4000k, 5000k
- Beam angle: 360°
- IP Rating: IP67
- Impact Resistance IK: IK06
- Life time: 50.000 hour
- Control: ON/OFF, DIM 0 - 10V, DALI, DMX512
- Standards:
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires




LED BOLLARD LIGHT 6W

TECHNICAL DETAILS


TECHNICAL DETAILS

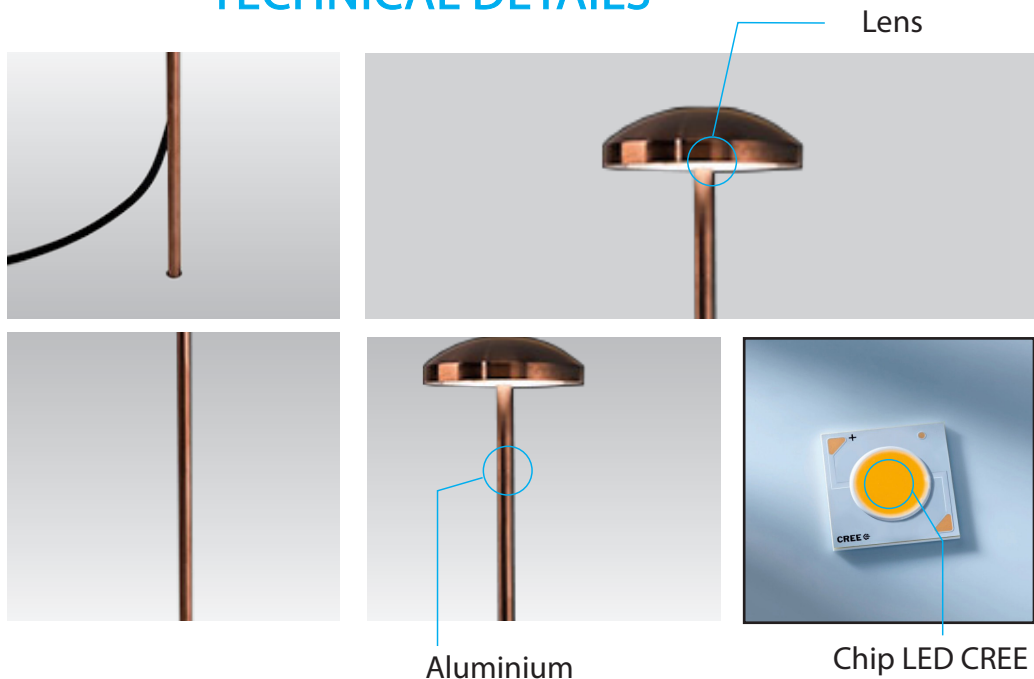


DIAGRAMS

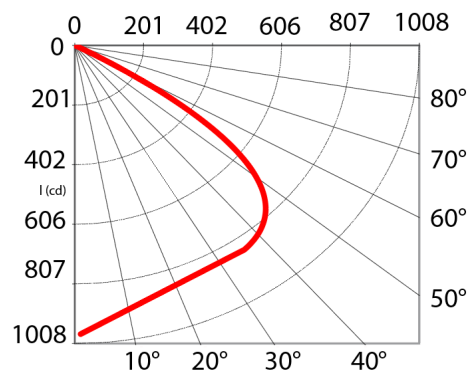

Select Color XX

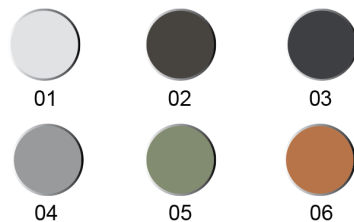


DIMENSIONS

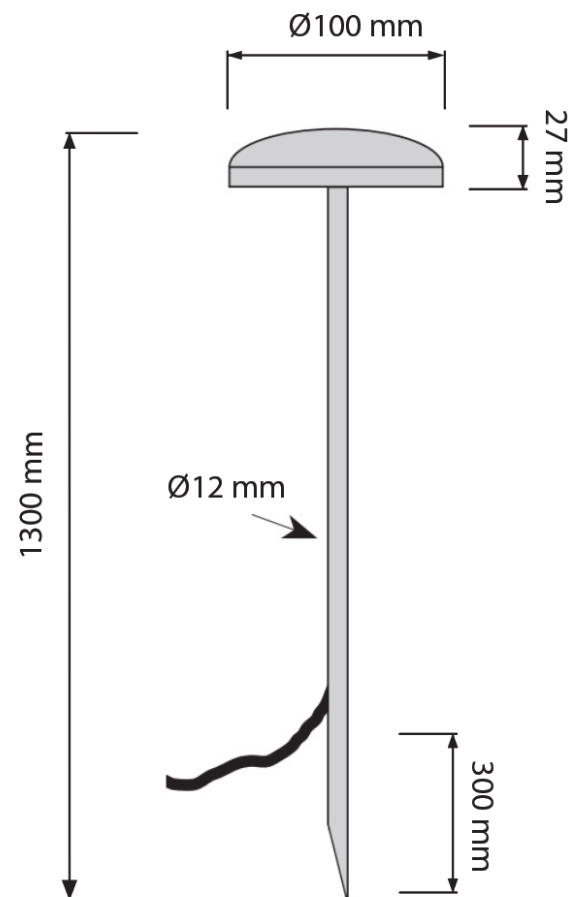


LED BOLLARD LIGHT 6W

POWER SUPPLIES - INPUT VOTAGE

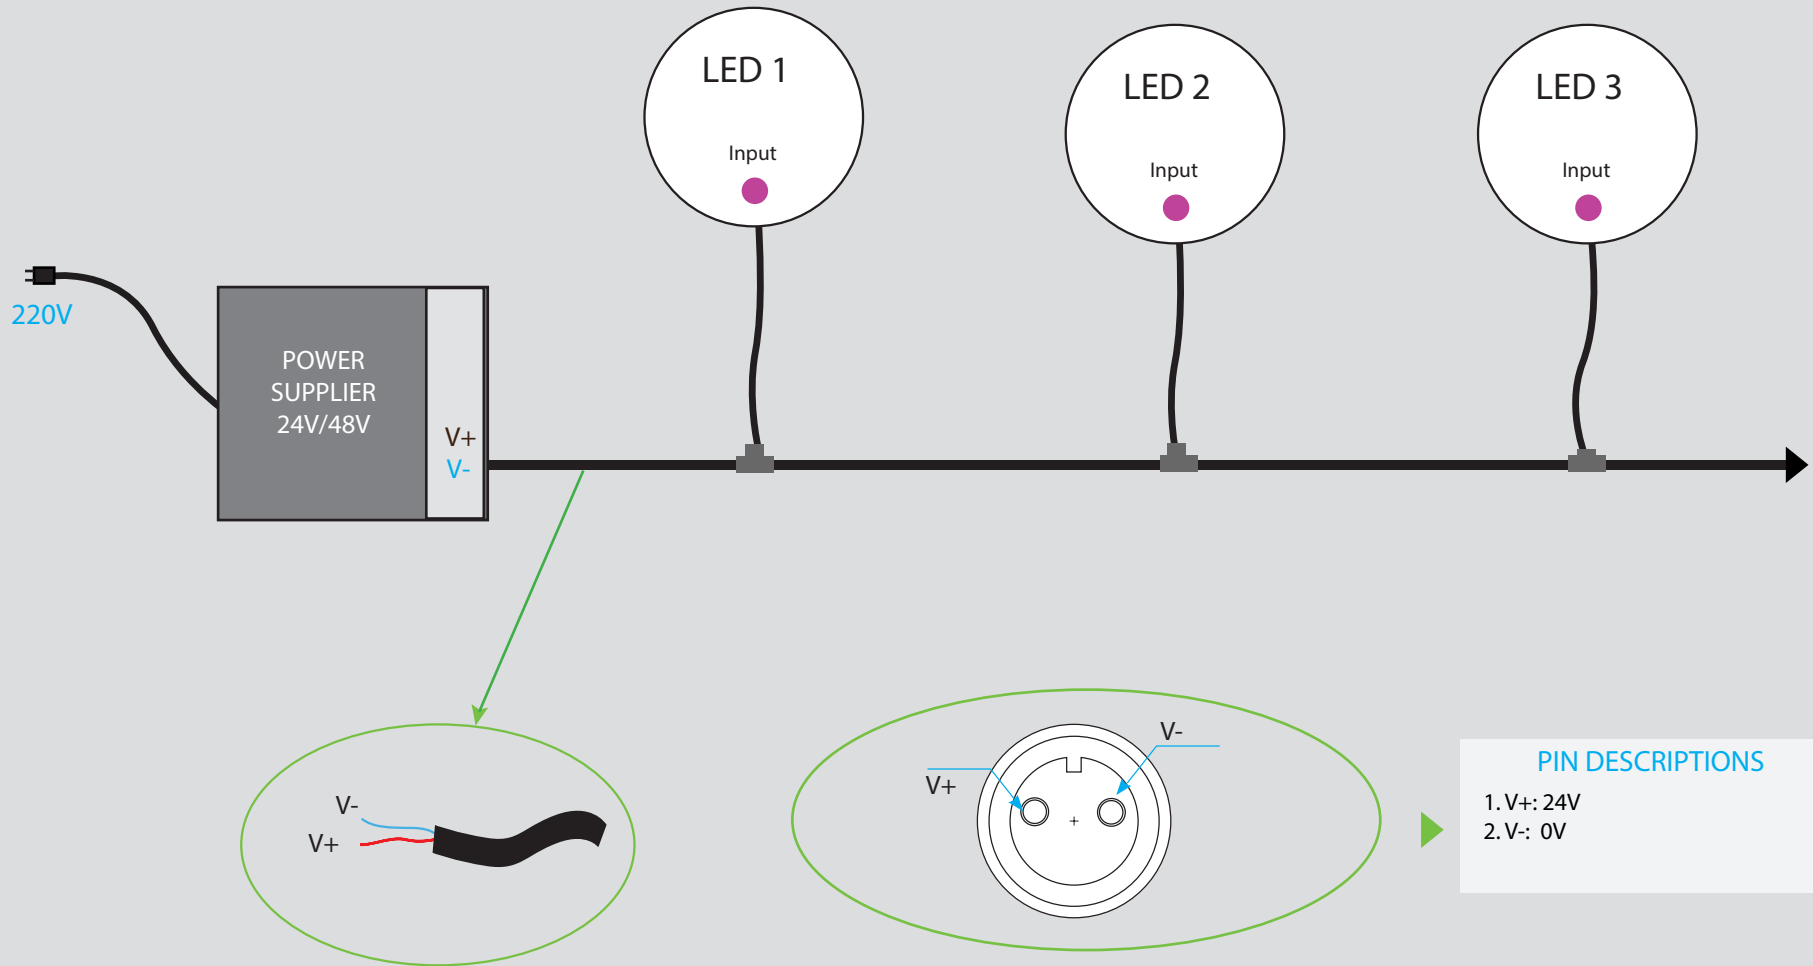

LED BOLLARD LIGHT 6W - Applications



OUTDOOR



LANDSCAPE



HOTEL/RESTAURANT



FACADE BUILDING



LED BOLLARD LIGHT 6W - Applications





THANKS FOR YOUR
ATTENTION