



LED SPOTLIGHT 12W - SERIES A
PRODUCT OUTDOOR



LED SPOTLIGHT 12W

SPECCIFICATION



SPECCIFICATION

- Order Code: SA012
- Input Voltage: 24VDC, 220V
- Dimension: Ø70xL115xH105 mm
- Chip LED: CREE
- Power consumption: 12W
- Luminous Flux: 1080lm at 3000K, 12W, CRI>90, 36°
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color: 3000K, 4000K, 5000K, RGBW
- CRI: >90
- Beam angle: 12° 24° 36° 50°
- IP Rating: IP68
- Life time: 50.000 hours
- Control: ON/OFF, DIM 0 - 10V, DALI, DMX512
- Standards:
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires



LED SPOTLIGHT 12W

TECHNICAL DETAILS



TECHNICAL DETAILS





Legace

Select Color XX

Lens Clear

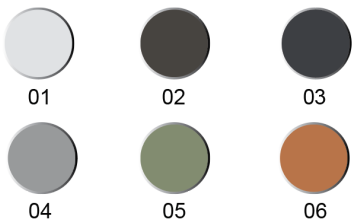

DIMENSIONS


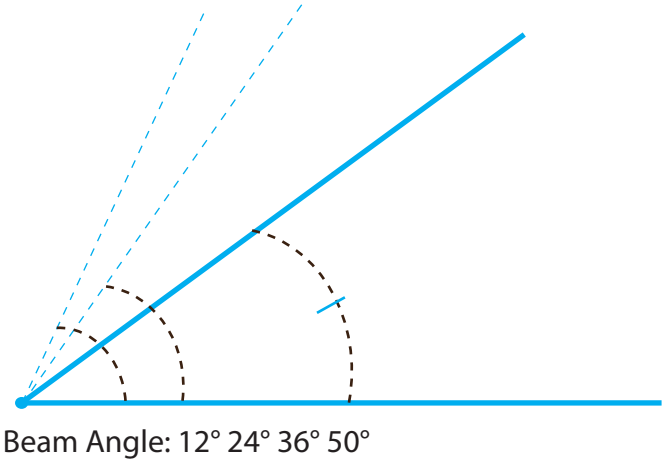
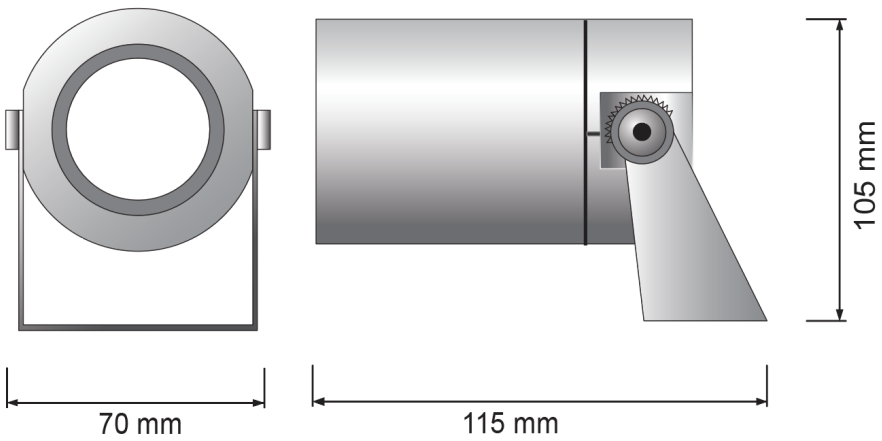


LED SPOTLIGHT 12W

04

SPECIFICATION


PHOTOMETRIC CURVE BEAM 36° AMPLITUDE DIAGRAM

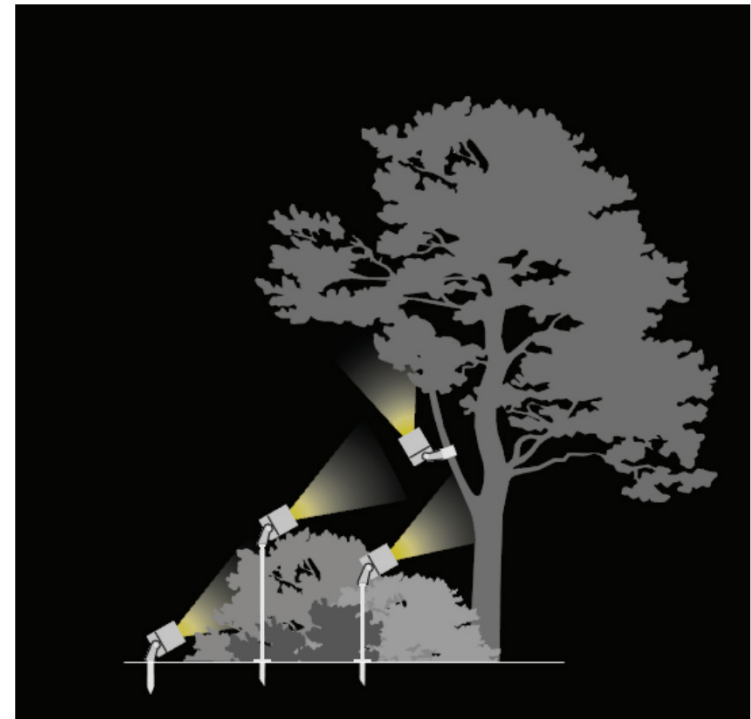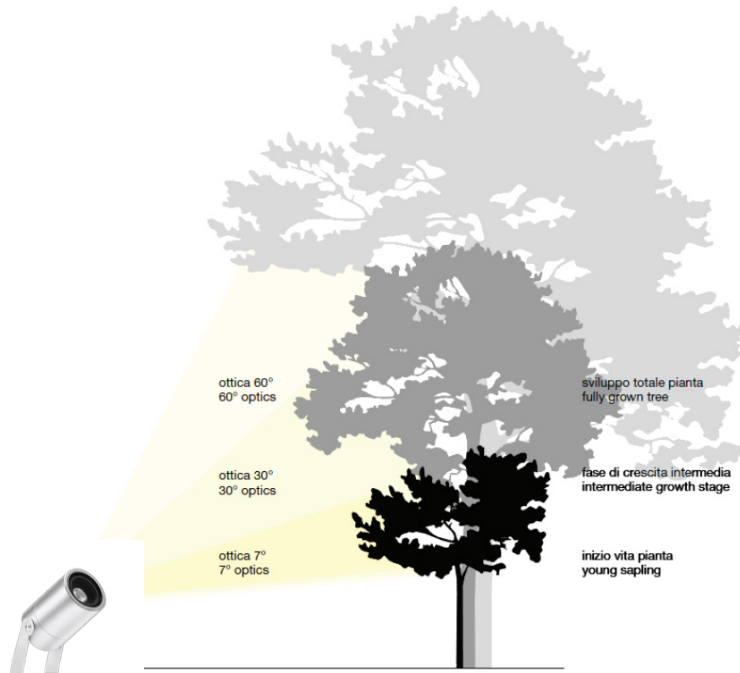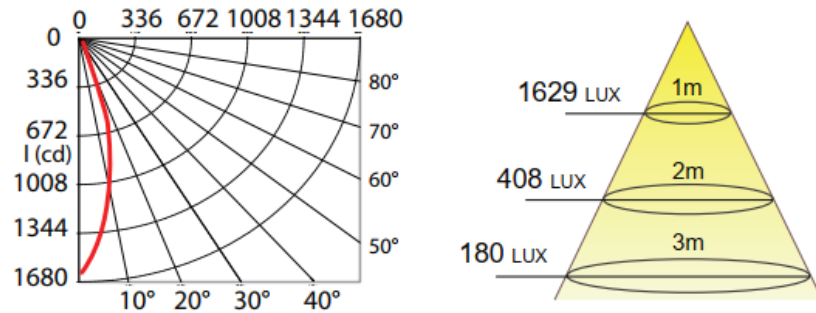

LED SPOTLIGHT 12W


05

POWER SUPPLIES - INPUT VOTAGE

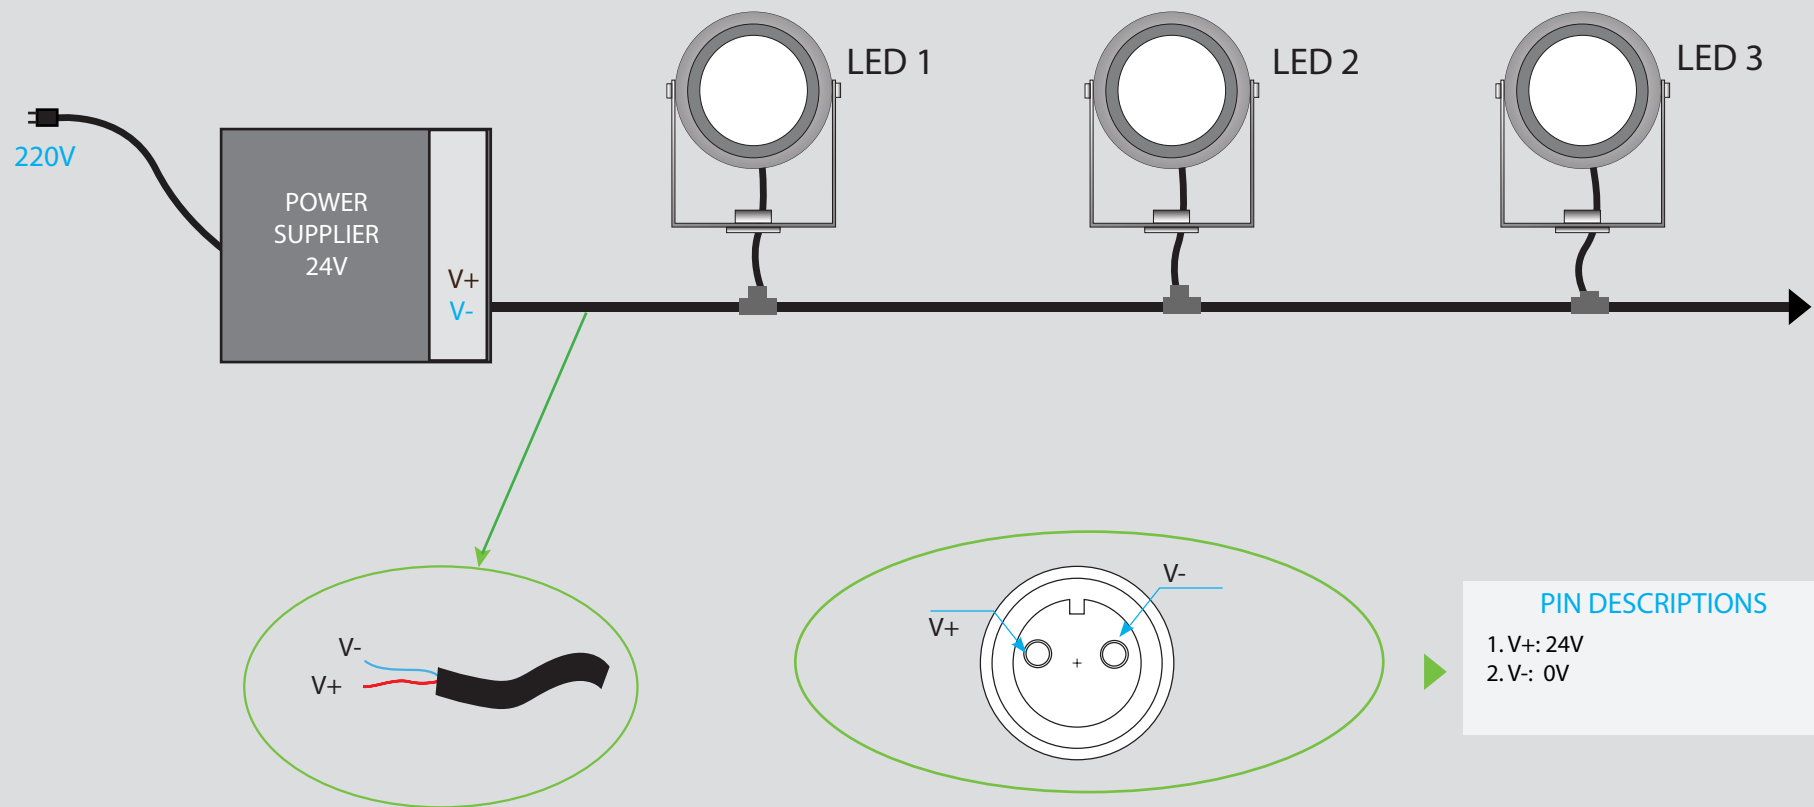


LED SPOTLIGHT 12W

DIAGRAM CONNECTOR - DMX PROTOCOL - 4 CORE & DECODER

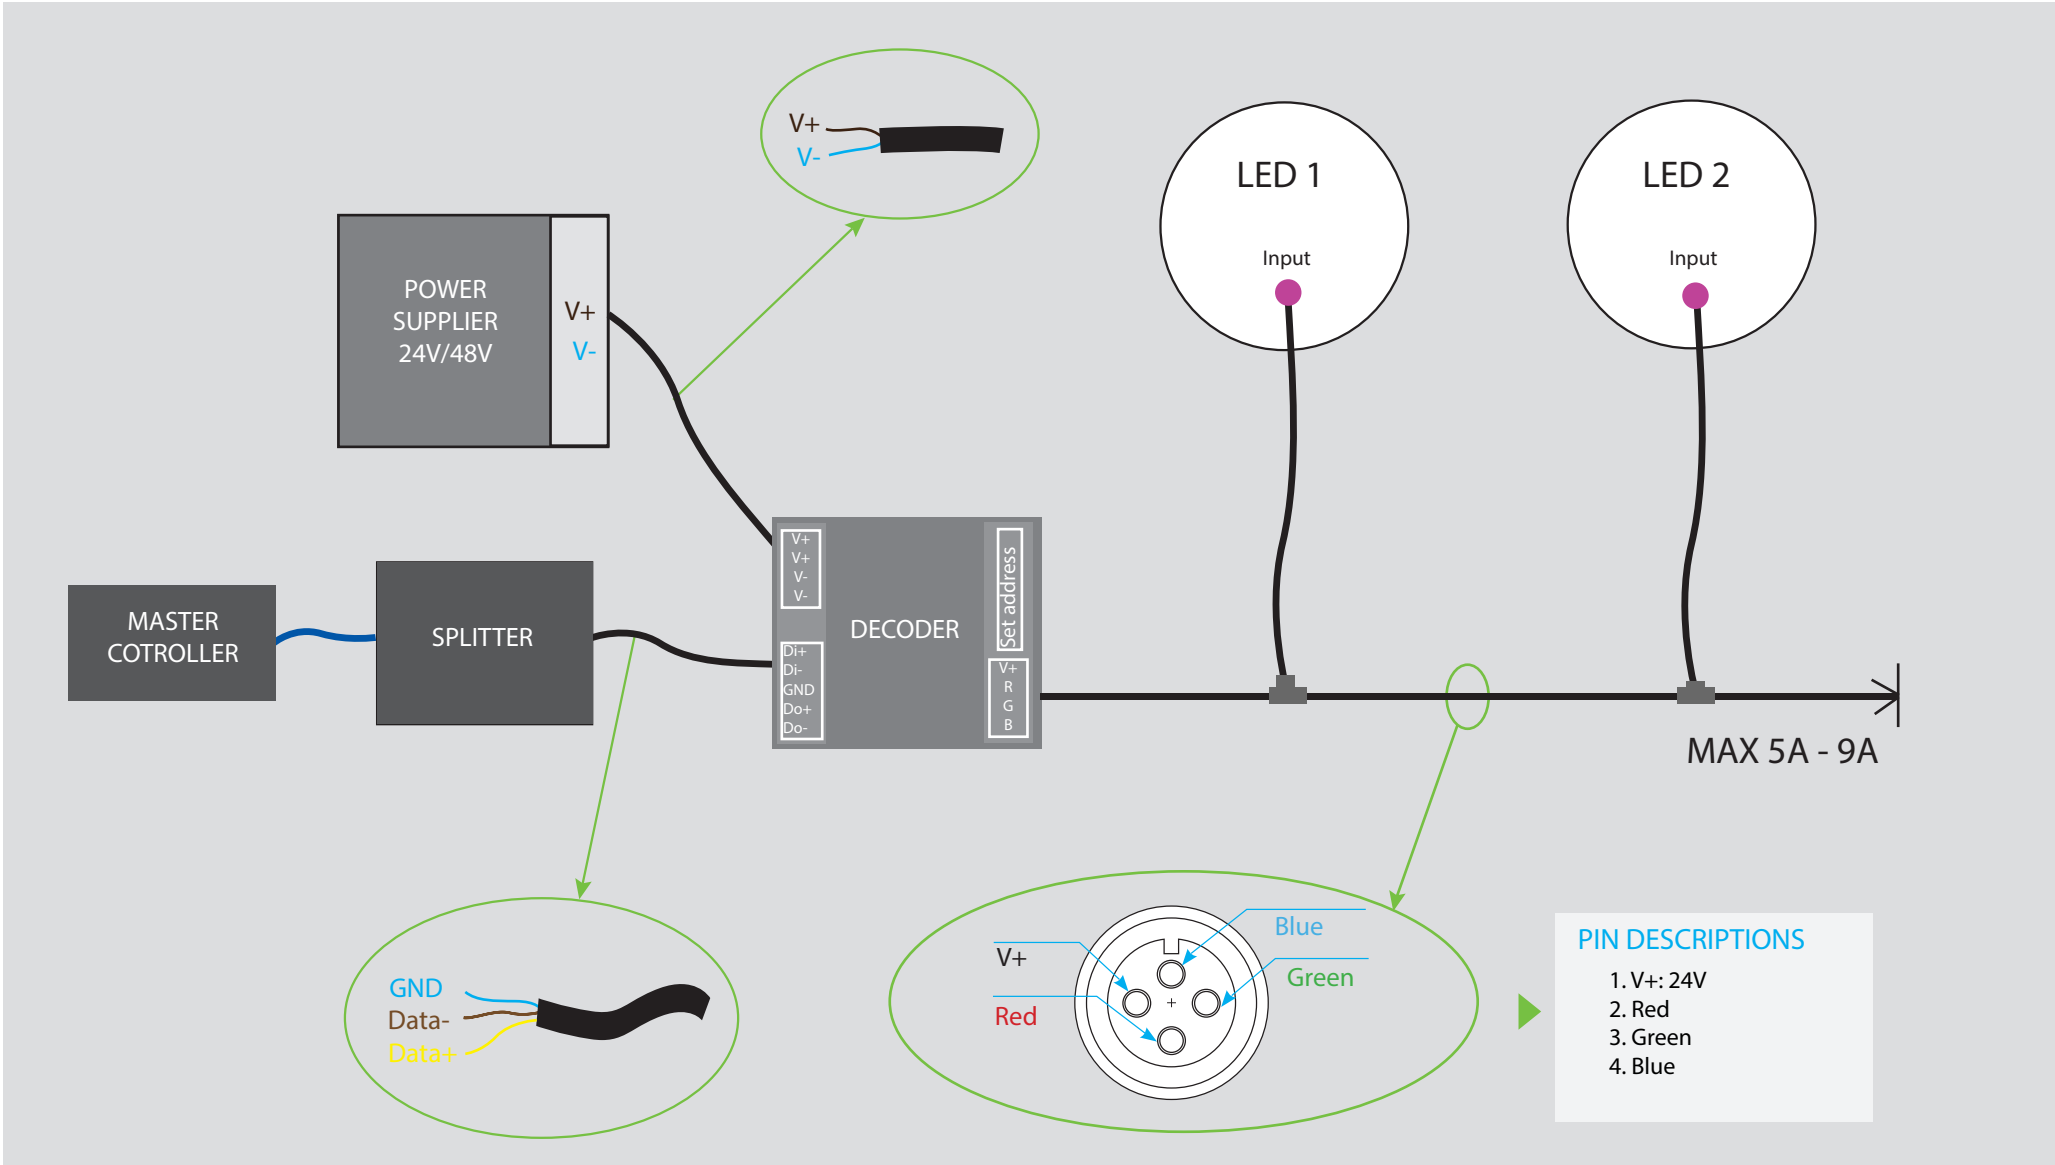


LED SPOTLIGHT 12W

DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE

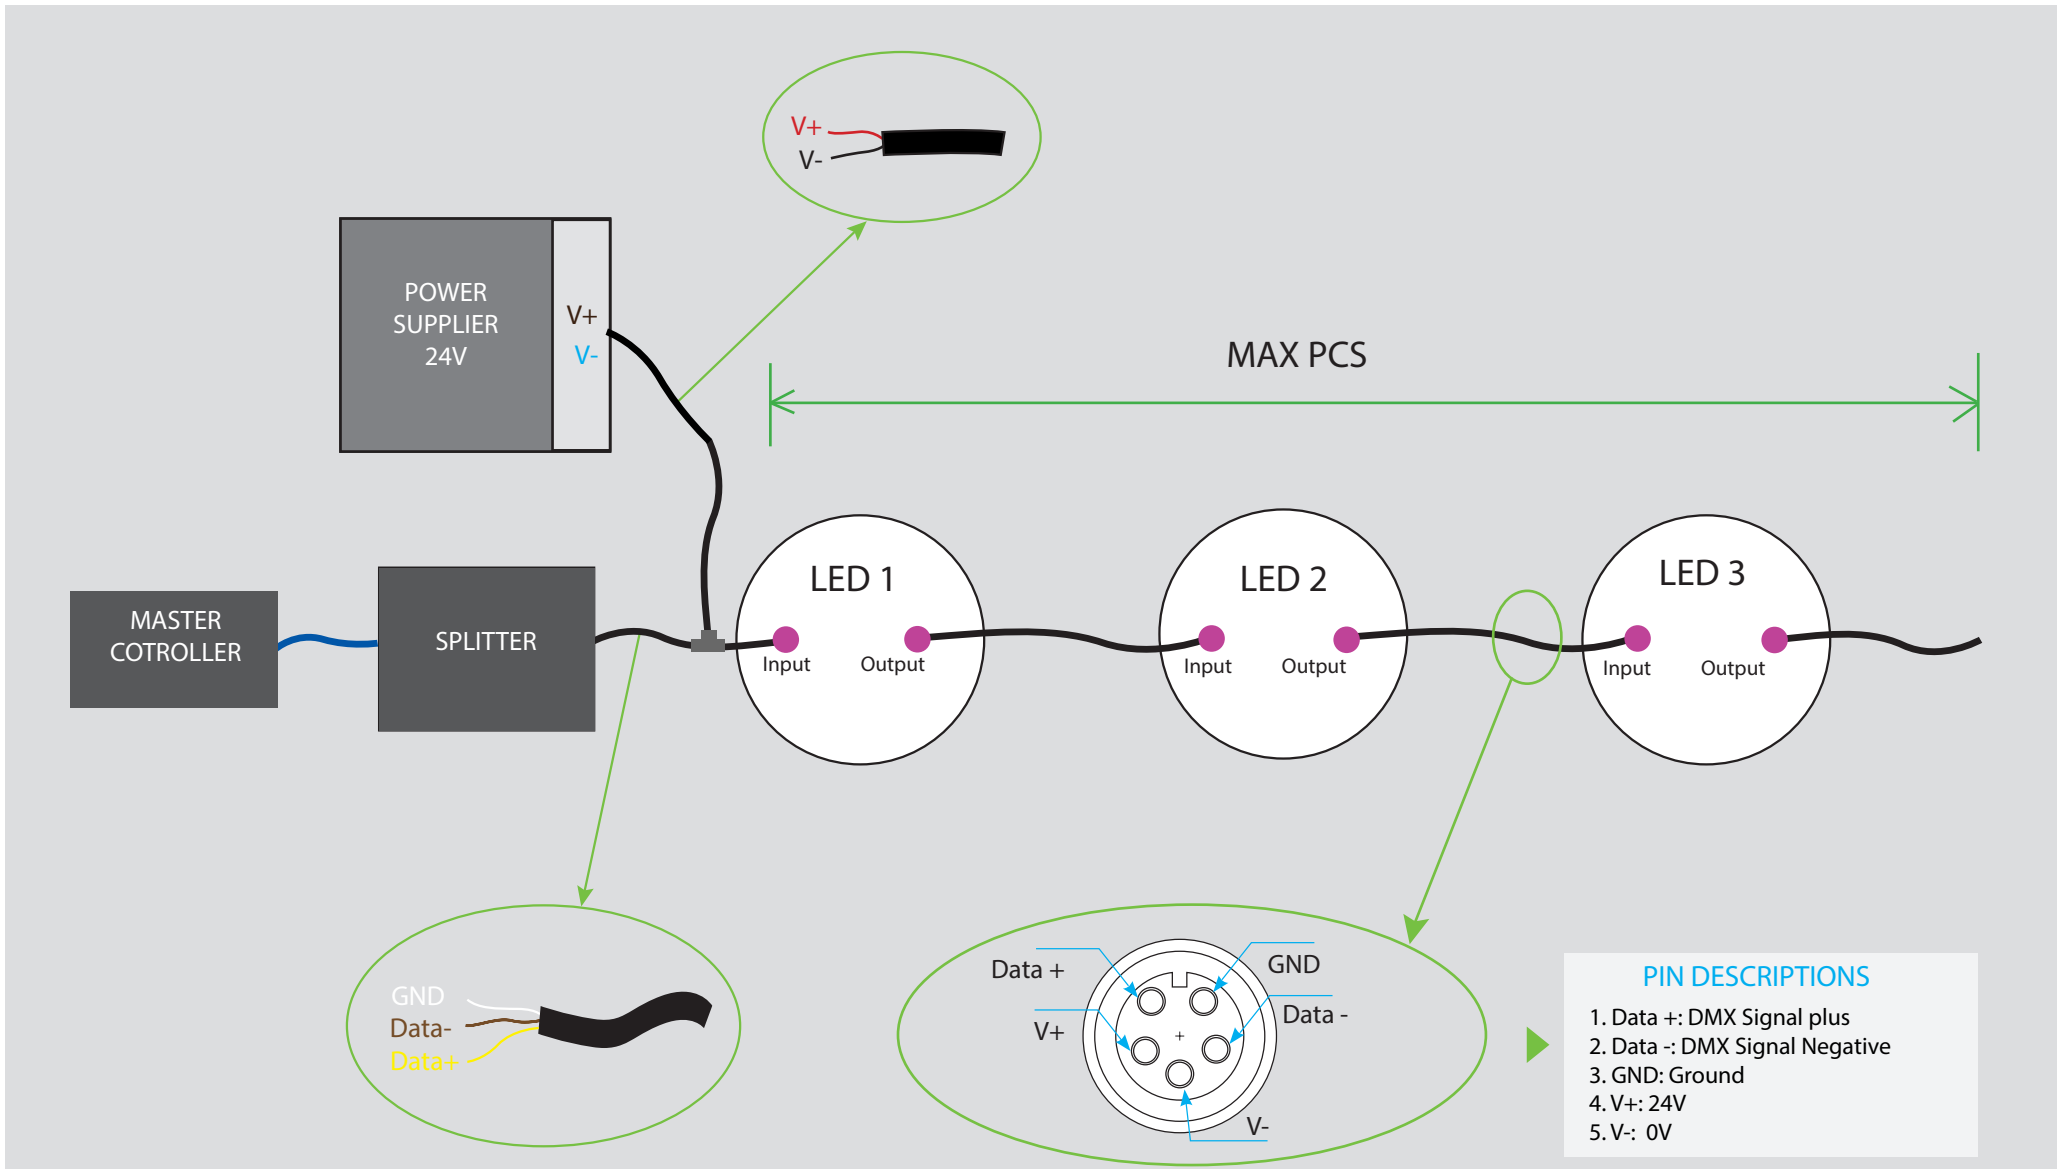

LED SPOTLIGHT 12W - Applications

08



OUTDOOR



LANDSCAPE



HOTEL/RESTAURANT



FACADE BUILDING



LED SPOTLIGHT 12W - Applications

09





THANKS FOR YOUR
ATTENTION