



LED FLOODLIGHT 45W - SERIES A  
PRODUCT OUTDOOR



# LED FLOODLIGHT 45W

## SPECCIFICATION



## SPECCIFICATION


- Order Code: FA045, FA045RGBW
- Input Voltage: 24VDC, 48VDC, 220VAC
- Dimension: L156xW63xH187 mm
- Chip LED: CREE
- Power consumption: 45W
- Lumen Output: 4050 lm
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color[CRI]: 3000K, 4000k, 5000k, RGBW
- CRI: >90
- Beam angle: 12° 24° 36° 50°
- IP Rating: IP68
- Life time: 50.000 hour
- Control: ON/OFF, DIM 0 - 10V, DALI, DMX512
- Standards:
  - + RoHS; EMC protection
  - + IEC 62031LED
  - + IEC 60598 Luminaires



# LED FLOODLIGHT 45W

## TECHNICAL DETAILS



### TECHNICAL DETAILS

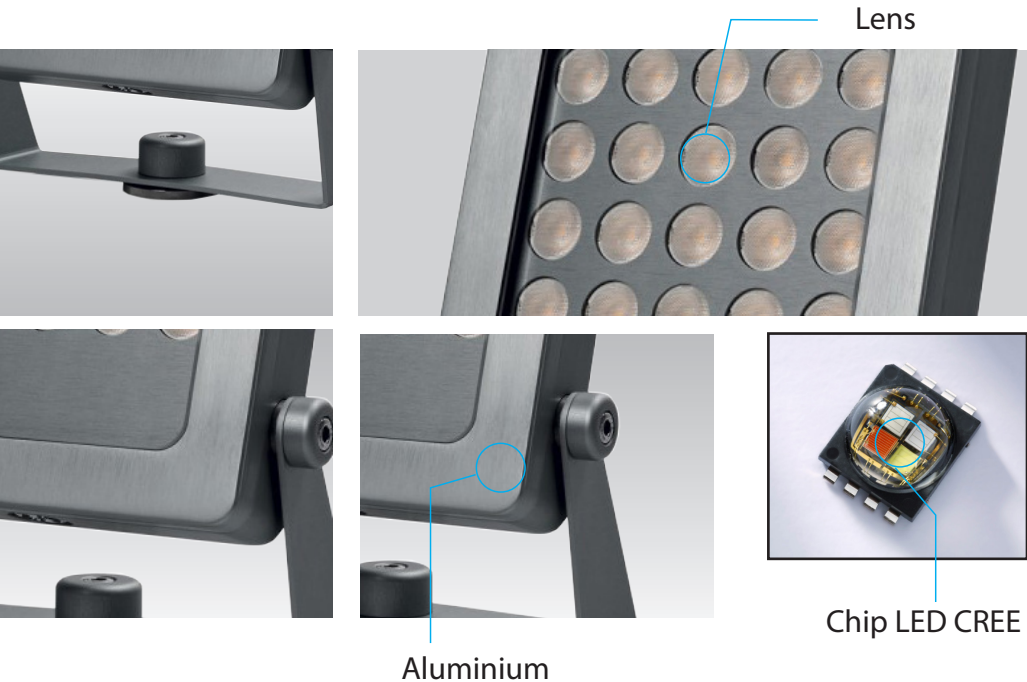



Legace

Select Color XX

Lens Clear

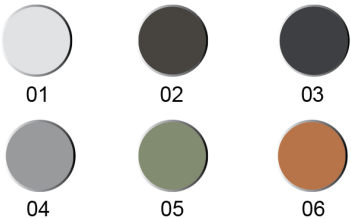

### DIMENSIONS

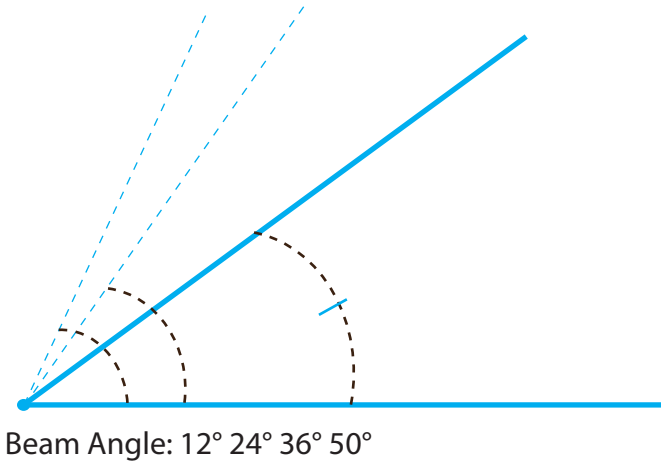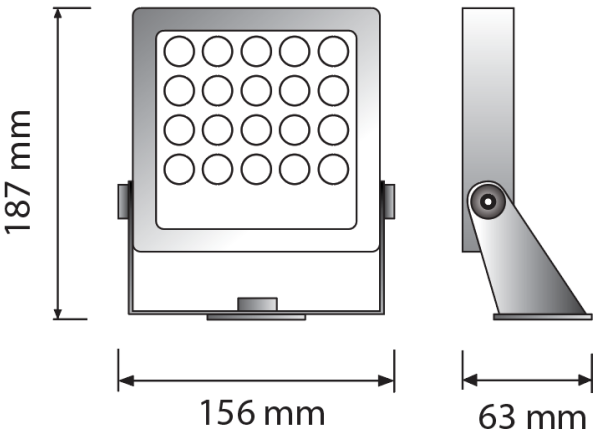


# LED FLOODLIGHT 45W


04

## SPECIFICATION


### PHOTOMETRIC CURVE BEAM 36° AMPLITUDE DIAGRAM

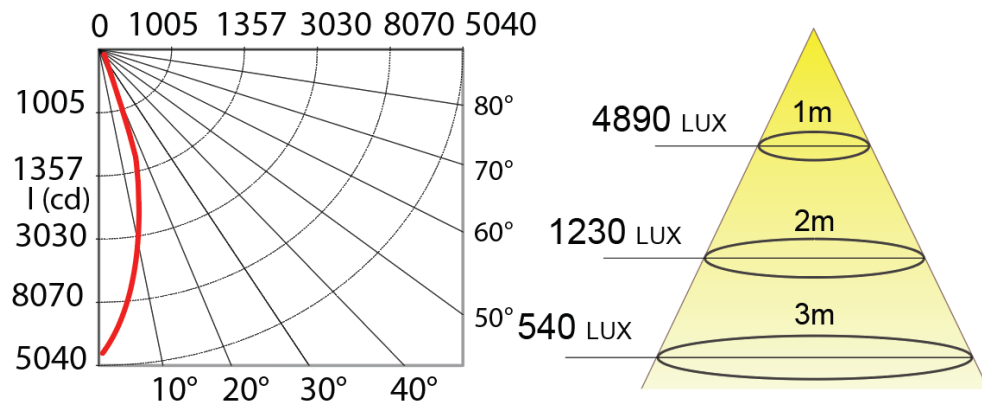

## INSTALLATION

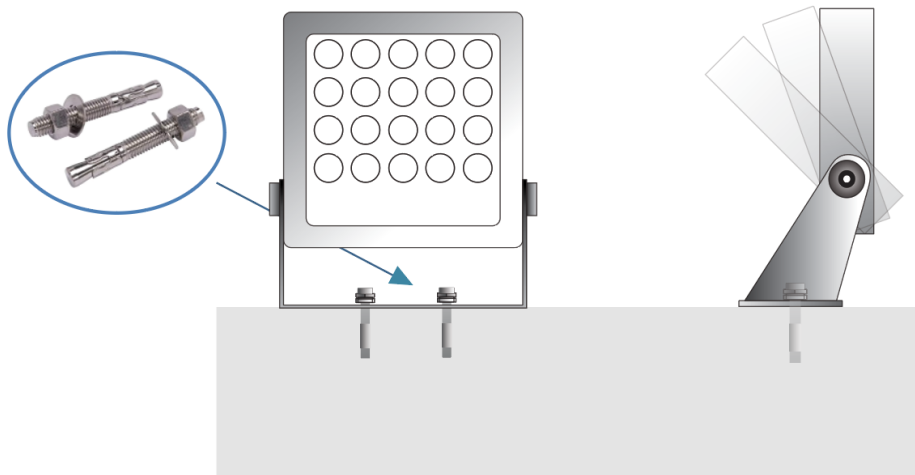


## CONNECTOR IP68

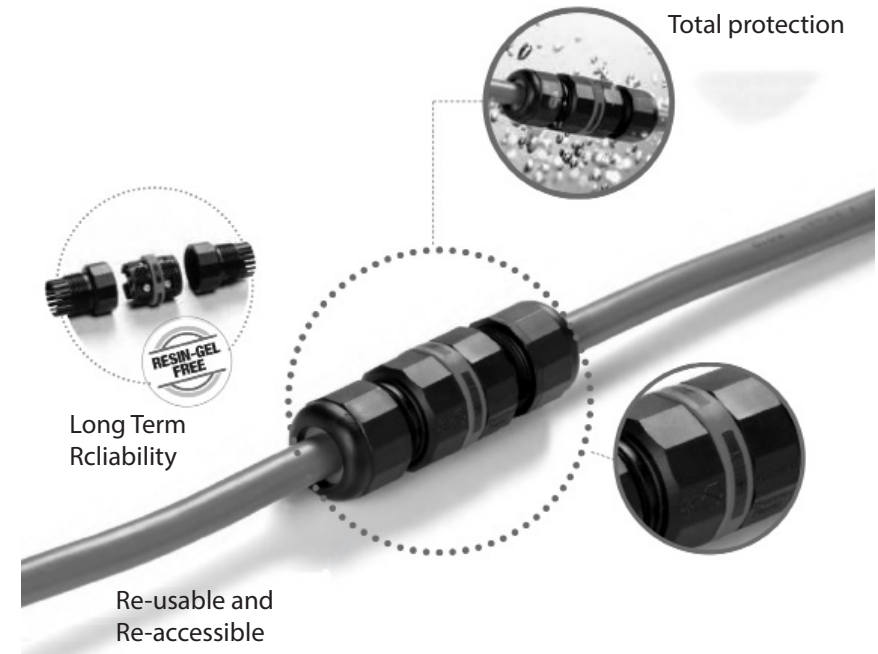

# LED FLOODLIGHT 45W

05


## POWER SUPPLIES - INPUT VOTAGE

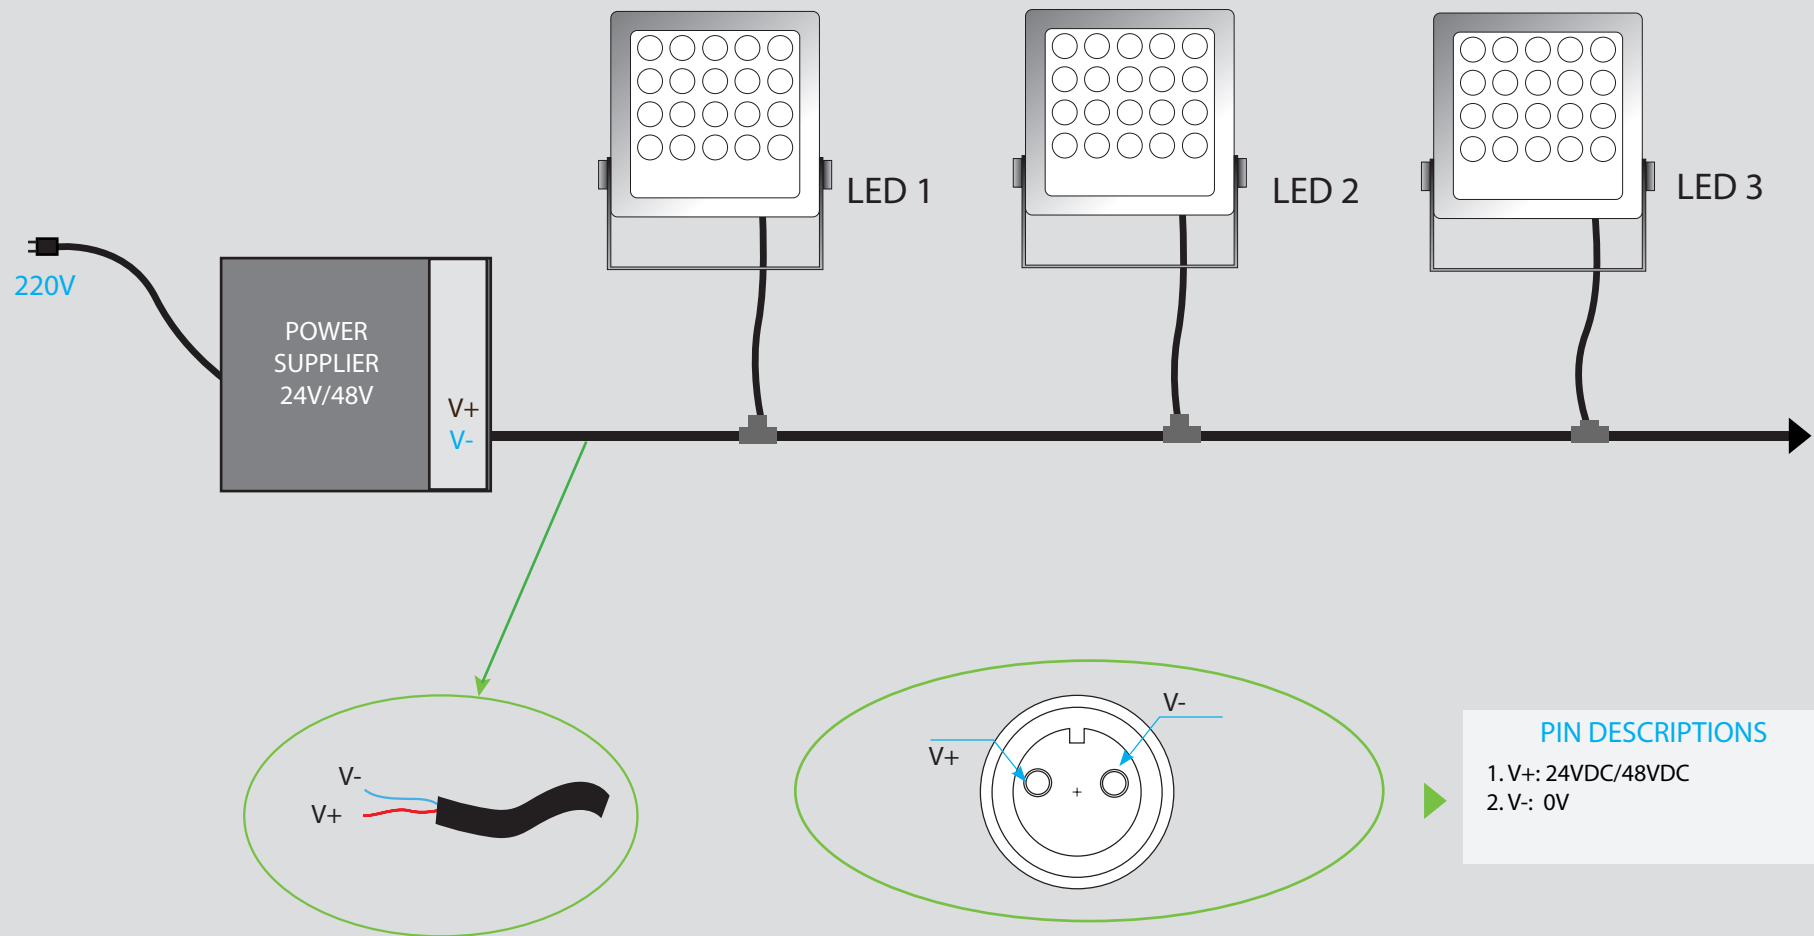

# LED FLOODLIGHT 45W

06


## DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE & DECODER

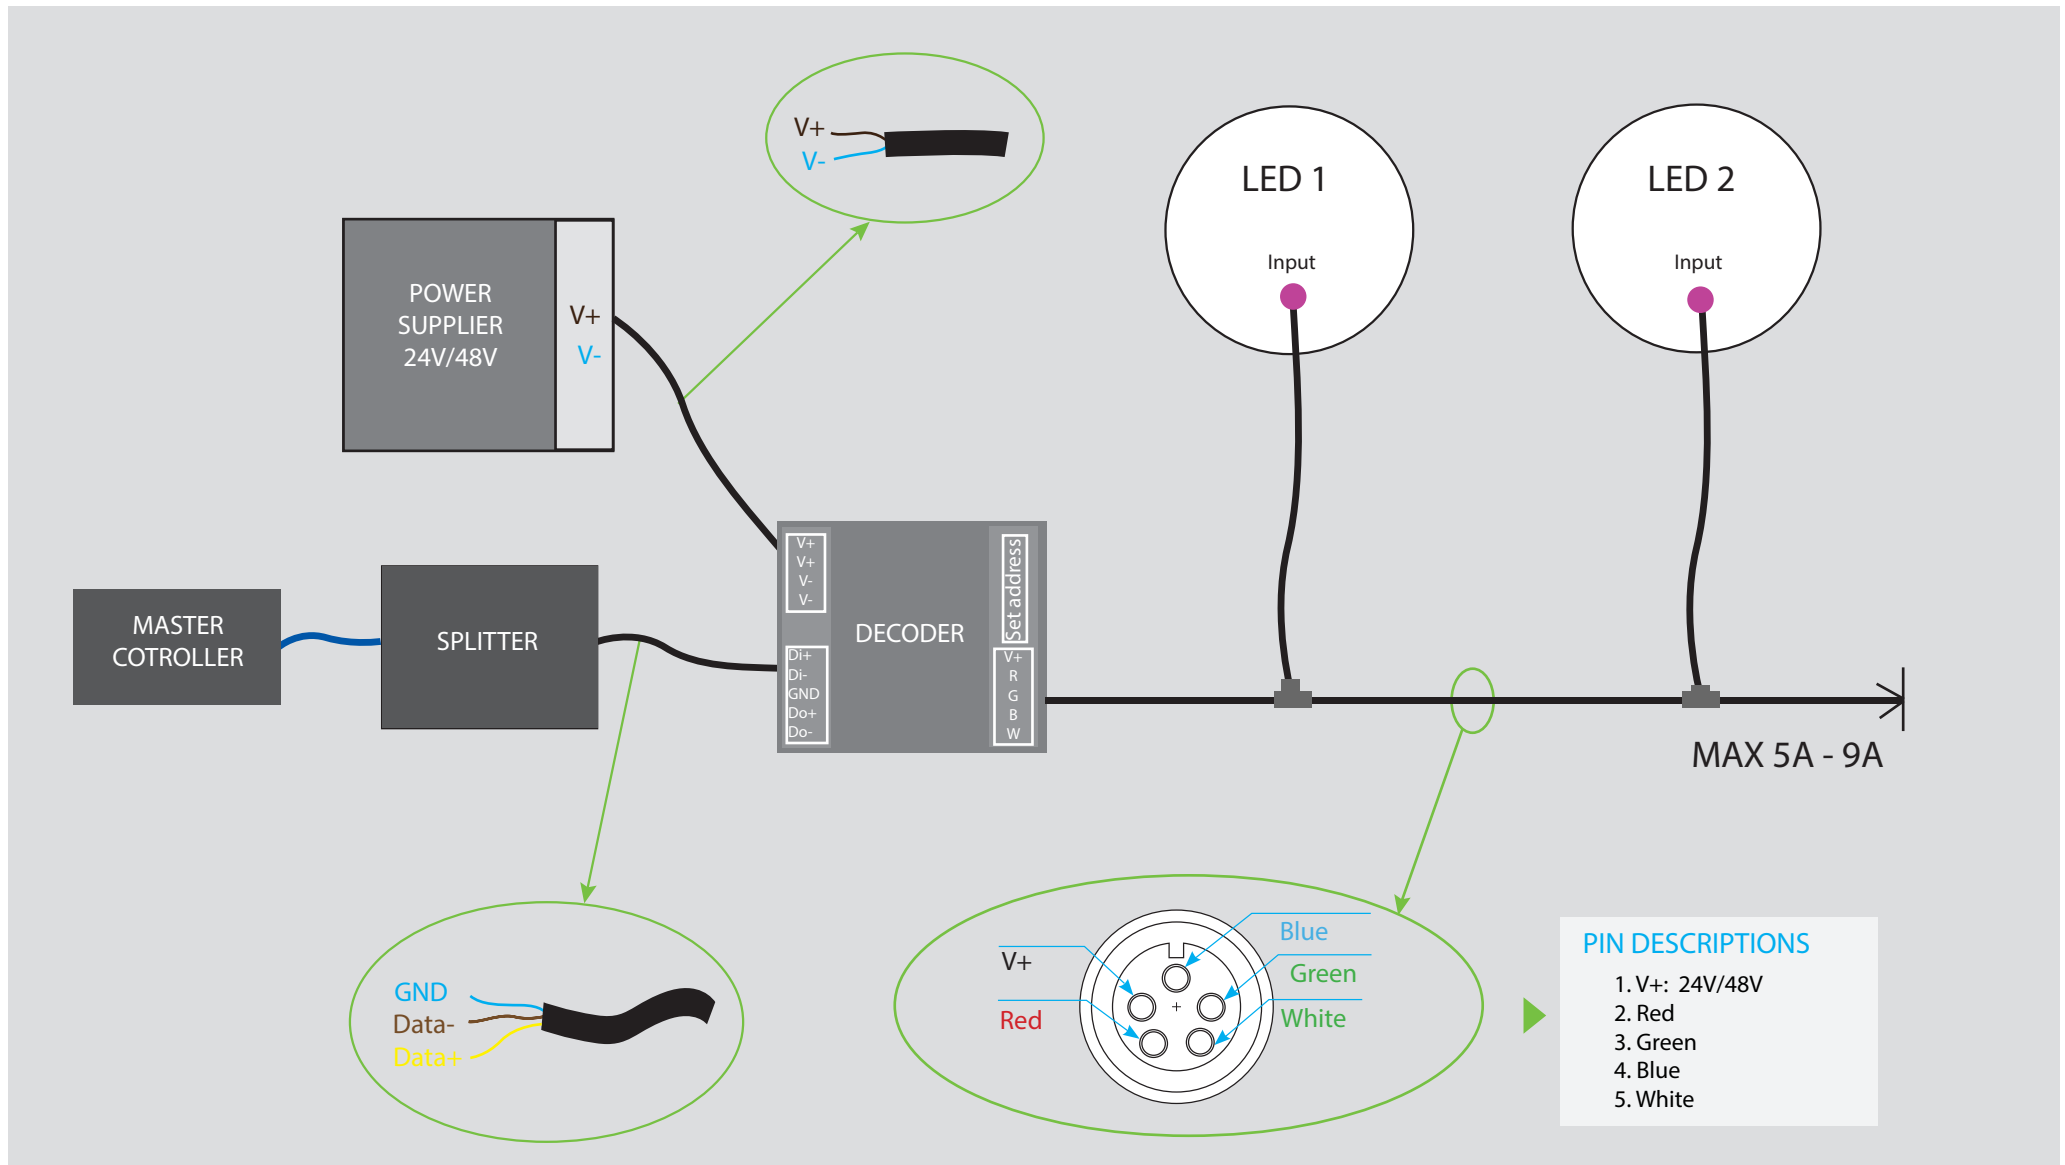

# LED FLOODLIGHT 45W


07

## DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE

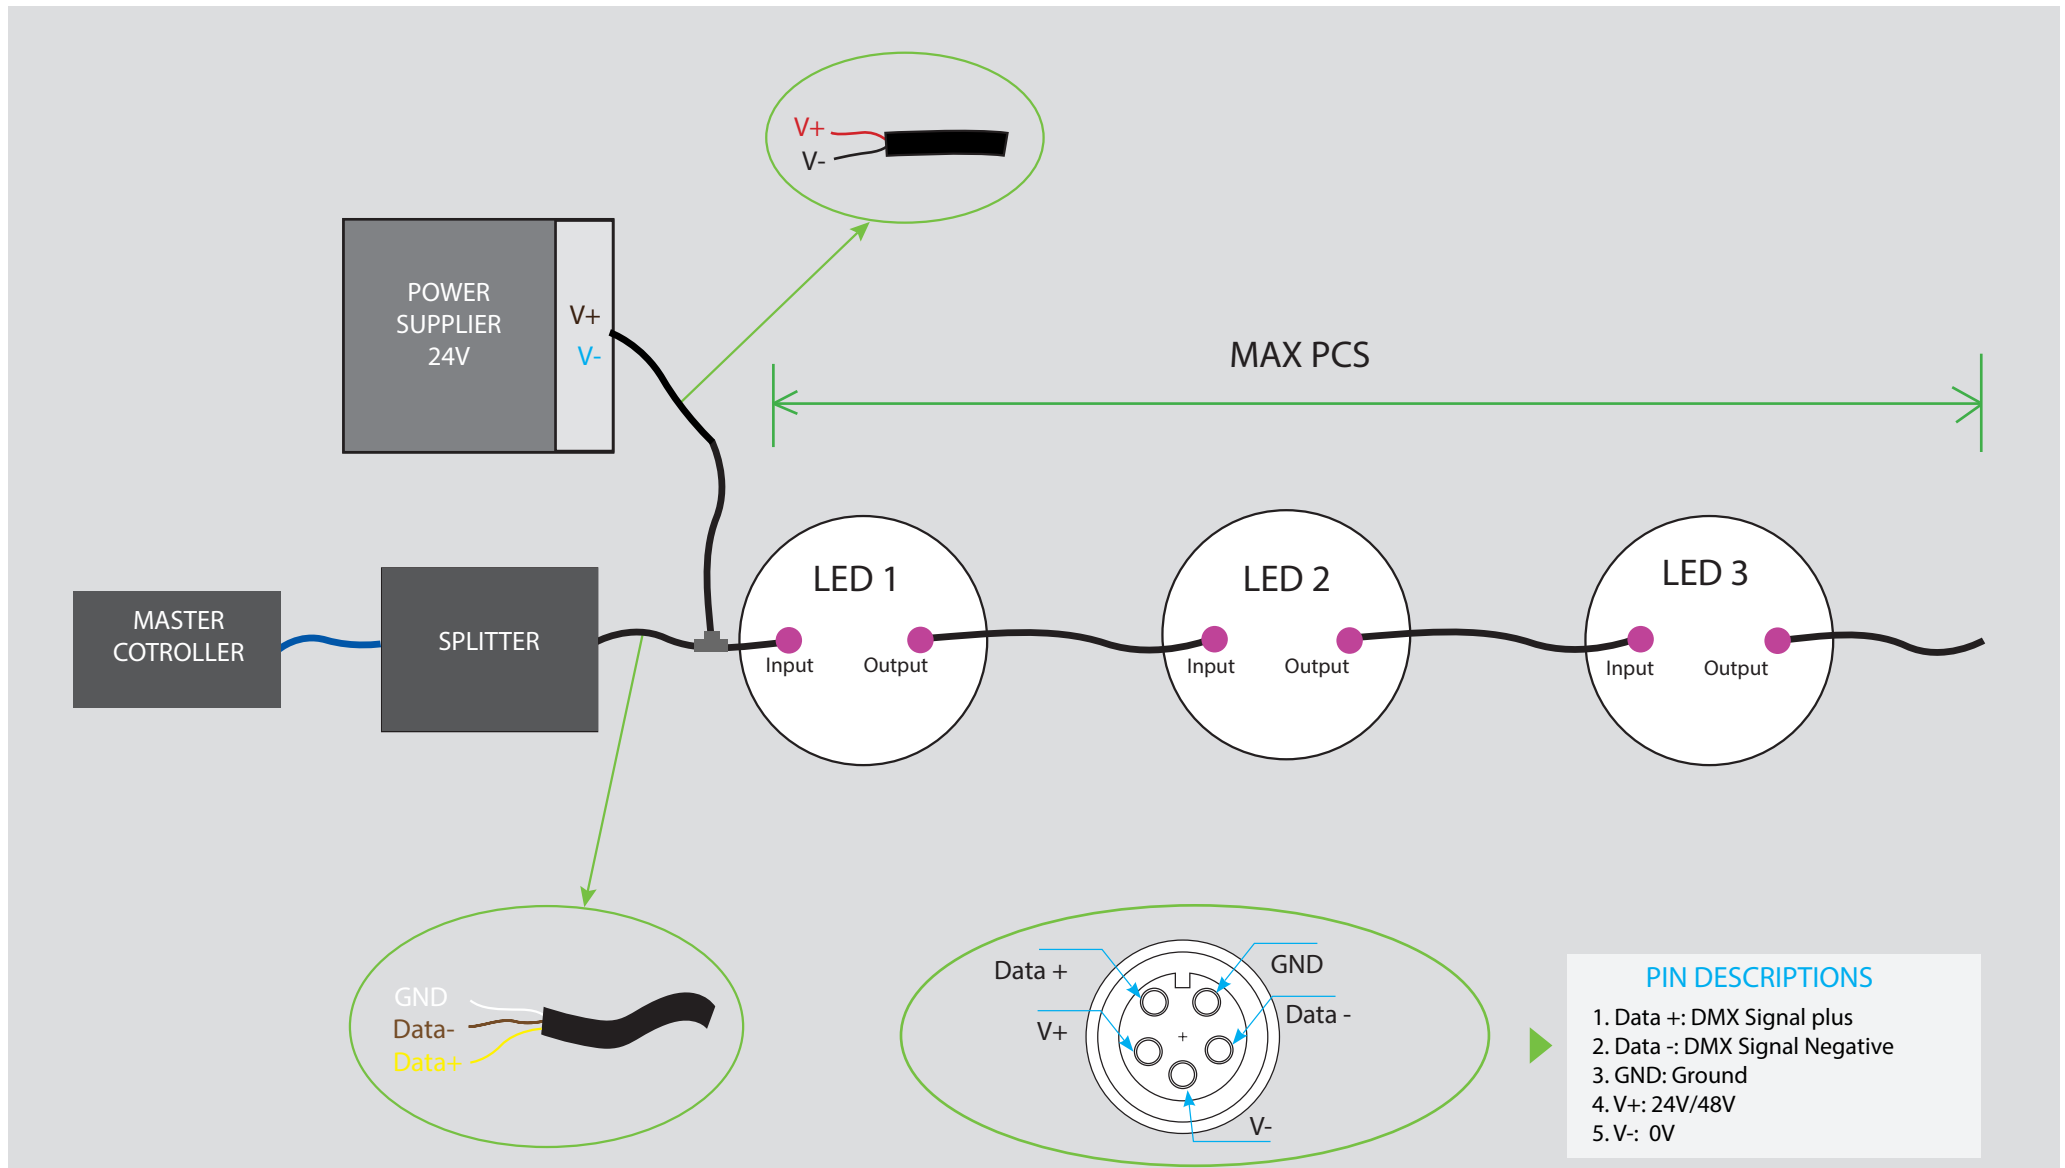

# LED FLOODLIGHT 45W - Applications

08



OUTDOOR



LANDSCAPE



HOTEL/RESTAURANT



FACADE BUILDING



# LED FLOODLIGHT 45W - Applications

09





THANKS FOR YOUR  
**ATTENTION**