




LED DOWNLIGHT 5W - SERIES F
PRODUCT INDOOR



ASLED LIGHT CO.,LTD

LED DOWNLIGHT 5W

SPECIFICATION

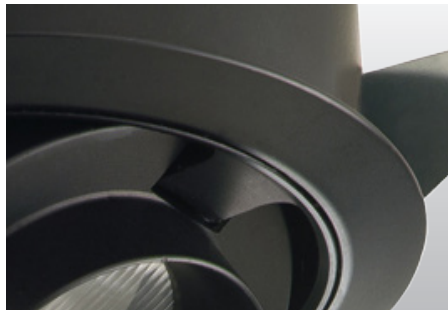

SPECIFICATION


- Order Code: DF005
- Input Voltage: 24Vdc, 220Vac, Dimmable
- Dimension: Ø85xH36 Cutout Ø75 mm
- Chip LED: CREE
- Power consumption: 5W
- Luminous Flux: 450Lm at 3000K, 5W, CRI>90, 36°
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color: 3000K, 4000K, 5000K
- CRI: >90
- Beam angle: 12° 25° 36° 50°
- IP Rating: IP44 (Update IP67)
- Life time: 50.000 hours
- Control: ON/OFF, 0 - 10V, DALI, DMX
- Standards:
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires



LED DOWNLIGHT 5W

TECHNICAL DETAILS

TECHNICAL DETAILS

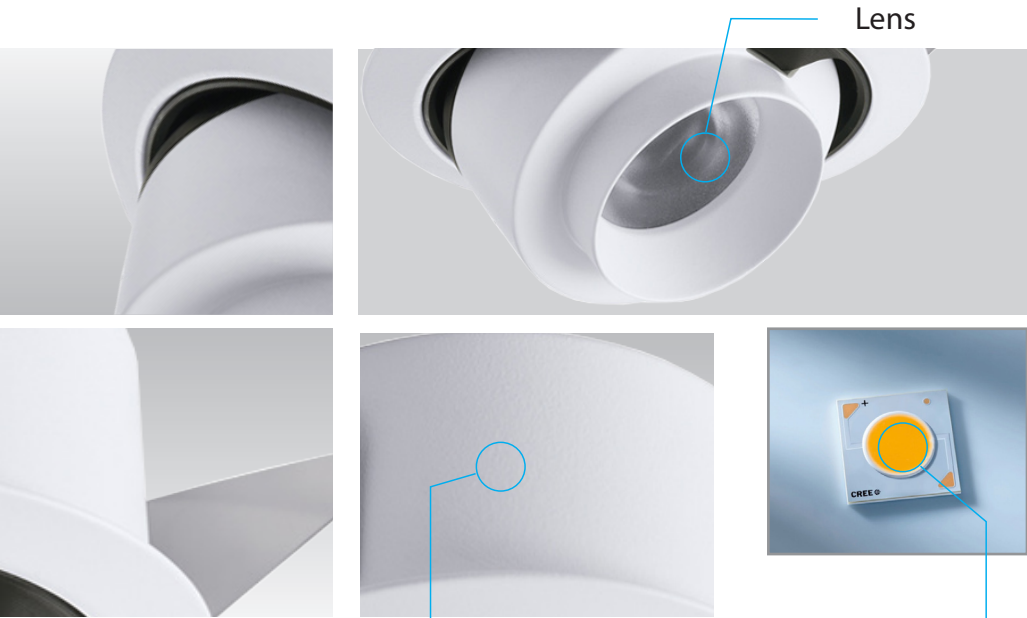


Aluminium

Chip LED CREE

Legace

Select Color XX



01



02



03



04





05



06

DIMENSIONS

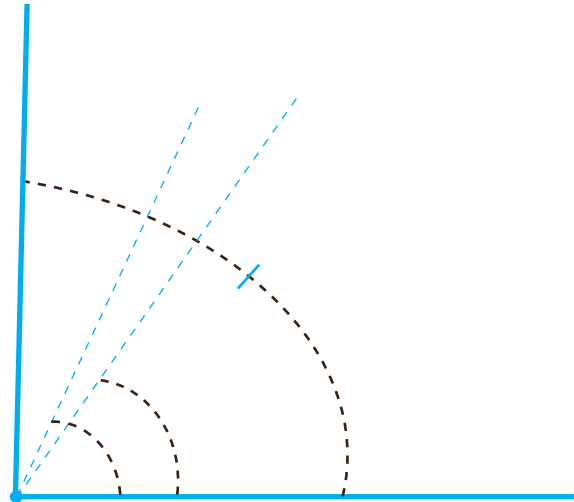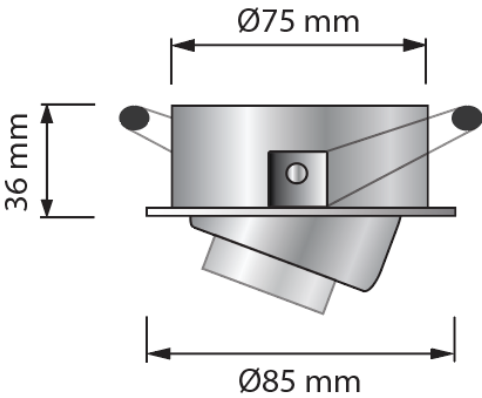

Beam Angle: 12° 24° 36° 50°


LED DOWNLIGHT 5W

04


SPECIFICATION

5W 3000K


PHOTOMETRIC CURVE

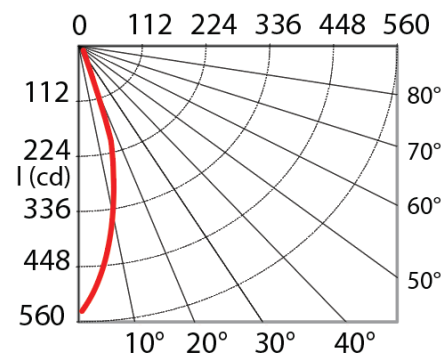

BEAM 36° AMPLITUDE DIAGRAM

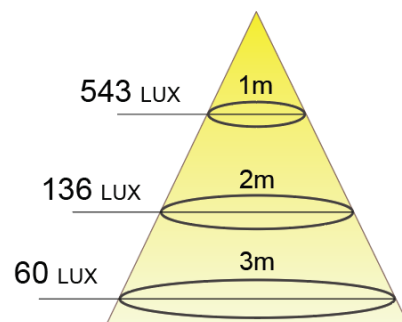

INSTALLATION

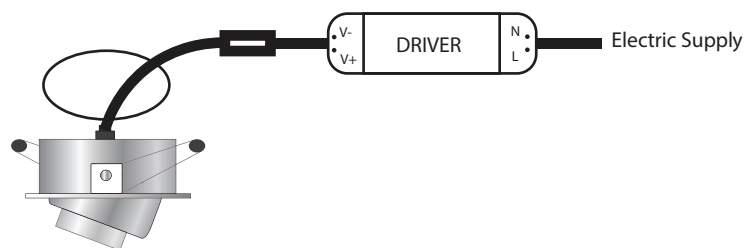

LED DOWNLIGHT 5W- Applications

05



INDOOR



OFFICE



HOTEL/RESTAURANT



LED DOWNLIGHT 5W - Applications





THANKS FOR YOUR
ATTENTION