





LED SPOTLIGHT 25W - SERIES A
PRODUCT OUTDOOR



ASLED LIGHT CO.,LTD

LED SPOTLIGHT 25W

SPECCIFICATION

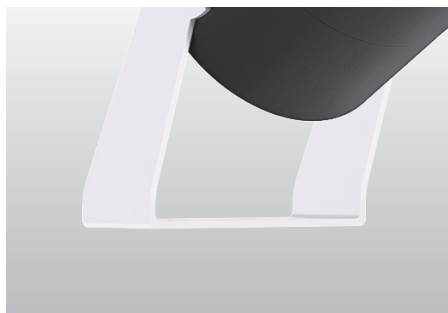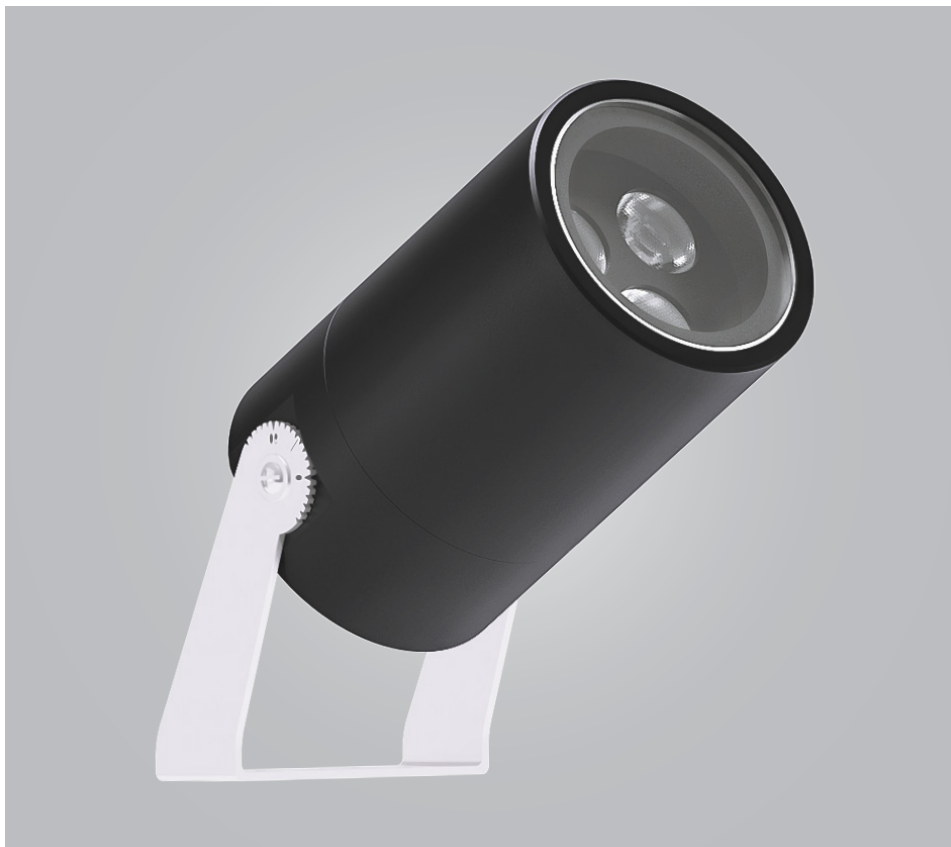

SPECCIFICATION


- Order Code: SA025
- Input Voltage: 24VDC, 220VAC
- Dimension: Ø84xL170xH117 mm
- Chip LED: CREE
- Power consumption: 25W
- Luminous Flux: 2250Lm at 3000K, 25W, CRI>90, 36°
- Material: Aluminium
- Efficiency: 90%
- Environment temperature: from -30°C to 60°C
- Color: 3000K, 4000K, 5000K, RGBW
- CRI: >90
- Beam angle: 12° 24° 36° 50°
- IP Rating: IP68
- Life time: 50.000 hours
- Control: ON/OFF, DIM 0 - 10V, DALI, DMX512
- Standards:
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires



LED SPOTLIGHT 25W

TECHNICAL DETAILS



TECHNICAL DETAILS

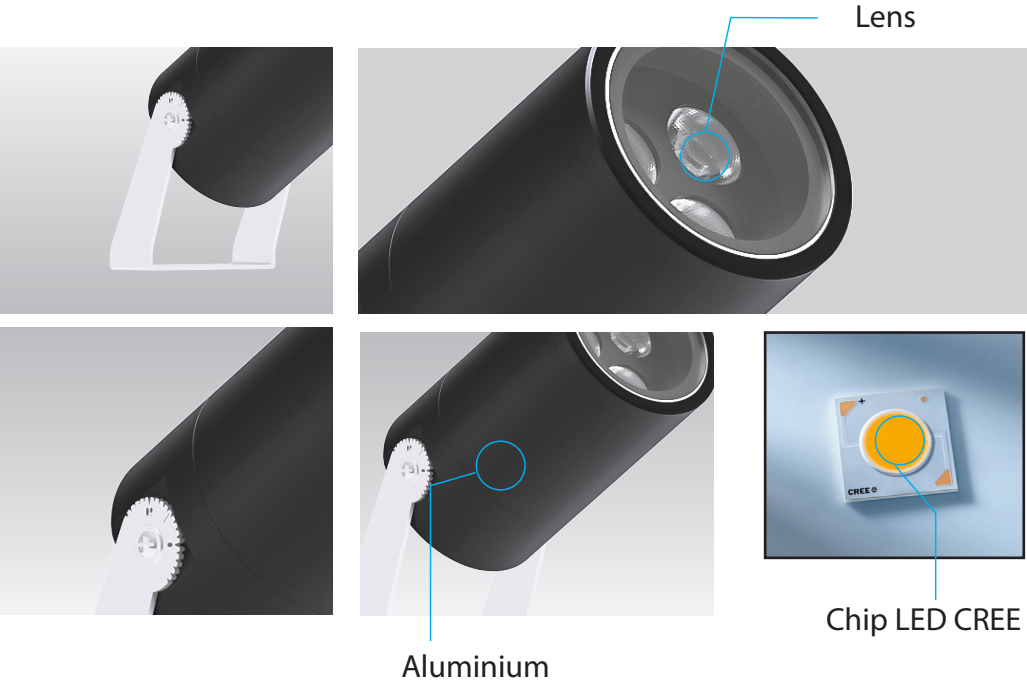



Legace

Select Color XX

Lens Clear

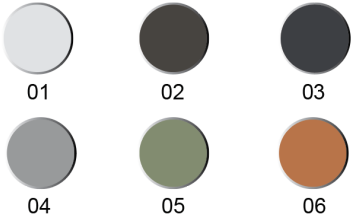




DIMENSIONS

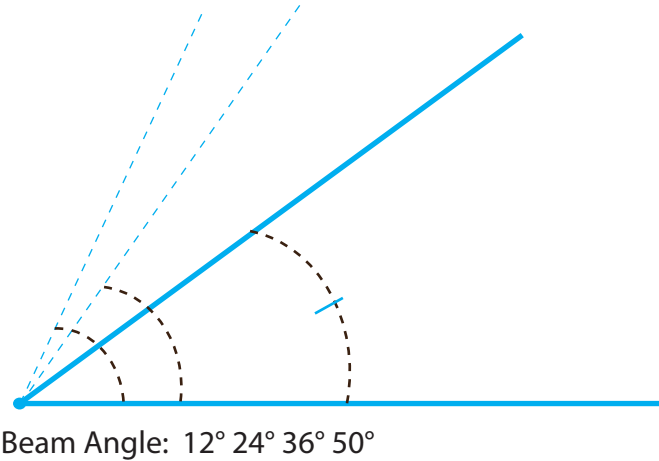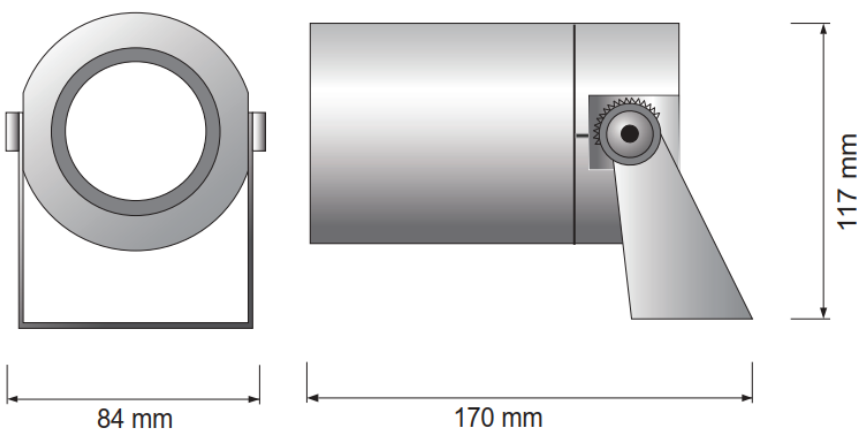

LED SPOTLIGHT 25W

SPECIFICATION


PHOTOMETRIC CURVE BEAM 36° AMPLITUDE DIAGRAM

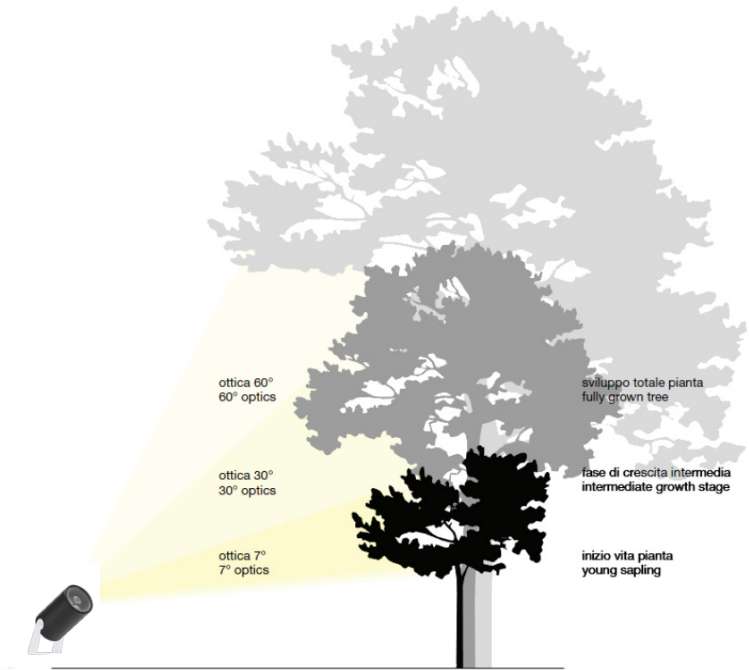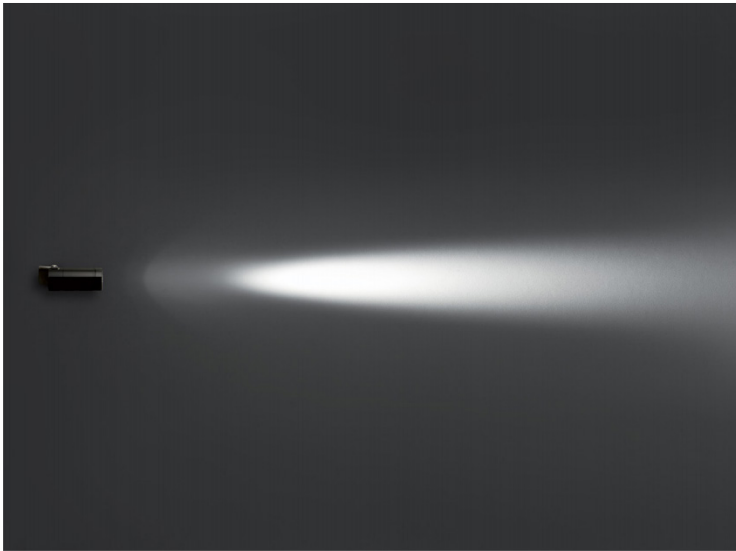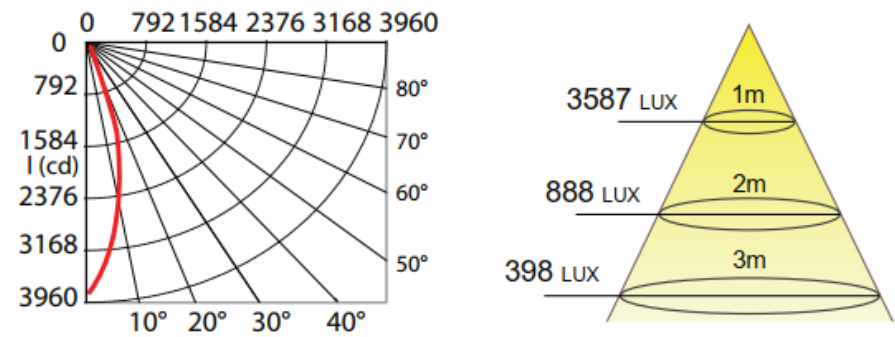

LED SPOTLIGHT 25W

05


POWER SUPPLIES - INPUT VOTAGE

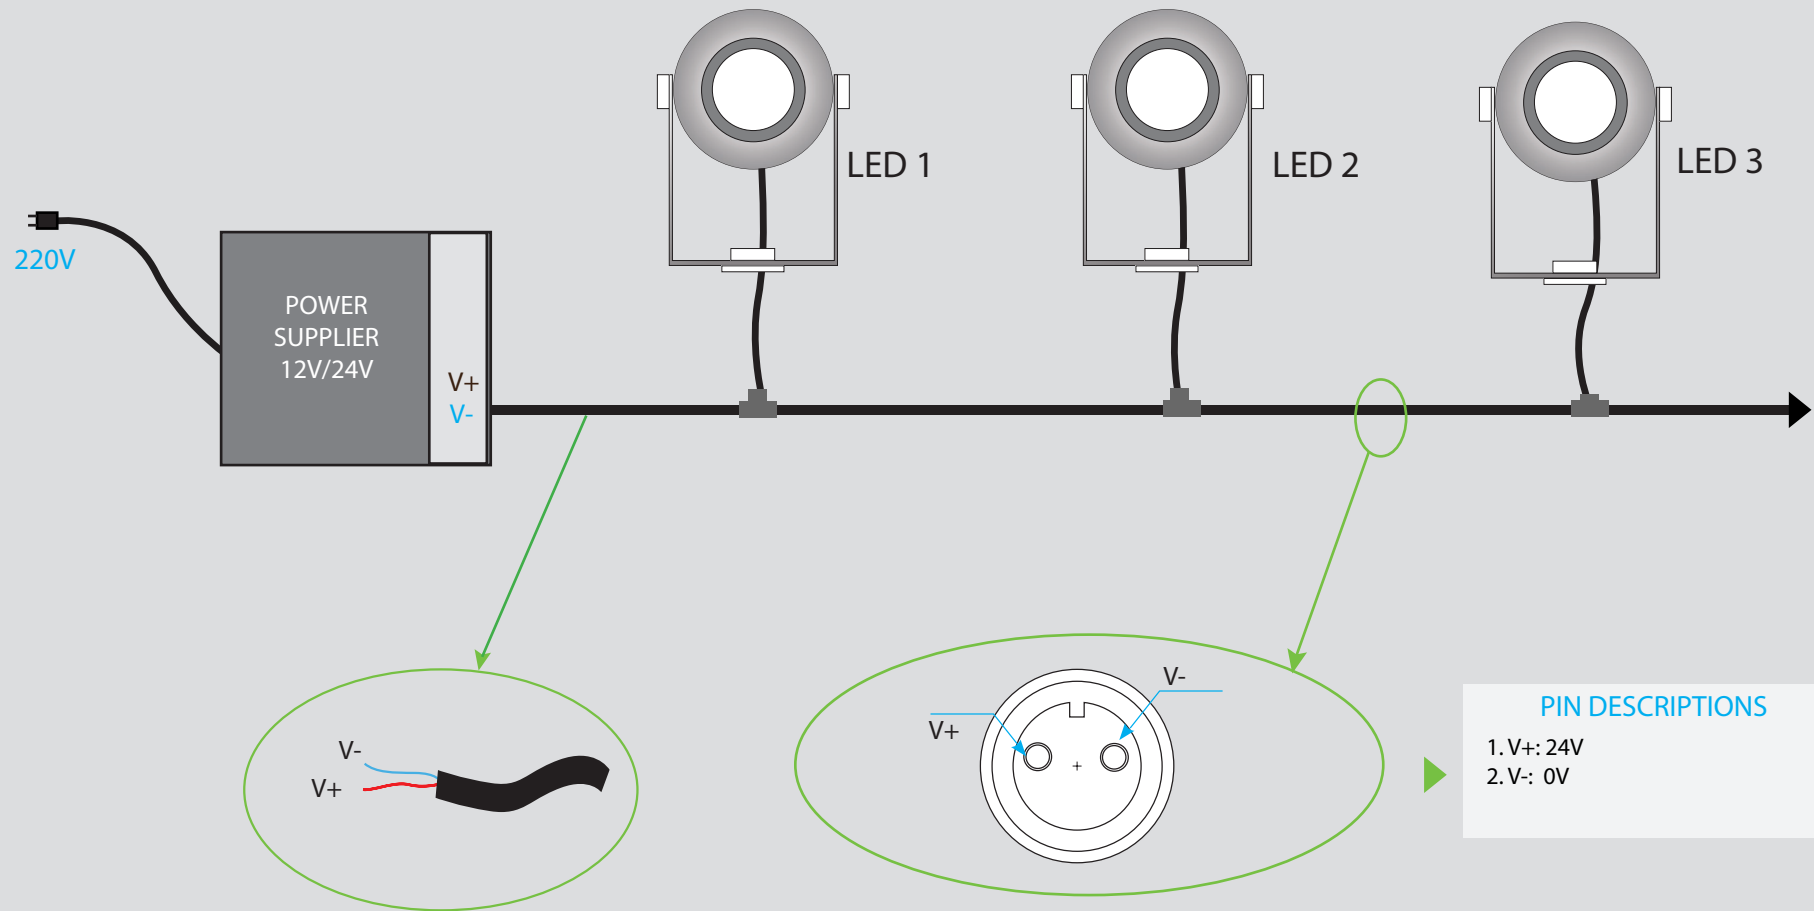

LED SPOTLIGHT 25W

06


DIAGRAM CONNECTOR - DMX PROTOCOL - 4 CORE & DECODER

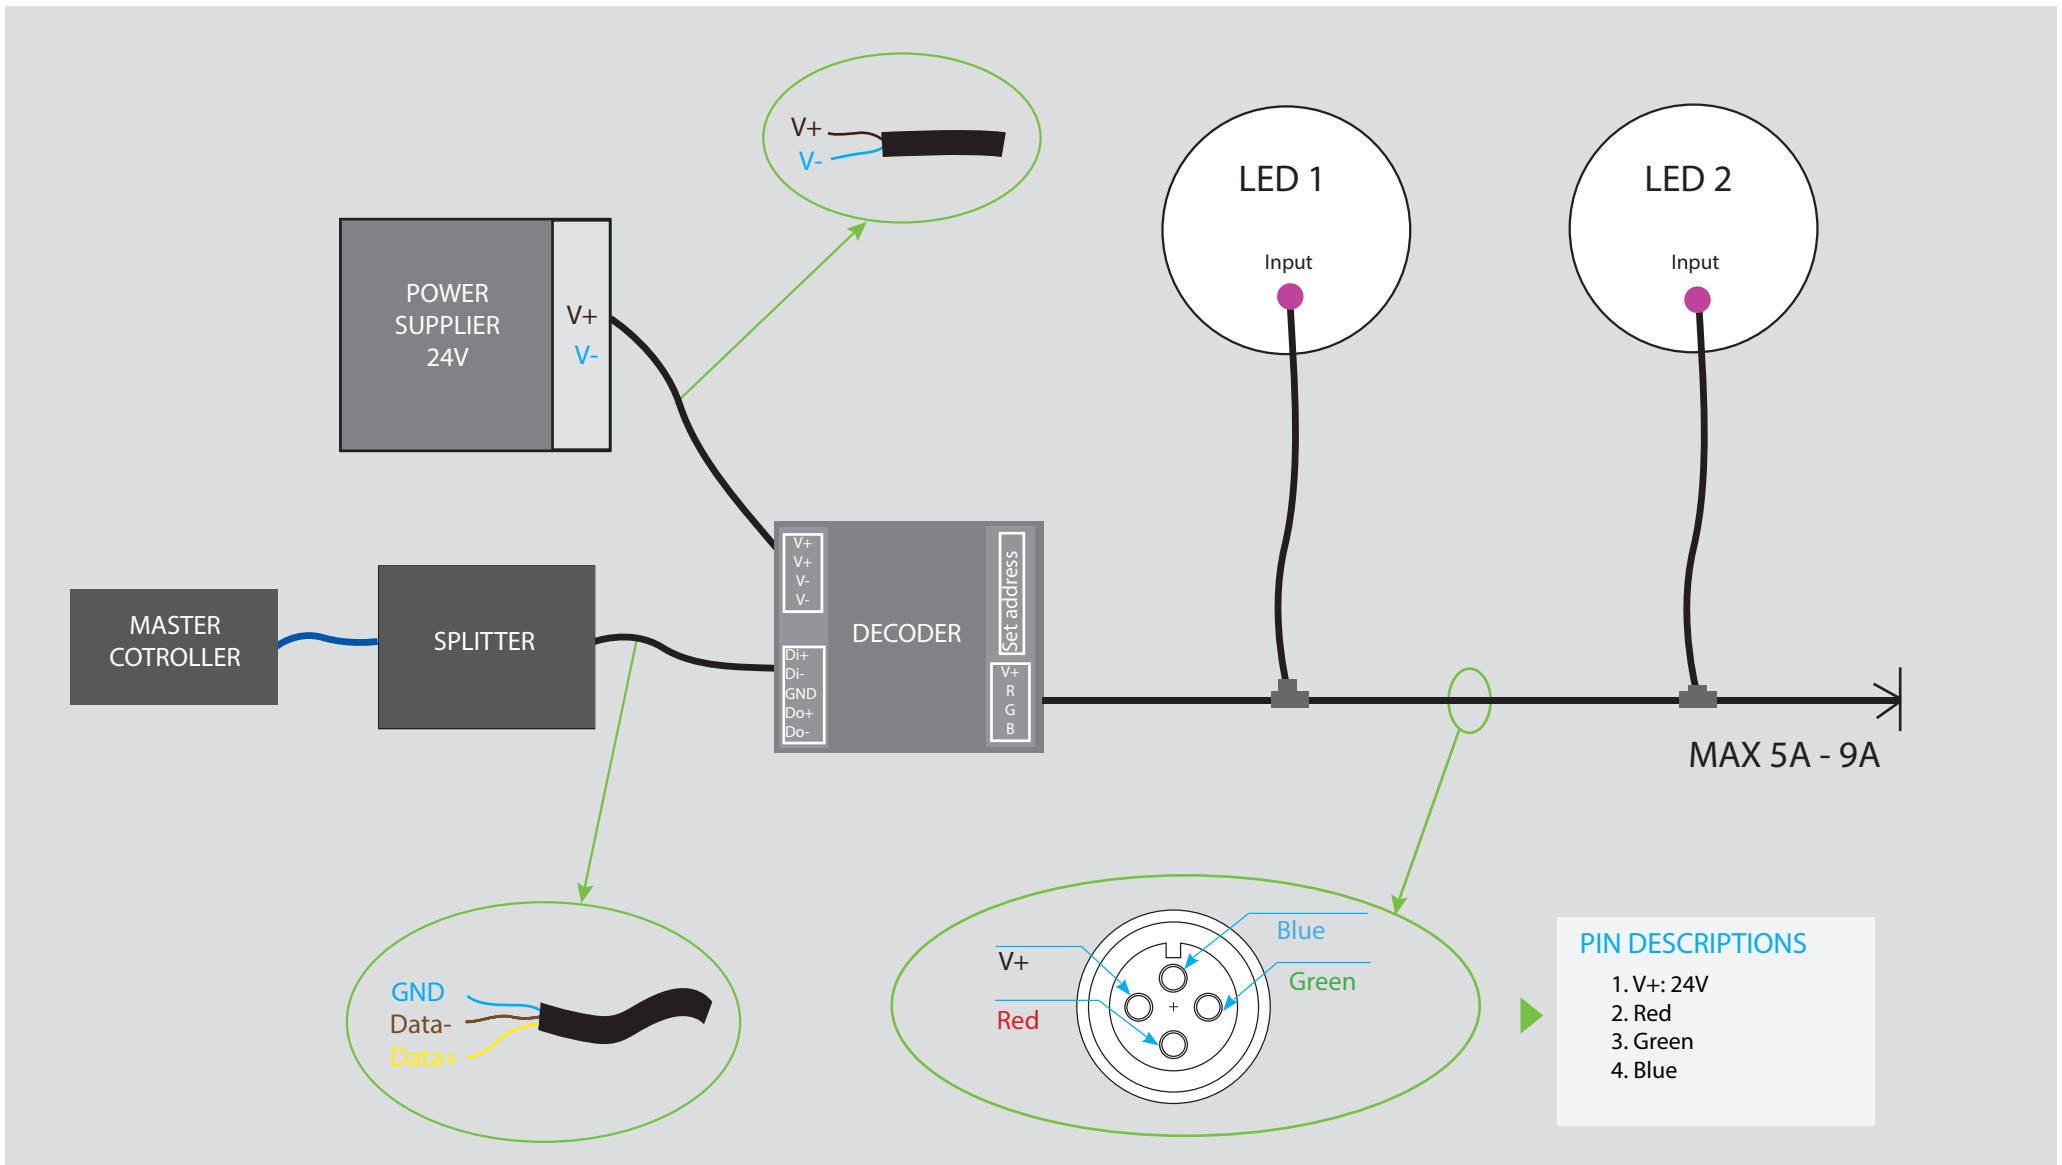

LED SPOTLIGHT 25W


07

DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE

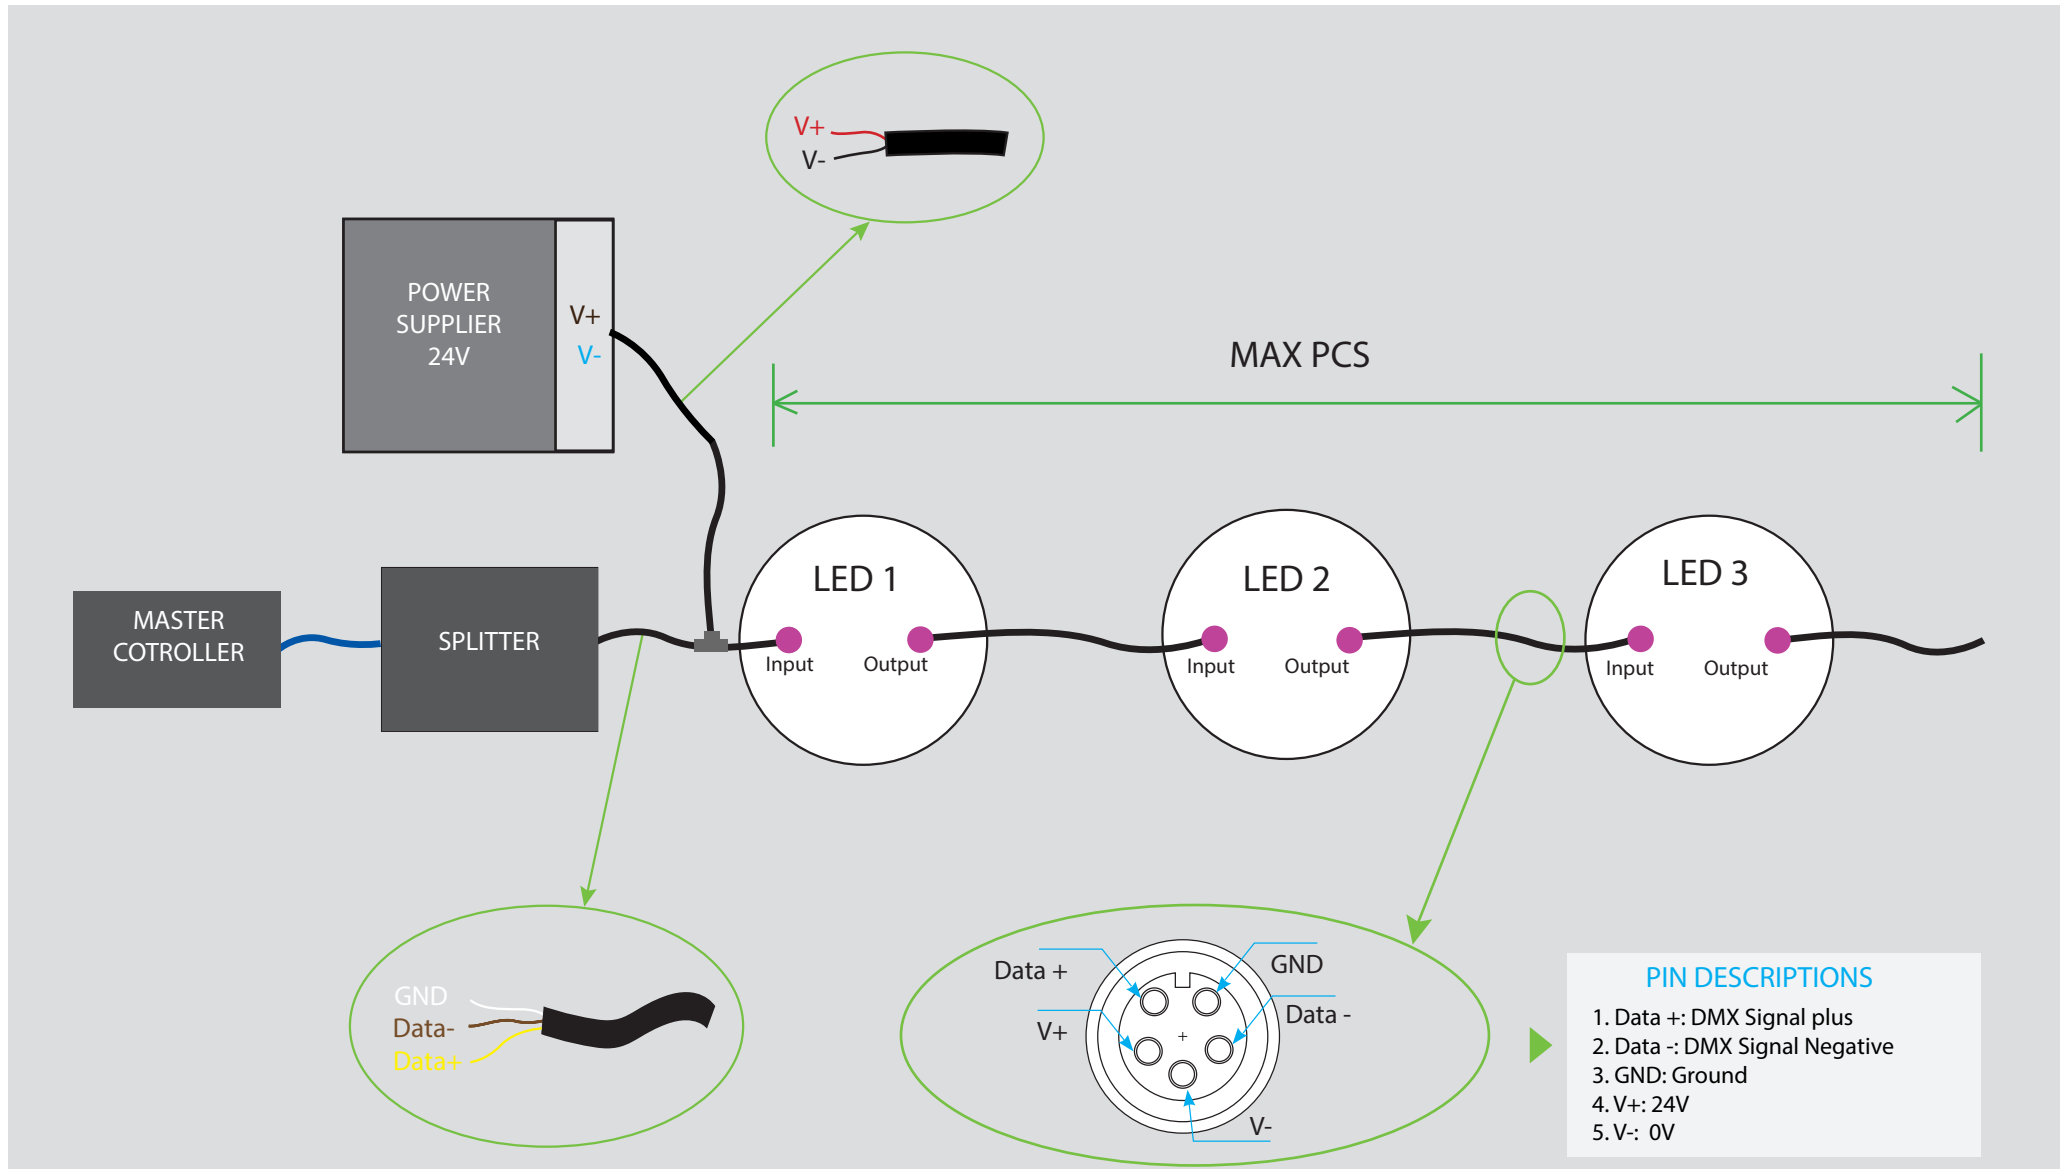

LED SPOTLIGHT 25W - Applications

08



OUTDOOR



LANDSCAPE



HOTEL/RESTAURANT



FACADE BUILDING



LED SPOTLIGHT 25W - Applications





THANKS FOR YOUR
ATTENTION