LED UNDER WATER LIGHT 12W - SERIES A

PRODUCT OUTDOOR

ASLED

LED UNDER WATER LIGHT 12W

SPECCIFICATION

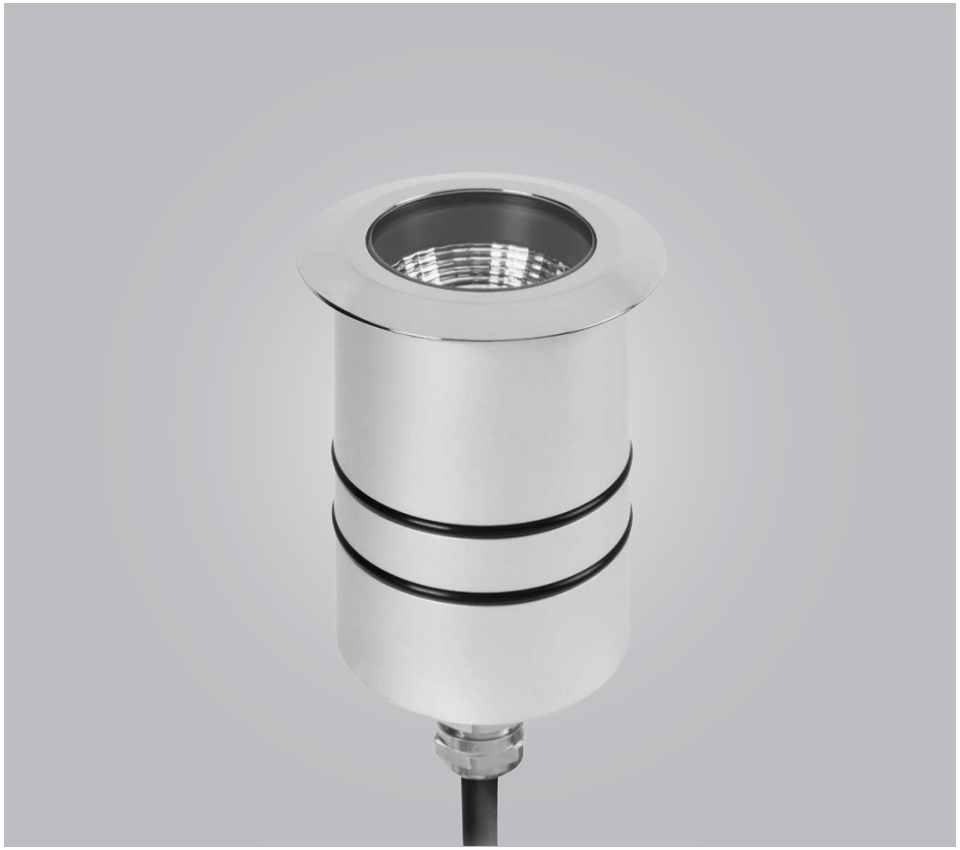

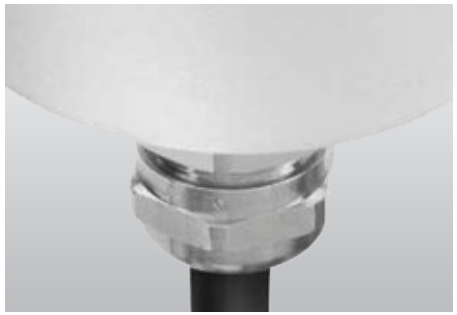

SPECCIFICATION

- Order Code: UA012, UA012RGBW
- Input Voltage: 24VDC
- Dimension: Ø77xH100 Cutout Ø60 mm
- Chip LED: CREE
- Power consumption: 12W
- Luminous Flux: 1080lm at 3000K, 12W, CRI>90, 36°
- Material: Stainless steel
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color: 3000K, 4000K, 5000K, RGBW
- CRI: >90
- Beam angle: 12° 15° 24° 36° 50°
- IP Rating: IP68
- Life time: 50.000 hour
- Control: ON/OFF
- Standards:
  + RoHS; EMC protection
  + IEC 62031LED
  + IEC 60598 Luminaires

IP68

LED UNDER WATER LIGHT 12W

TECHNICAL DETAILS

TECHNICAL DETAILS



Lens clear

Stainless Steel



Chip LED CREE

Connector IP68

Lens Clear

Legace Refletor



DIMENSIONS

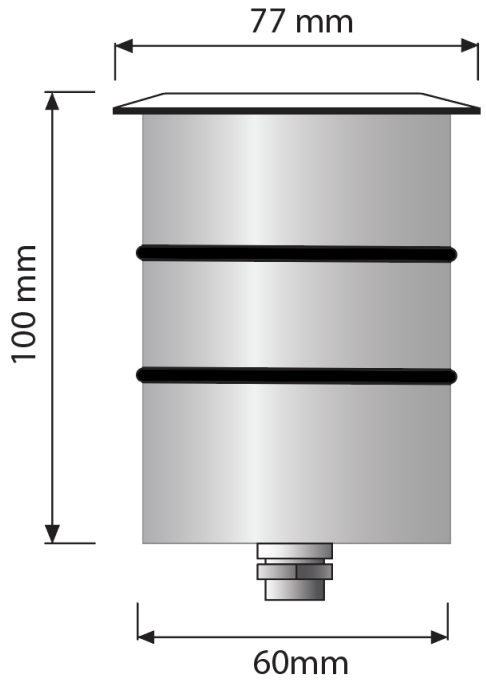

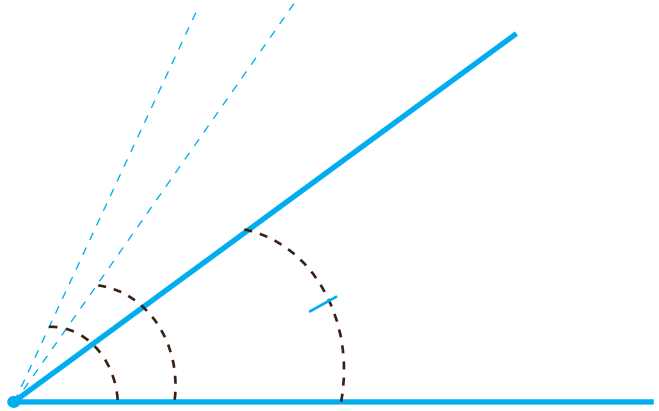

Beam Angle: 12° 15° 24° 36° 50°

LED UNDER WATER LIGHT 12W

SPECIFICATION

PHOTOMETRIC CURVE

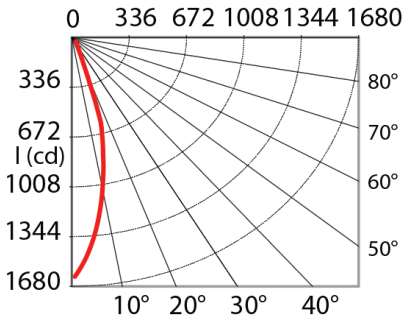

BEAM 36° AMPLITUDE DIAGRAM

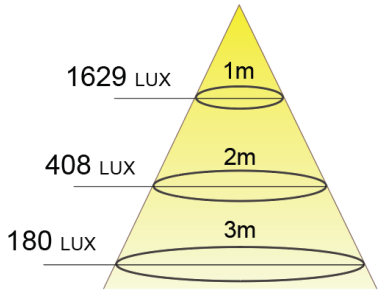

OPTICS

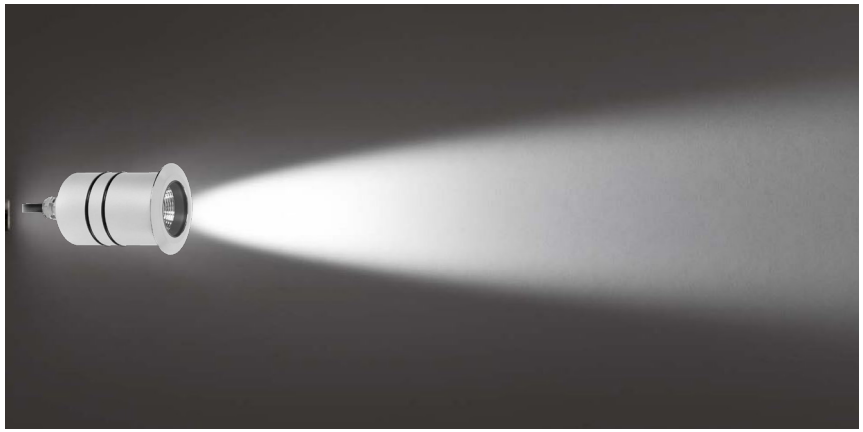

INSTALLATION

CONNECTOR IP68

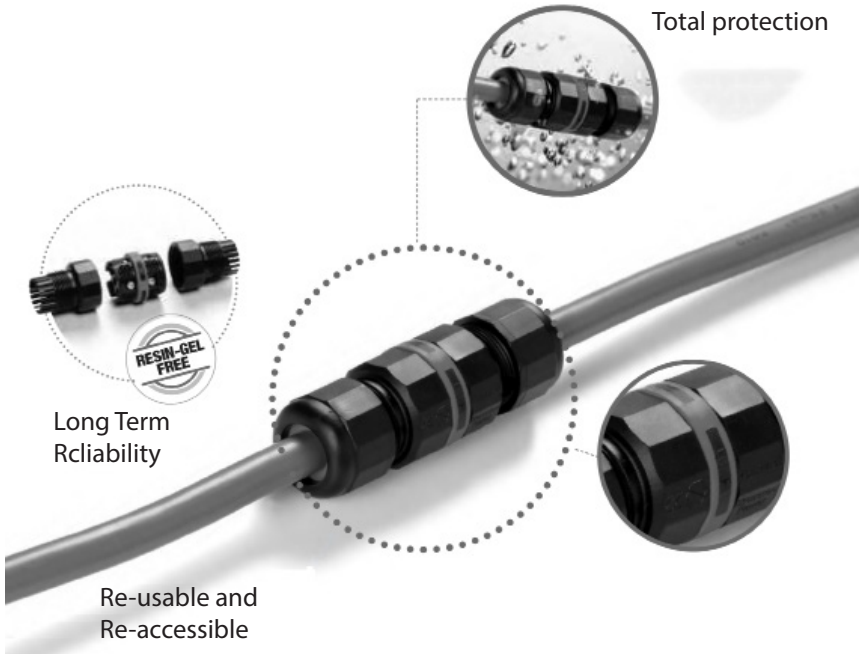

LED UNDER WATER LIGHT 12W

POWER SUPPLIES - INPUT VOTAGE

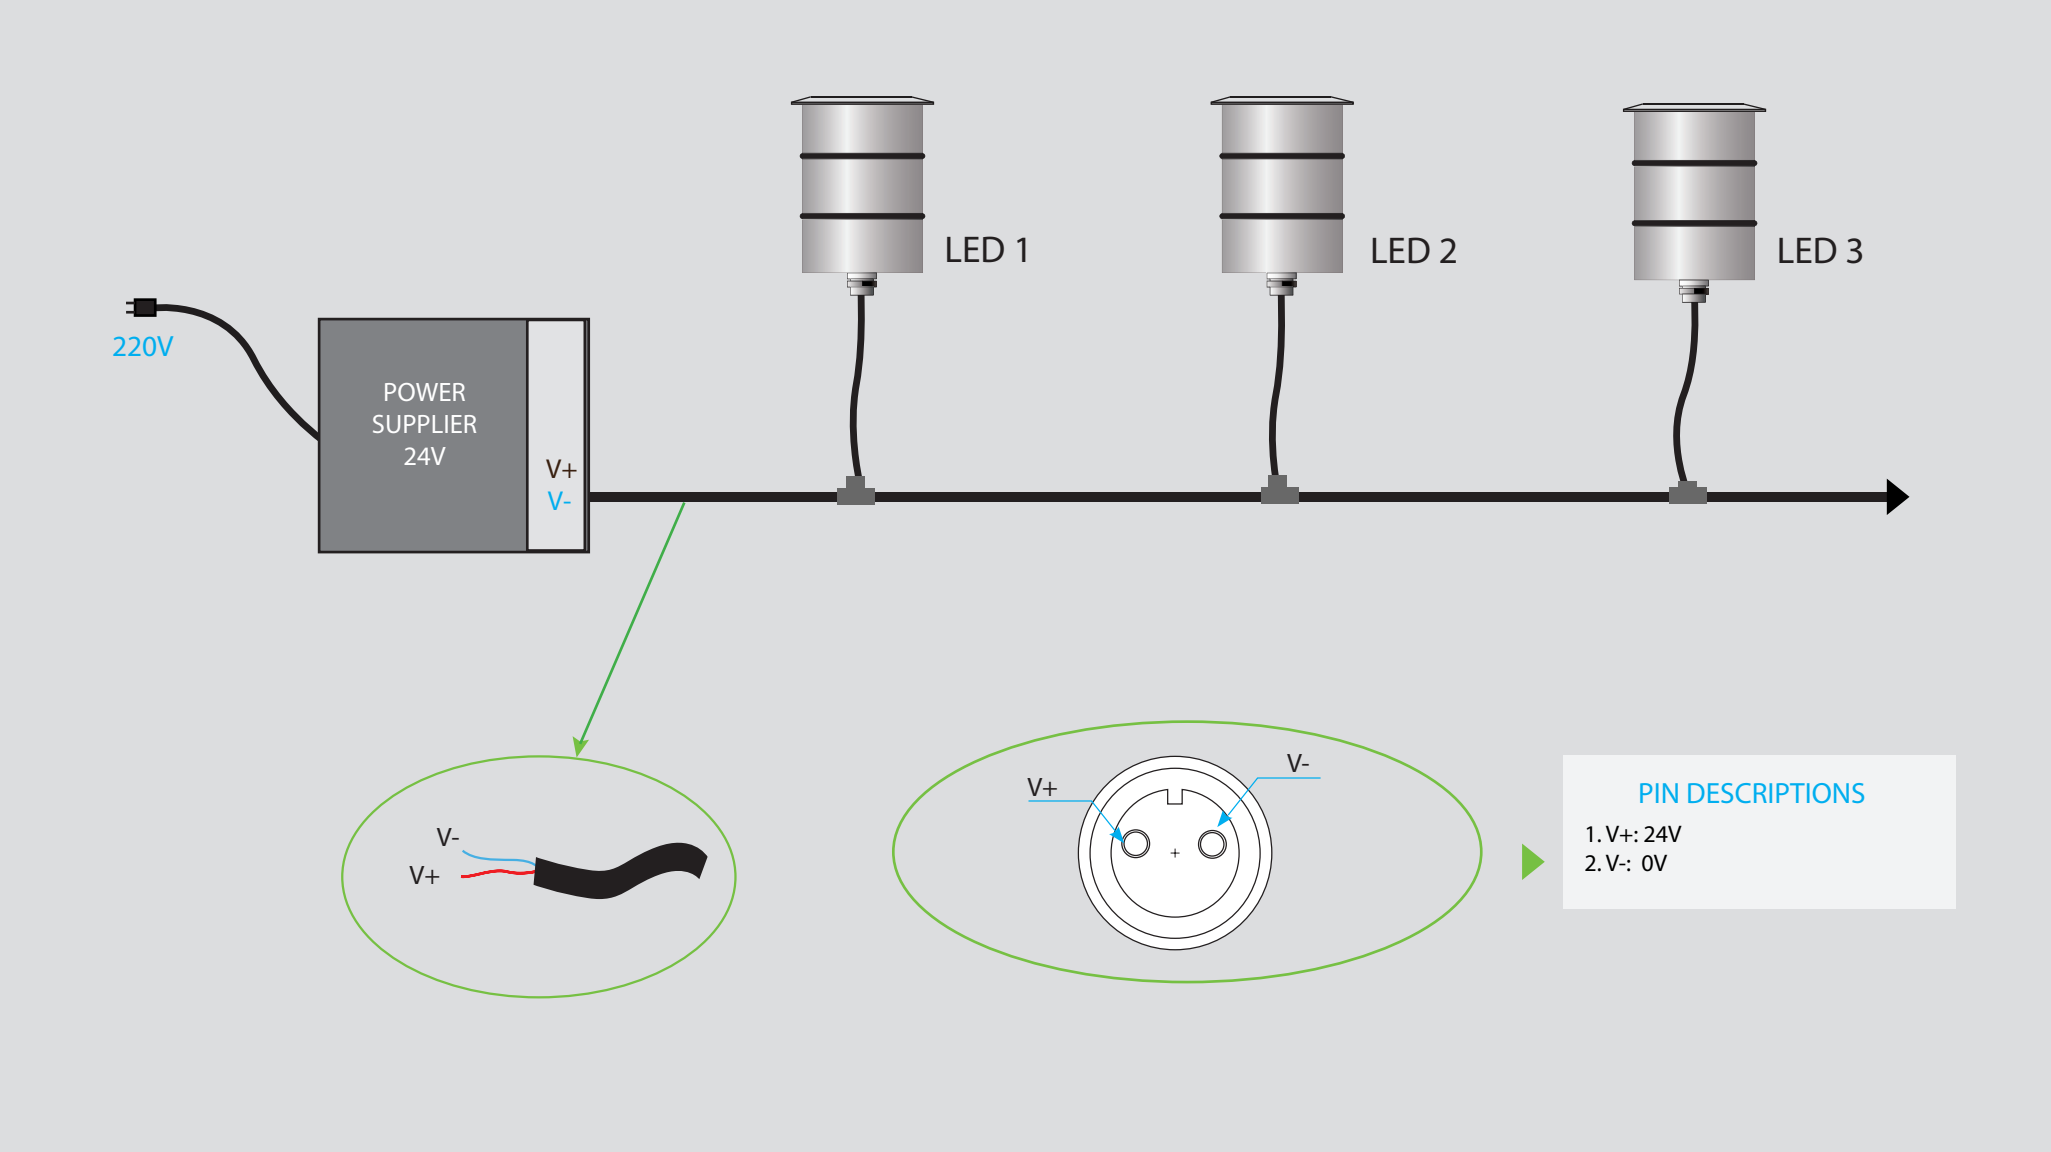

LED UNDER WATER LIGHT 12W

DIAGRAM CONNECTOR - DMX PROTOCOL - 4 CORE & DECODER

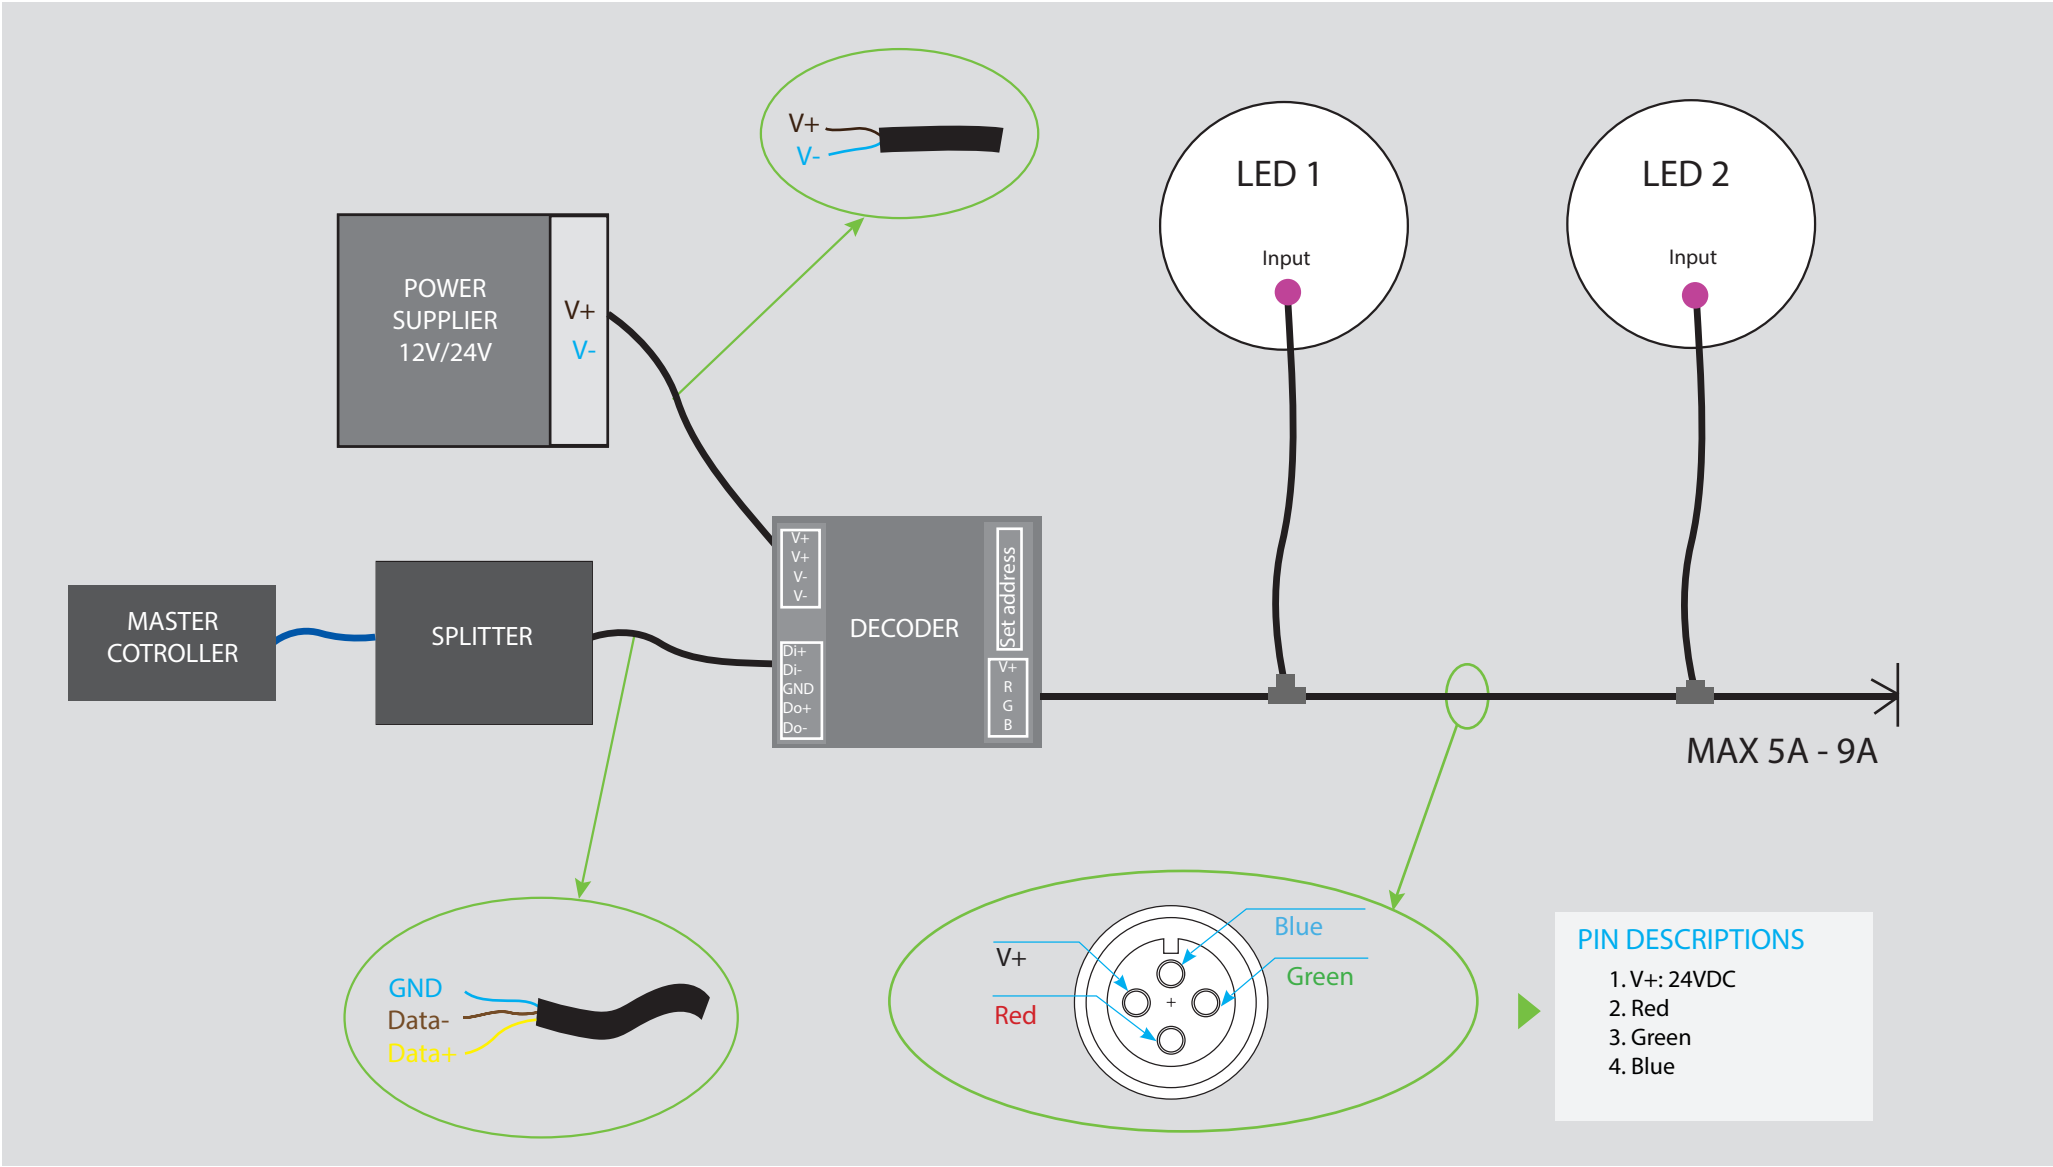

LED UNDER WATER LIGHT 12W

DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE

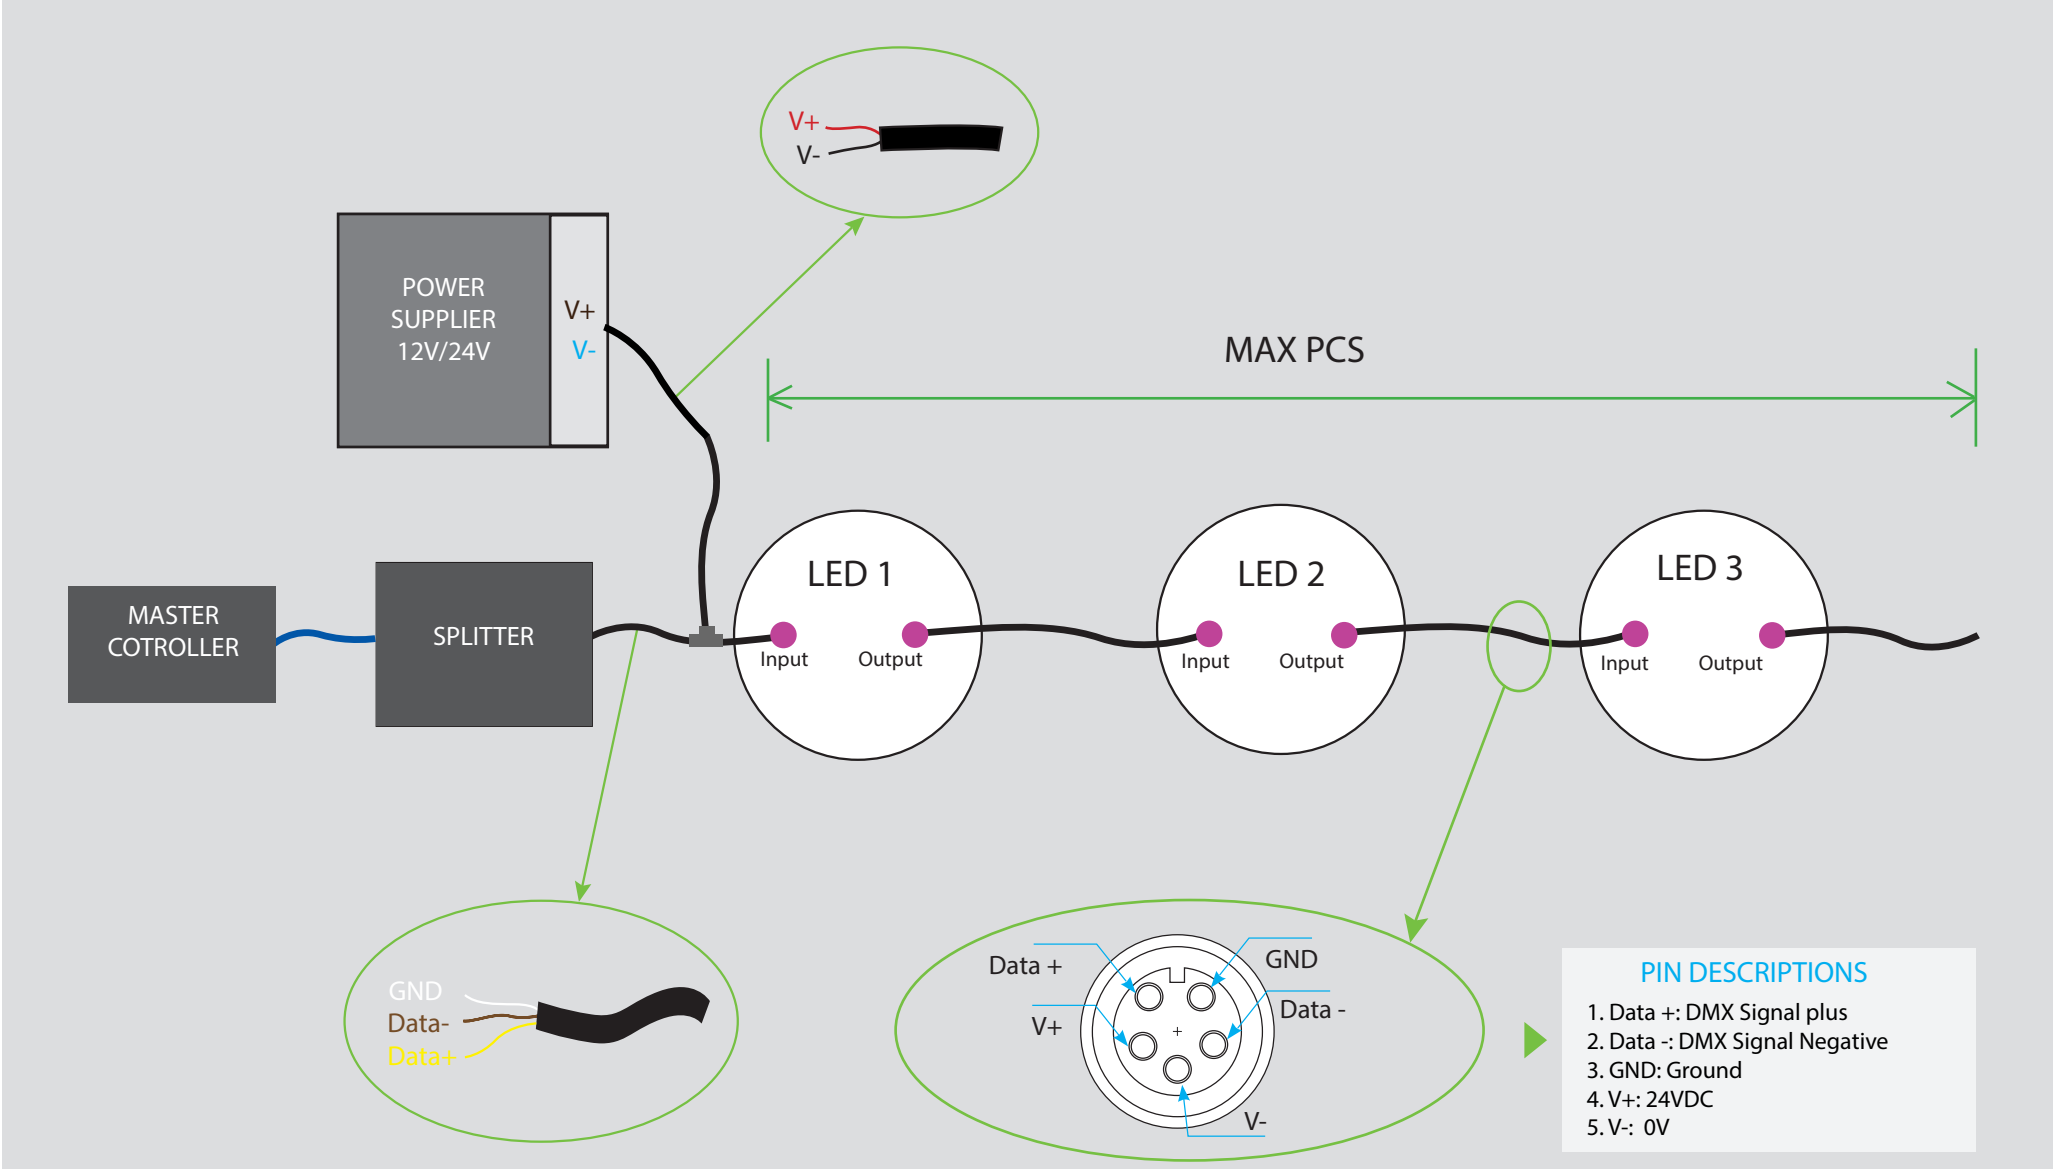

LED UNDER WATER LIGHT 12W - Applications

OUTDOOR

LANDSCAPE

HOTEL/RESTAURANT



LED UNDER WATER LIGHT 12W - Applications

THANKS FOR YOUR

ATTENTION