



LED UNDER WATER LIGHT 9W - SERIES B
PRODUCT OUTDOOR



ASLED LIGHT CO.,LTD

LED UNDER WATER LIGHT 9W

02

SPECCIFICATION



SPECCIFICATION

- Order Code: UB009, UB009RGBW
- Input Voltage: 24VDC
- Dimension: Ø60xL120xH85 mm
- Chip LED: CREE
- Power consumption: 9W
- Luminous Flux: 810lm at 3000K, 9W, CRI>90, 36°
- Material: Stainless steel
- Efficiency: 90%
- Environment temperature: from -30° to 60°C
- Color: 3000K, 4000K, 5000K, RGBW
- CRI: >90
- Beam angle: 12° 15° 24° 36° 50°
- IP Rating: IP68
- Life time: 50.000 hour
- Control: ON/OFF
- Standards:
 - + RoHS; EMC protection
 - + IEC 62031LED
 - + IEC 60598 Luminaires





LED UNDER WATER LIGHT 9W

TECHNICAL DETAILS

TECHNICAL DETAILS




DIMENSIONS

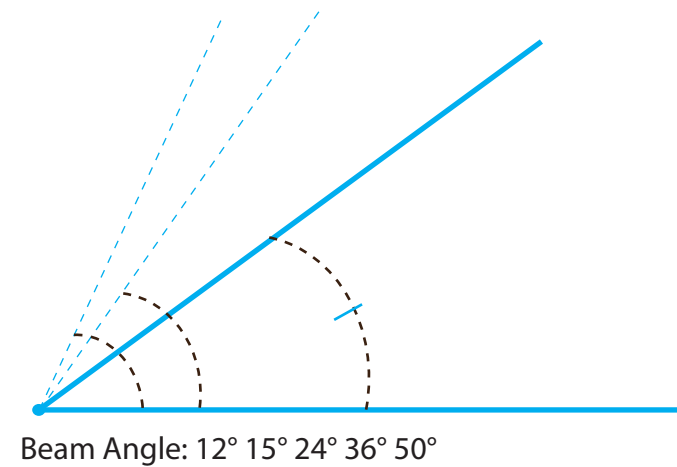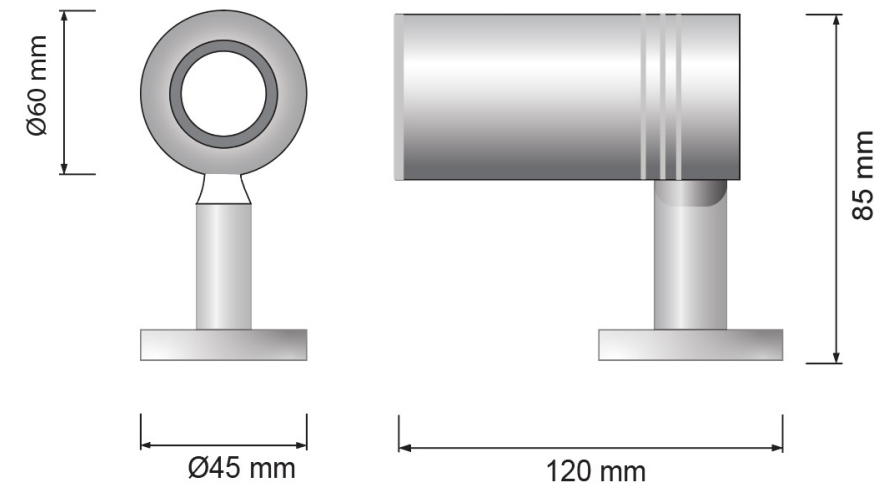


LED UNDER WATER LIGHT 9W

SPECIFICATION

PHOTOMETRIC CURVE

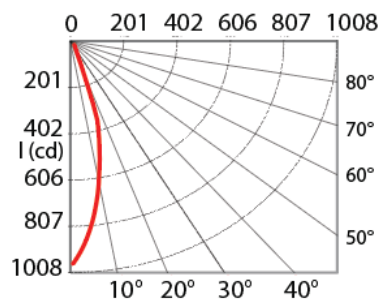


BEAM 36° AMPLITUDE DIAGRAM

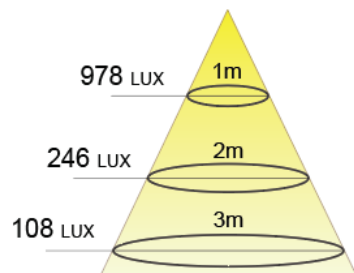


INSTALLATION



OPTICS

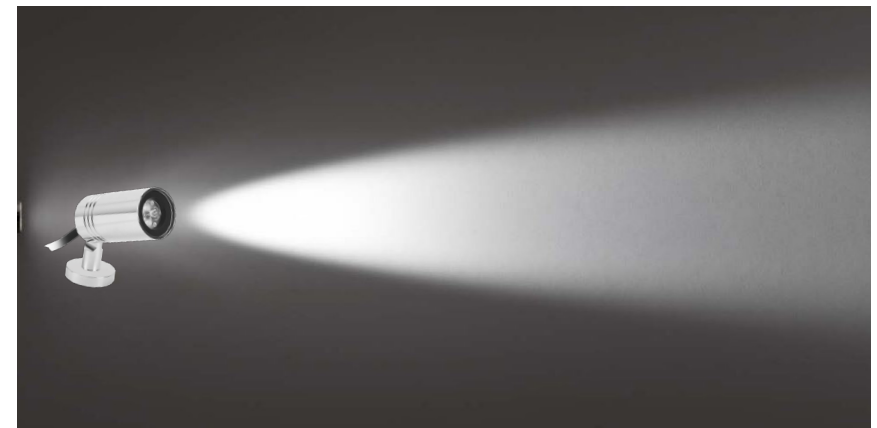


CONNECTOR IP68

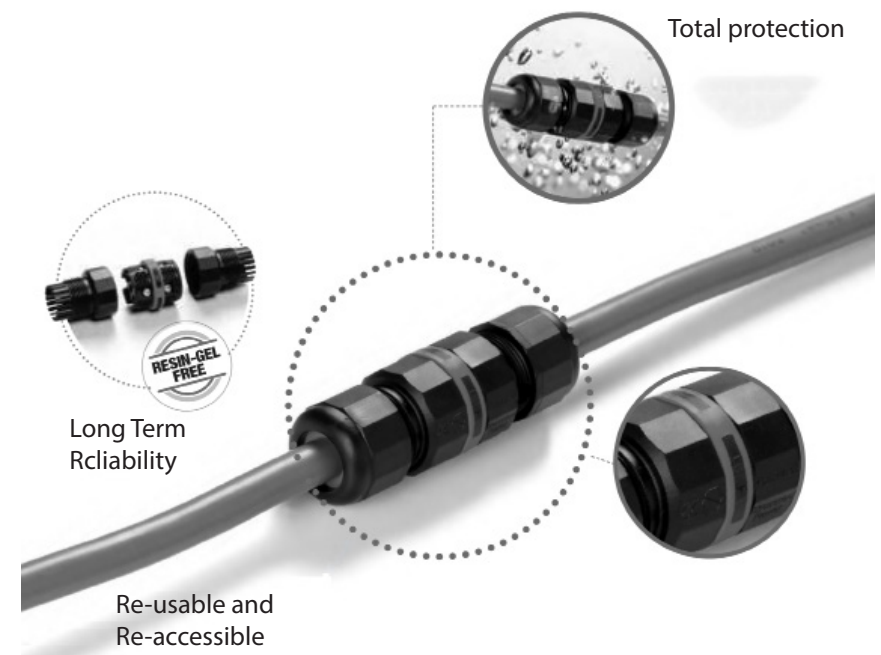

LED UNDER WATER LIGHT 9W

05


POWER SUPPLIES - INPUT VOTAGE

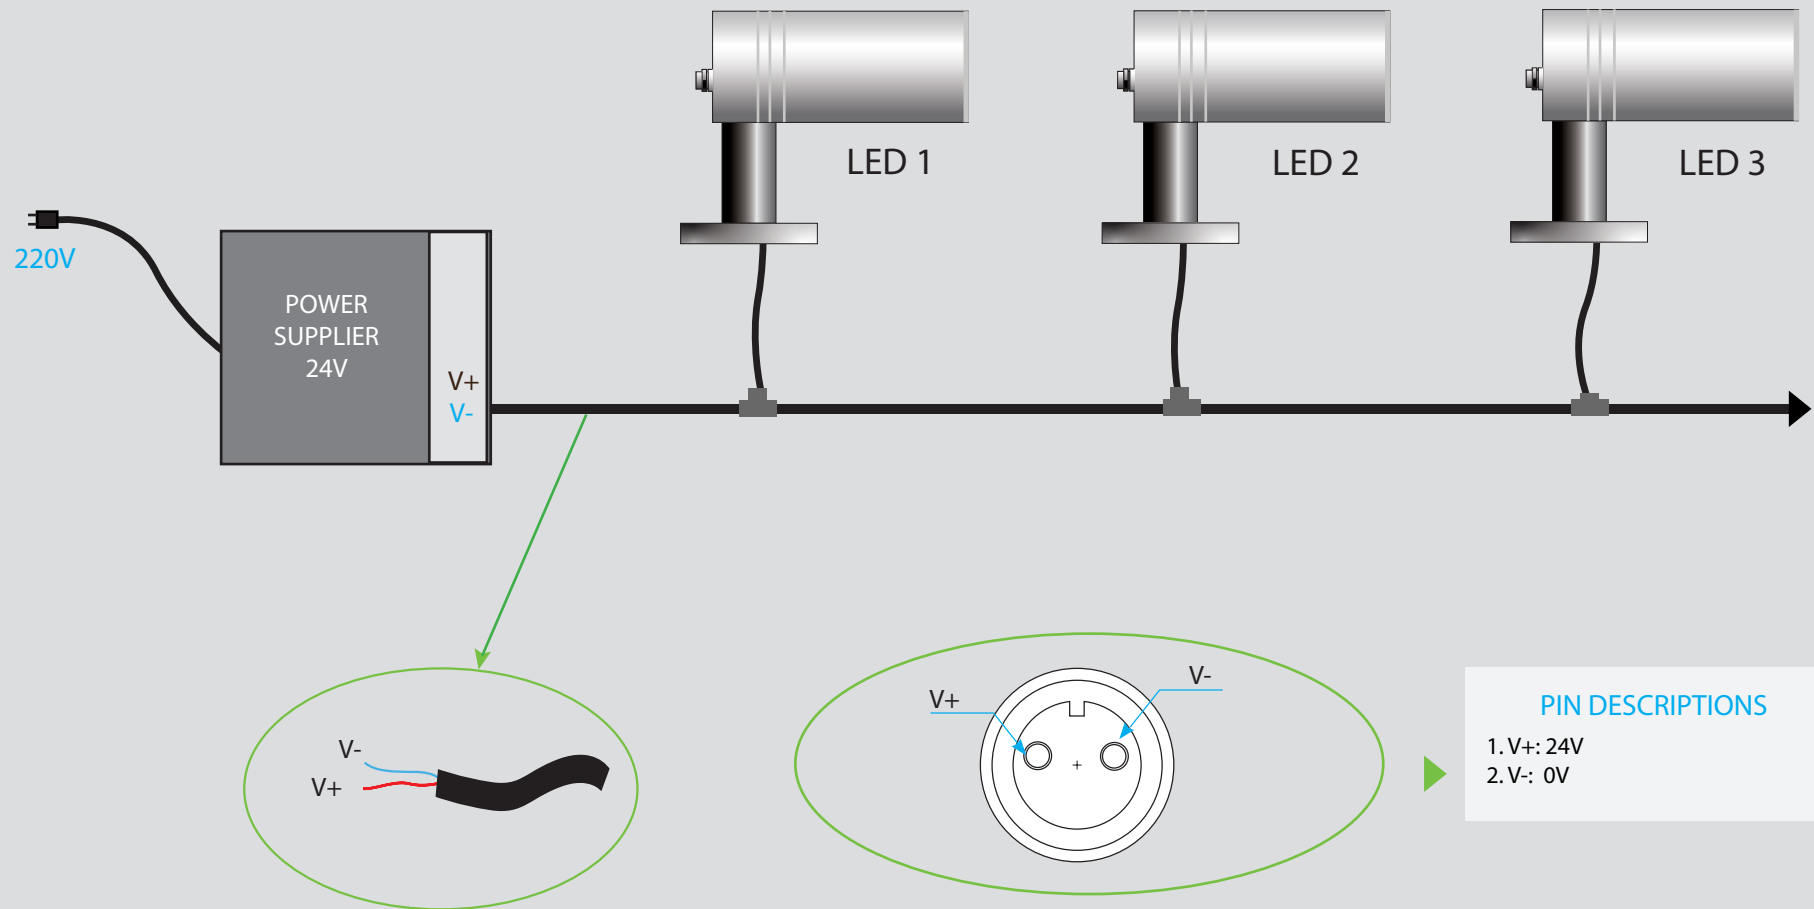

LED UNDER WATER LIGHT 9W

06


DIAGRAM CONNECTOR - DMX PROTOCOL - 4 CORE & DECODER

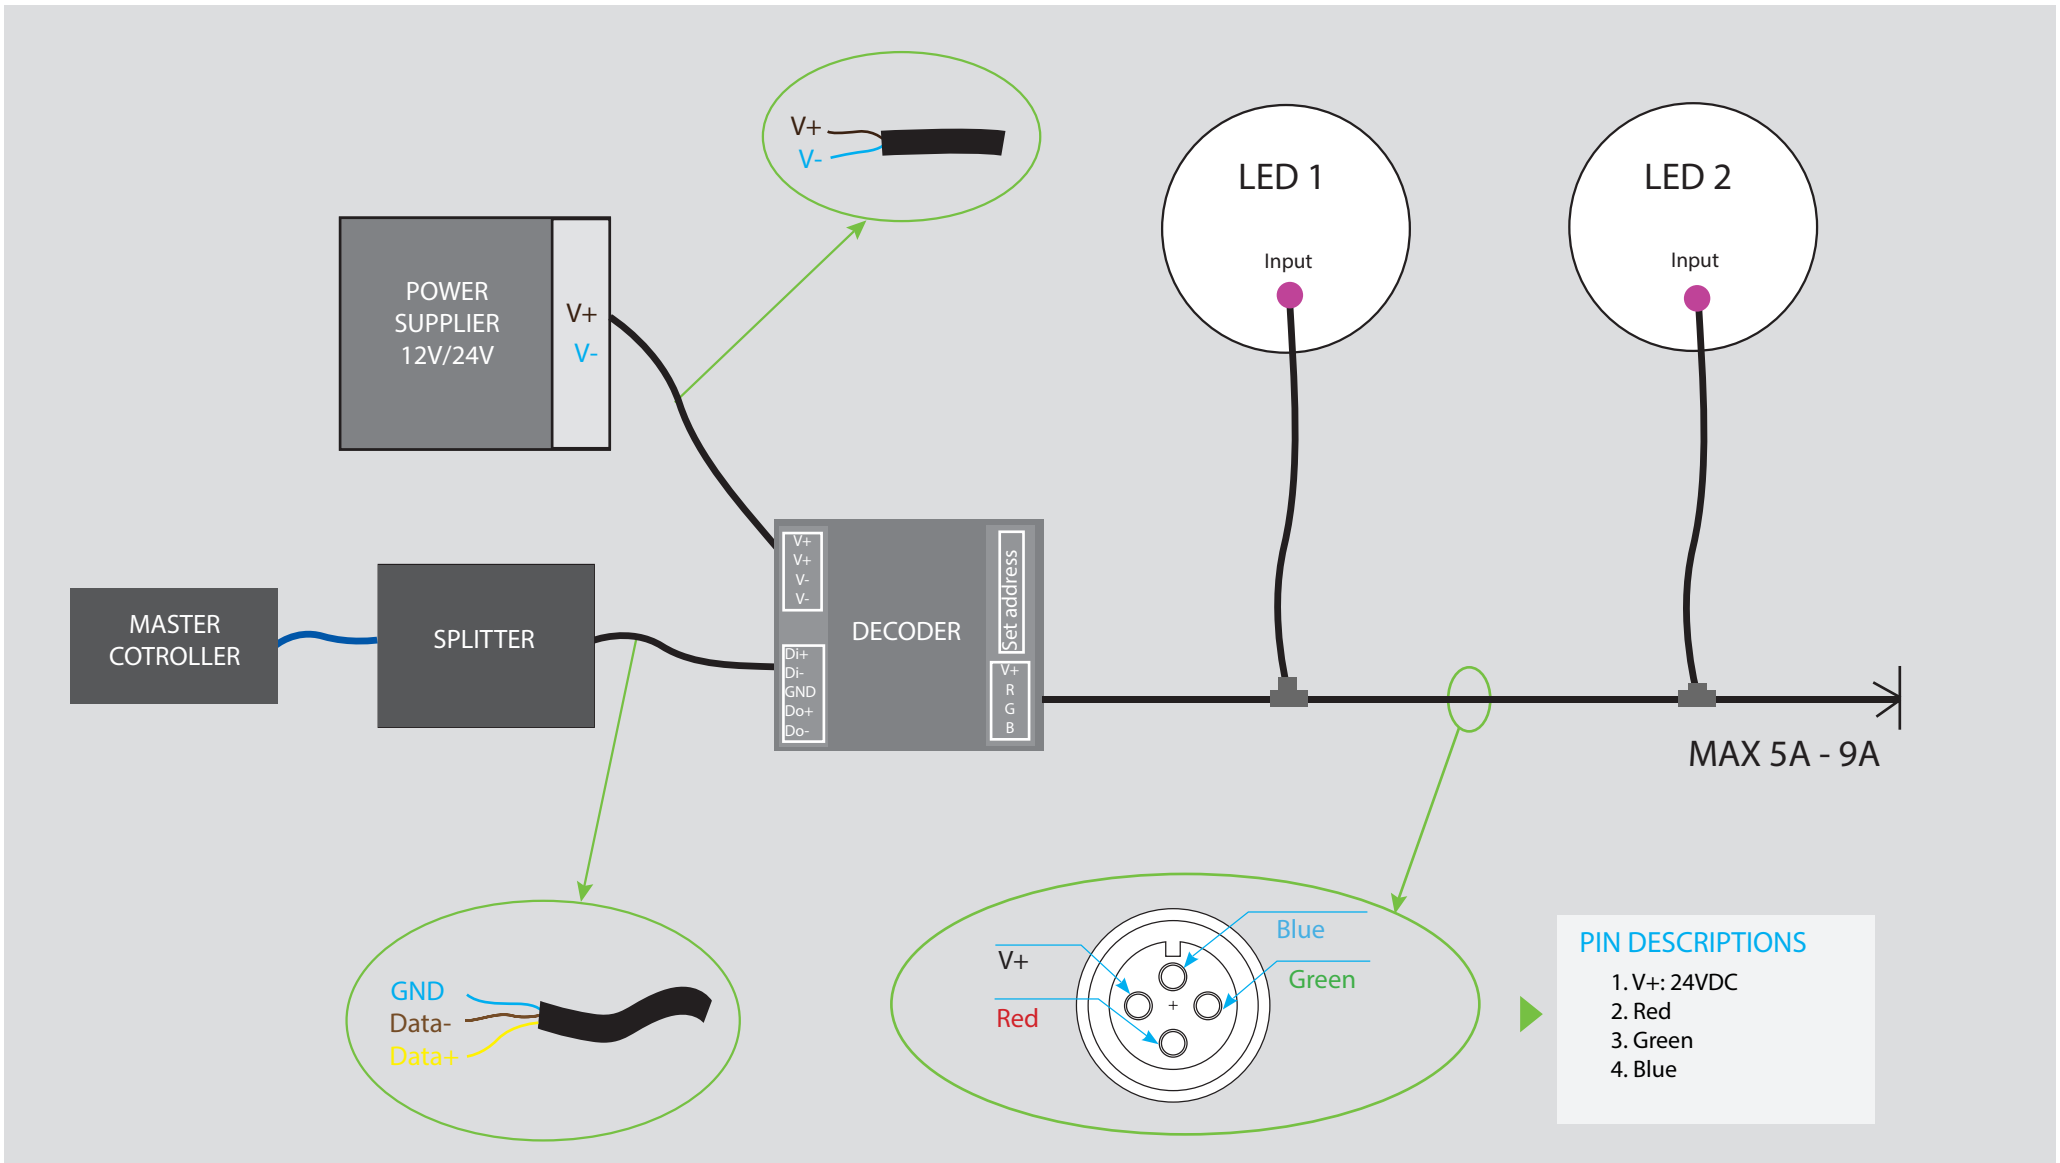

LED UNDER WATER LIGHT 9W

07

DIAGRAM CONNECTOR - DMX PROTOCOL - 5 CORE

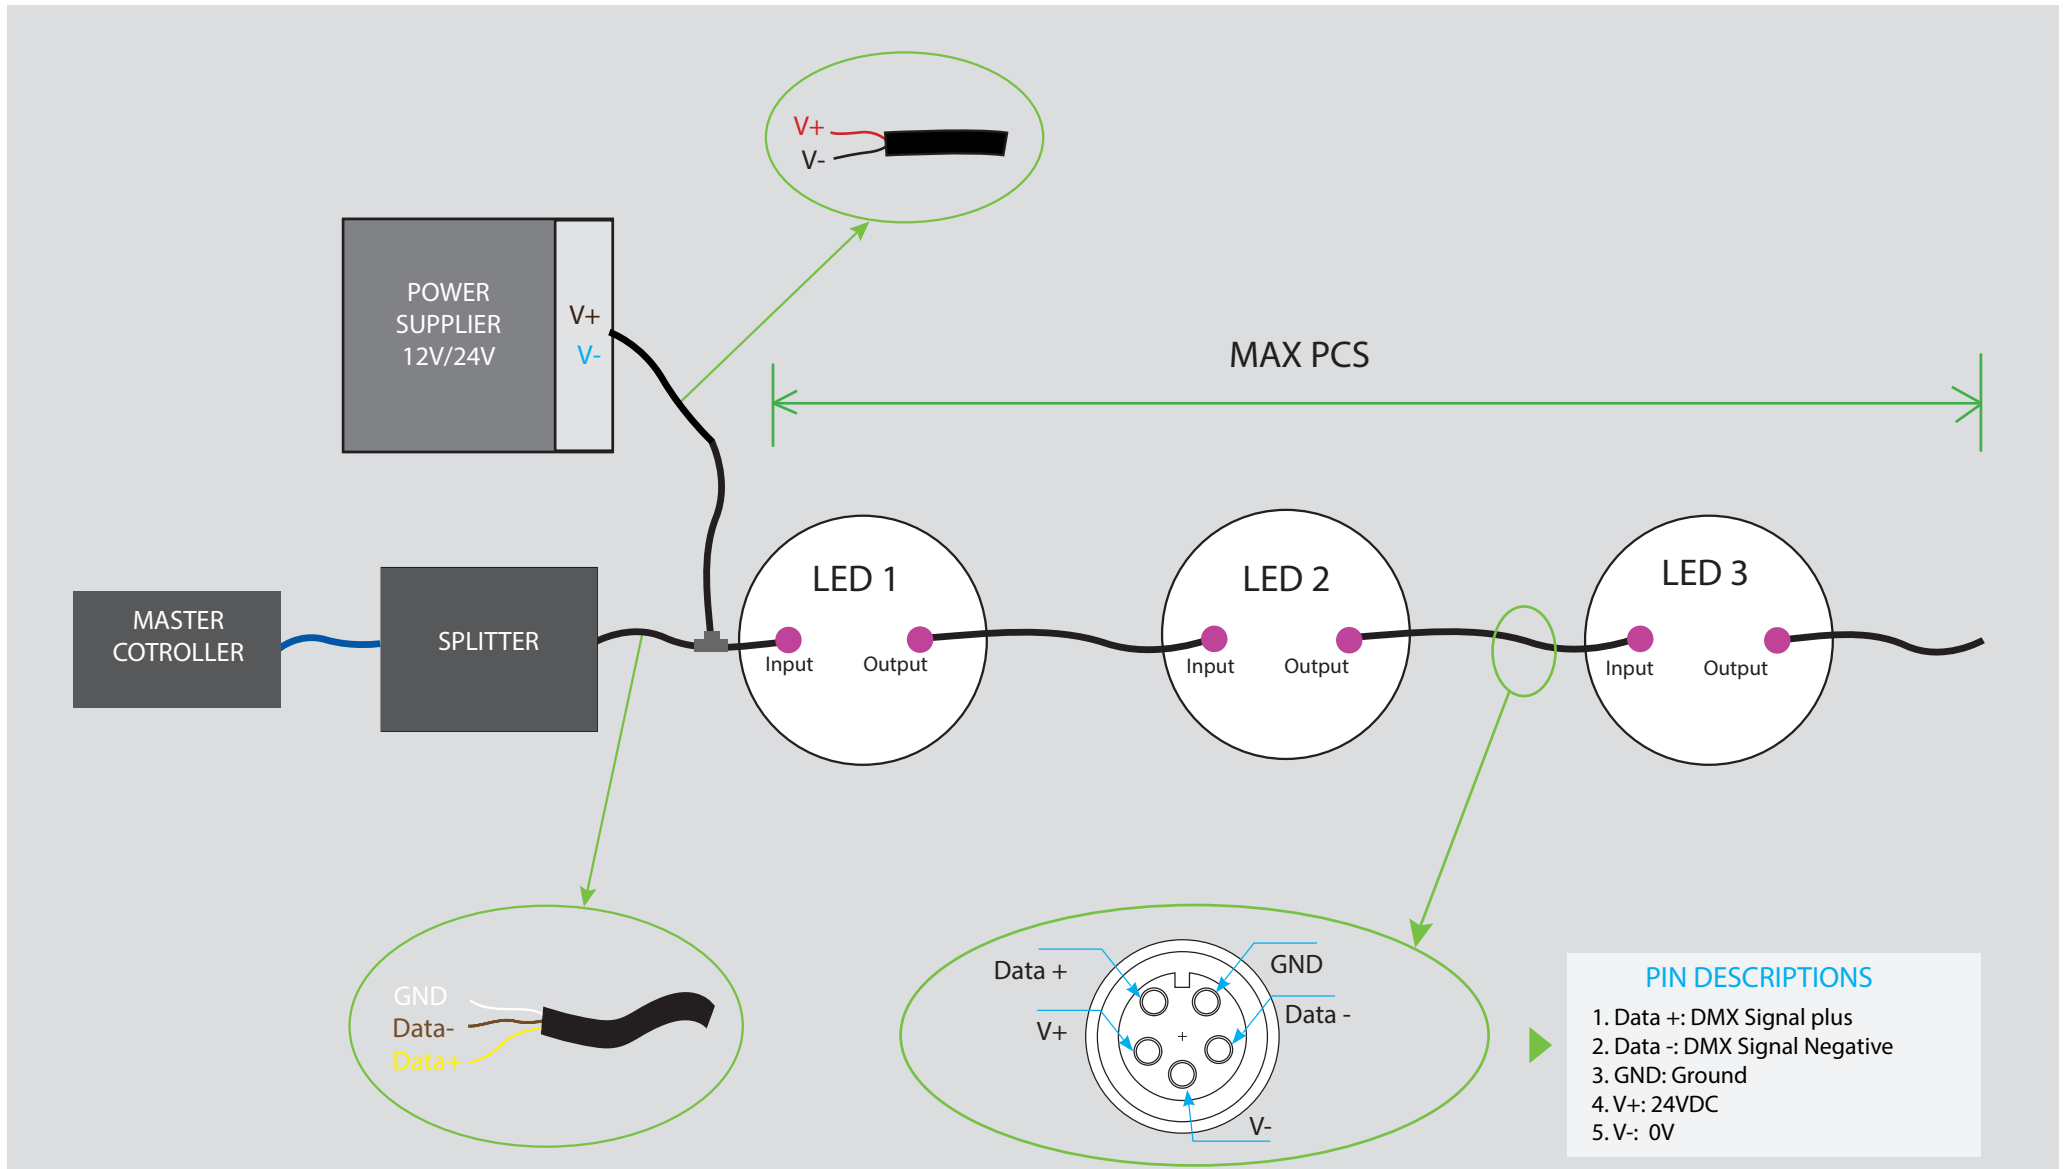

LED UNDER WATER LIGHT 9W - Applications

08




OUTDOOR



LANDSCAPE



HOTEL/RESTAURANT



LED UNDER WATER LIGHT 9W - Applications





THANKS FOR YOUR
ATTENTION